



Cylinders
High-Tech
Valves
Air treatment
Accessories
Power Clamps
GR8 Tooling

BUSINESS PROFILE**PRODUCT HISTORY****PNEUMATIC PRODUCT NEWS****AUTOMOTIVE PRODUCT NEWS****SALES NETWORK**

1

Cylinders



2

High-Tech



3

Valves



4

Air Treatment



5

Accessories



6

Power clamps



7

GR8 Tooling



UNIVER S.p.A.
Headquarters
20128 Milano - ITALY
Via Eraclito, 31
Tel. +39 02 25298.1
Fax +39 02 2575254
info@univer-group.com
www.univer-group.com

In light of technical updates, Univer S.p.A. reserves the right to modify technical features of their products with no obligation to issue prior notice.

Information contained in the present catalogue is pure indication, for further details about product technical features and related parameter values to be respected for a proper functioning, please refer to the datasheets available at:
www.univer-group.com

All rights reserved to Univer S.p.A. Unauthorized reproduction prohibited.



Since 1971 Leader in Industrial Automation



Early stages



Pneumatics



Automotive



GR8 Tooling



UNIVER has started its activity in the field of industrial automation during the 1970s, with the production of its first series of pneumatic valves and poppet valves for vacuum.



In the following decades, the widening range of technologically advanced and original pneumatic components has allowed the continuous growth and development of the company, which has become one of the major Italian businesses in the production of industrial automation equipment.



In 2000, after many years of experience in the supply of pneumatic components to the automotive market, the Automotive Division was created, thus developing numbers of solutions for BIW in the automotive industry.




New entry, the Division of Modular Tooling Systems (GR8) represents the new challenge in the press field and handling of metal sheets in Automotive and Industrial Automation.

Some of our customers





BUSINESS PROFILE

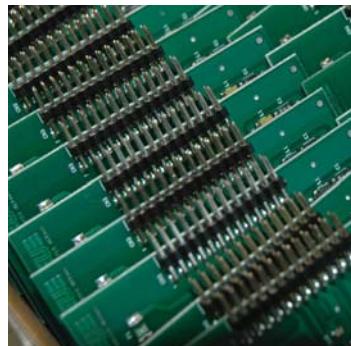

Electronics



Univer Service



Univer Group



The Electronic Division, supporting both Pneumatic Automation and Automotive divisions, is specialized in the study, design and manufacturing of the electric and electronic devices which are integrated in UNIVER products.



In Italy, the commercial company **UNIVER SERVICE S.r.l.** controls the domestic market and guarantees a quick and efficient service, thanks to different operational offices and distributors in the whole country.



The UNIVER Group has many direct branches and an active distribution network covering the most important industrialized areas.



Innovation
Research and Development
Quality
Training
Communication

www.univer-group.com





Since 1971 Leader in Industrial Automation



First valve series



ISO 6431 Pneumatic Cylinders



10 mm Nanovalve



2/3 stage Telescopic Pneumatic Cylinders

1970

1980

1990



1971 Foundation of UNIVER company

1973 Poppet valves for compressed air and vacuum

1980 Valves according to ISO 5599 (Industry Award)

1982 UNIVERSAL series valves

1986 Cylinders and mounting elements according to ISO 6431 (first cylinders on the market with extruded aluminium profile)

1988 Cylinders with antirotation piston and octagonal tube
Electrically actuated microvalves
Rodless cylinders (patented)

1989 Rotating cylinders (patented)
Short-stroke cylinders

1991 10 mm Nanovalve
G6 - G7 - G8 series valves


1992 Slide units in extruded aluminium profile

1993 Cybrain programmable actuators (patented)


1997 Telescopic cylinders (patented)

1998 Locking units (patented)

1999 Compact cylinders with supplied adjustable cushioning standard (patented)

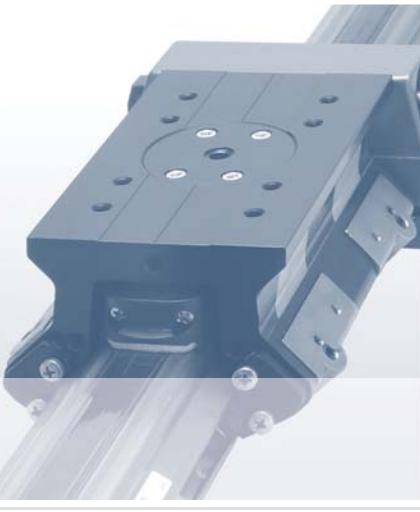

PRODUCT HISTORY

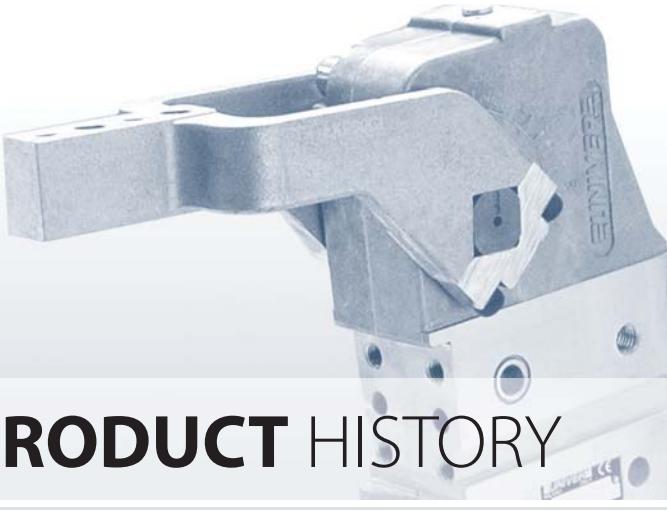


Pneumatic and Electric Power Clamps



COMPACT Valves



ISO 15552 Pneumatic Cylinders

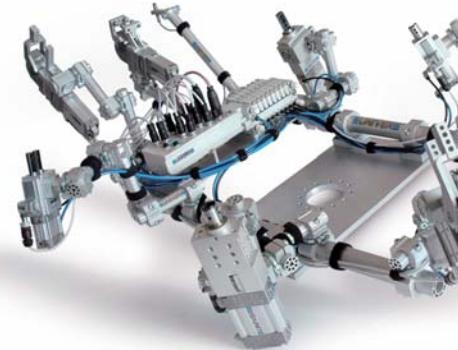

Modular Tooling System

2000

2010

- 2000** Combobox valves
- 2001** Pneumatic power clamps and retractable locating pin units
- 2002** Oval cylinders
- 2003** Electric cylinders (patented)
Electric power pivots
Electric power clamps and retractable locating pin units
- 2004** Valves according to ISO 15407/VDMA 24563
Serial communication control blocks
Pneumatic grippers
- 2005** Pneumatic power pivots (patented)
- 2006** 10 mm Nanovalve - 2nd generation
- 2007** COMPACT 10/15 mm valves
- 2008** TC Serial communication control system
- 2009** JL Guided compact cylinders

- 2010** KL Cylinders according to ISO 15552
- 2011** Compact cylinders Ø 80-100 according to ISO 21287
HZE Air treatment system
ISO 15552 Pneumatic cylinders
- 2012** 10 mm bistable Nanovalves
Marking unit
- 2013** P15E 15 mm COMPACT Valves
GR8 Modular Tooling System
- 2014** Short Stroke Cylinders - Tube New Design
Valves with panel operation
Pneumatic Gripper



Since 1971 Leader in Industrial Automation



KL

Ø 32 ÷ 125 mm Pneumatic Cylinders

Clean profile

Easier to clean

Quick installation

Sensors and connections on one side

UNIVER Technology

Strong and Reliable

ISO 15552

Interchangeability



P15E

15 mm COMPACT Valves

G1/8 - Threaded body and for sub-base mounting

High flow rate

Flow rate higher than 800 NL/min

Reduced dimensions

Body width 15 mm

Complete solution

Versions available 5/2 - 5/3 - 3/2+3/2



PNEUMATIC PRODUCT NEWS



LATCHING
Magnetic memory

B10/B11/B12

ISO 15218 10 mm Nanovalves

Low consumption B10
Standard B11
High flow rate B12

B11

Multipolar Sub-base

Compact


For 10 mm Nanovalves - ISO 15218

Multiple Sub-bases

Up to 24 valve places


Serial Communication System

TC series Connection

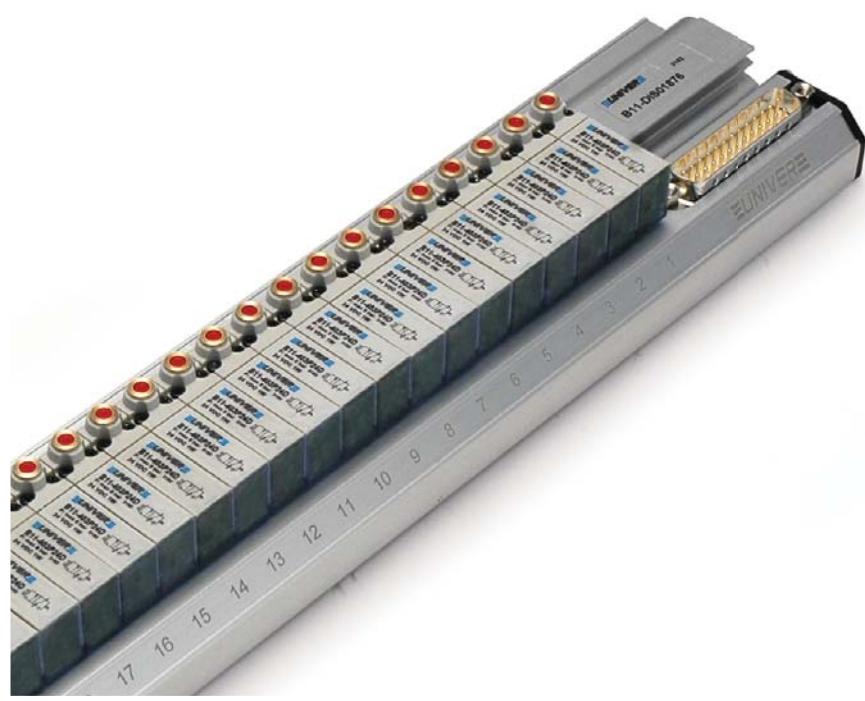



Since 1971 Leader in Industrial Automation

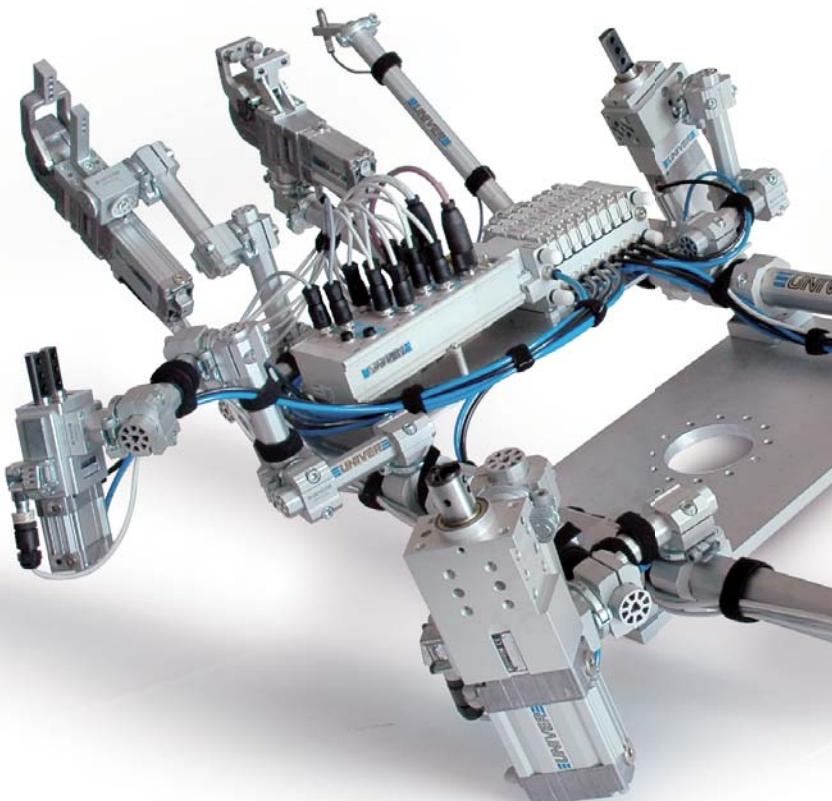

GR8

Modular Tooling System

High precision

High level of positional repeatability;
low deflection

Modular components

Considerable reduction of mounting components

Quick installation and set up

No welding or doweling required, easily
replaceable components

Fully adjustable

Unlimited orientation in space and free
configurations

FULLY CUSTOMIZABLE

Multiple configurations

EFFICIENT SYSTEM

A small range of standardized mounting elements
facilitates the sizing and the design of the tooling

PATENT PENDING



AUTOMOTIVE PRODUCT NEWS



LGP

Pneumatic Gripper

Stepless adjustable opening angle

From 0° to 160°

Toggle joint mechanism

Irreversible movement- without air supply

Two-sided sensor mounting position

Left and right side

360° Unlimited orbital mounting adjustment

Integrated shock absorber dampening system

- Limited air consumption
- UNIVER original electronic sensor with M12 swivel connector
- Easily field adjustable sans opening
- No maintenance required



Since 1971 Leader in Industrial Automation

Univer Service



In Italy, the commercial company **UNIVER SERVICE S.r.l.** controls the domestic market and guarantees a quick and efficient service, thanks to different operational offices and distributors in the whole country.



UNIVER SERVICE S.r.l.

Headquarters

20128 Milano - ITALY

Via Empedocle, 20

Tel. +39 02 25298.1

Fax +39 02 25298370

universervice@universervice.it

LOMBARDIA



UNIVER SERVICE S.r.l.
Milano
universervice@universervice.it



UNIVER SERVICE S.r.l.
Bergamo
castellicalepio@universervice.it



UNIVER SERVICE S.r.l.
Como
monguzzo@universervice.it

PIEMONTE/LIGURIA/VALLE D'AOSTA



UNIVER SERVICE S.r.l.
Torino
torino@universervice.it

EMILIA ROMAGNA - CENTRO/SUD



UNIVER SERVICE S.r.l.
Bologna
bologna@universervice.it

VENETO/FRIULI-VENEZIA GIULIA/TRENTINO-ALTO ADIGE



UNIVER SERVICE S.r.l.
Venezia
[vigono@universervice.it](mailto:vigonovo@universervice.it)

www.univer-group.com




SALES NETWORK

Univer Group



The UNIVER Group has many direct branches and an active distribution network covering the most important industrialized areas.

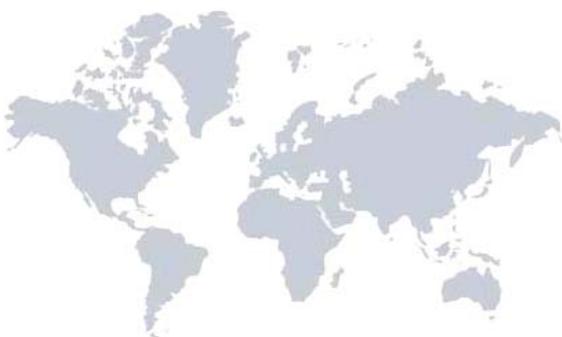

UNIVER S.p.A.
Headquarters
20128 Milano - ITALY
Via Eraclito, 31
Tel. +39 02 25298.1
Fax +39 02 2575254
info@univer-group.com

BRAZIL



UNIVER do Brasil S/A
univerbrasil@univer.com.br

FRANCE



UNIVER FRANCE Sas
info@univer-france.fr

GERMANY



UNIVER G.m.b.H.
info@univer-gmbh.de

USA



UNIVER NORTH AMERICA
info@univer-group.us

POLAND



UNIVER Polska Sp. z o.o.
univer@univer-group.pl

SPAIN



UNIVER S.L.
System Supplier Pneumatic
univer@univerweb.com

1



Cylinders

	Standards-based Cylinders	M KL KE KD K	2 4 6 7 8/9
---	---------------------------	--------------------------	-------------------------

	Standards-based Compact Cylinders	RP RM RO RN RS RQ	11 12 13 14 16 17
--	-----------------------------------	----------------------------------	----------------------------------

	Oval Cylinders	OV	19
---	----------------	----	----

	Short-stroke Cylinders	W	20
---	------------------------	---	----

	Rotary Cylinders	R YR2 YR3	21 22 23
---	------------------	-----------------	----------------

	Rodless Cylinders	S1 S5 VL1	25 26 27
---	-------------------	-----------------	----------------

	Guided Cylinders	J JL JT/JX	29 32 33
---	------------------	------------------	----------------

	Shock Absorbers	YDA/YDR	34
---	-----------------	---------	----

	Assembly Kits	M/K RP/RM RO/RN RS/RQ S1/S5/VL1	35 36 36 36 37
---	---------------	---	----------------------------

CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	aluminium, crimped on barrel
Barrel	stainless steel
Piston	brass (Ø8÷16), aluminium (Ø20-25)
Guide slide	acetalic resin
Piston rod	stainless steel
Piston seal	NBR
Guide bush for piston rod	standard supplied
Shock absorber seals	NBR
Cushionings	pneumatic adjustable (Ø16÷25)



CODIFICATION KEY

M	1	0	0	0	2	5	0	0	5	0	
1	2	3			4		5		6	7	

1 Series	2 Type	3 Version	4 Option	5 Magnetic
M = Ø8÷25 mm - ISO 6432 Microcylinders	1 = Stainless steel piston rod (standard version) 2 = Chromium-plated steel piston rod (to be used only with locking unit) 3 = Reduced version with stainless steel piston rod	00 = D.A. Standard version 01 = D.A. Through piston rod 50 = D.A. With adjustable cushionings (Ø16÷25)	51 = D.A. Through piston rod with adjustable cushionings (Ø16÷25) 60 = S.A. Retracted piston rod (Ø10÷25), Max stroke 50 mm 70 = S.A. Extended piston rod (Ø16÷25), Max stroke 25 mm	
		D.A. = Double acting S.A. = Single acting		
4 Bore (mm)	5 Stroke (mm)	6 Option	7 Magnetic	
008 = Ø8 010 = Ø10 012 = Ø12 016 = Ø16 020 = Ø20 025 = Ø25	0010 = 10 0020 = 20 0025 = 25 0030 = 30 0040 = 40 0050 = 50 0075 = 75	0080 = 80 0100 = 100 0125 = 125 0150 = 150 0160 = 160 0175 = 175 0200 = 200	0250 = 250 0300 = 300 0320 = 320 0400 = 400 0500 = 500	F = Preset for locking unit reduced protrusion M = Magnetic version (Ø10÷25)

M190 version with high temperature seals (Max 120°C) available upon request

FIXING ELEMENTS AND ACCESSORIES

Ø	Female fork with clips	Articulated self-lubricating fork	Fork with axially mounted articulated pin	Fork with angle mounted articulated pin	Floating joint	Female rear hinge	Angle bracket	Flange	Nut for end-cap	Holder for DF sensor	DF sensor
8											
10	MF-15008	MF-17008	-	-	-	MF-21008	MF-13008	MF-12008	MF-20008	-	
12	MF-15012	MF-17012	MF-22016	MF-23012	MF-24012	MF-21008	MF-13008	MF-12008	MF-20008	MF-20008	MF-20008
16	MF-15012	MF-17012	MF-22016	MF-23012	MF-24012	MF-21012	MF-13012	MF-12012	MF-20012	MF-20012	MF-20012
20	MF-15020	MF-17020	MF-22020	MF-23020	MF-24020	MF-21020	MF-13020	MF-12020	MF-20020	MF-20020	MF-20020
25	KF-15032	KF-17032	KF-22025	KF-23025	KF-24032	MF-21020	MF-13020	MF-12020	MF-20020	MF-20020	MF-20020

Ø	Holder for DH sensor	DH sensor
8		
10	-	
12	DH-M10	
16	DH-M12	
20	DH-M16	
25	DH-M20	
	DH	
	DH-M25	

Through piston rod 	Reduced version with adjustable cushionings
-----------------------------------	--

K | ISO 15552 Cylinders



KL NEW

CLEAN PROFILE

Easier to clean

QUICK INSTALLATION

Sensors and connections on one side

UNIVER TECHNOLOGY

Strong and Reliable

ISO 15552

Interchangeability


KE

Ø 32 ÷ 125 mm



KL


Ø 32 ÷ 125 mm



NEW CLEAN PROFILE

KD

Ø 32 ÷ 125 mm



K 160/200

Ø 160 - 200 mm



KIT Assembly Kit
available for all series



CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	die-cast aluminium
Barrel	anodized aluminium
Piston	die-cast aluminium
Guide slide	acetalic resin
Piston rod	chromium-plated steel, stainless steel upon request
Piston seal	NBR
Guide bush for piston rod	UNIVER Original self-lubricating and self-aligning
Shock absorber seals	NBR
Cushionings	pneumatic adjustable
Other available versions	tandem, two-position tandem, opposed, with common piston rod (upon request)


CODIFICATION KEY

K	L	2	0	0	0	3	2	0	0	5	0	M
1	2	3	4	5	6	7						


1 Series	2 Type	3 Version	4 Bore (mm)
KL = Ø 32÷125 mm - ISO 15552	1 = Stainless steel piston rod	00 = D.A. Standard version	032 = Ø32 080 = Ø80
Pneumatic Cylinders	2 = Chromium-plated steel piston rod	01 = D.A. Through piston rod	040 = Ø40 100 = Ø100
Magnetic version standard supplied		60 = S.A. Retracted piston rod Max stroke 50 mm	050 = Ø50 125 = Ø125
		70 = S.A. Extended piston rod Max stroke 50 mm	063 = Ø63
		D.A. = Double acting	
		S.A. = Single acting	
5 Stroke (mm)	6 Option	7 Magnetic	
0025 = 25 0150 = 150 0320 = 320 0700 = 700	F = Preset for locking unit reduced protrusion	M = Magnetic version standard supplied	
0050 = 50 0160 = 160 0350 = 350 0800 = 800	G = Preset for locking unit ISO protrusion		
0075 = 75 0175 = 175 0400 = 400 0900 = 900			
0080 = 80 0200 = 200 0450 = 450 1000 = 1000			
0100 = 100 0250 = 250 0500 = 500			
0125 = 125 0300 = 300 0600 = 600			

KL190 and KL290 versions with high temperature seals (Max 120°C) and versions with low temperature seals available upon request

FIXING ELEMENTS AND ACCESSORIES

Ø	Female fork with clips	Articulated self-lubricating fork	Fork with axially mounted articulated pin	Fork with angle mounted articulated pin	Floating joint	Female rear hinge with pin	Counter hinge 90° (CETOP)	Counter hinge	Counter hinge 90° (CNOMO)	Narrow female hinge with pin	Articulated counter hinge
32											
40	KF-15032	KF-17032	KF-22025	KF-23025	KF-24032	KF-10032A	KF-19032CTA	KF-19032	KF-19032CN	KF-10032AS	KF-19032SC
50	KF-15040	KF-17040	KF-22040	KF-23040	KF-24040	KF-10040A	KF-19040CTA	KF-19040	KF-19040050CN	KF-10040AS	KF-19040SC
50	KF-15050	KF-17050	KF-22050	KF-23050	KF-24050	KF-10050A	KF-19050CTA	KF-19050	KF-19040050CN	KF-10050AS	KF-19050SC
63	KF-15050	KF-17050	KF-22050	KF-23050	KF-24050	KF-10063A	KF-19063CTA	KF-19063	KF-19063080CN	KF-10063AS	KF-19063SC
80	KF-15080	KF-17080	KF-22080	KF-23080	KF-24080	KF-10080A	KF-19080CTA	KF-19080	KF-19063080CN	KF-10080AS	KF-19080SC
100	KF-15080	KF-17080	KF-22080	KF-23080	KF-24080	KF-10100A	KF-19100CTA	KF-19100	KF-19100125CN	KF-10100AS	KF-19100SC
125	KF-15125	KF-17125	-	-	-	KF-10125A	KF-19125CTA	-	KF-19100125CN	KF-10125AS	KF-19125SC
Ø	Articulated rear male hinge	Rear male hinge	Front/rear flange	Angle bracket	Front/rear hinge with floating pin	Hinge support	ISO intermediate hinge	DF sensor and DHF covering strip			
32											
40	KF-11032S	KF-11032	KF-12032	KF-13032	KF-14032AP	KF-41032	KLF-14032				
50	KF-11040S	KF-11040	KF-12040	KF-13040	KF-14040AP	KF-41040050	KLF-14040				
50	KF-11050S	KF-11050	KF-12050	KF-13050	KF-14050AP	KF-41040050	KLF-14050				
63	KF-11063S	KF-11063	KF-12063	KF-13063	KF-14063AP	KF-41063080	KLF-14063				
80	KF-11080S	KF-11080	KF-12080	KF-13080	KF-14080AP	KF-41063080	KLF-14080				
100	KF-11100S	KF-11100	KF-12100	KF-13100	KF-14100AP	KF-41100125	KLF-14100				
125	KF-11125S	KF-11125	KF-12125	KF-13125	KF-14125AP	KF-41100125	KLF-14125				

DF DHF-0020100



Tube profile with integrated
sensor grooves
UNIVER Original since 2005



Recessed sensor
DF series



Magnetic piston
standard supplied



Fixing screws integrated in
the end-cap profile



Sensor grooves available
in different positions




Possibility to mount DH
sensors with brackets



Intermediate hinge with locking
system guaranteed by UNIVER
AUTOMOTIVE expertise




Standard fixing elements
UNIVER Original

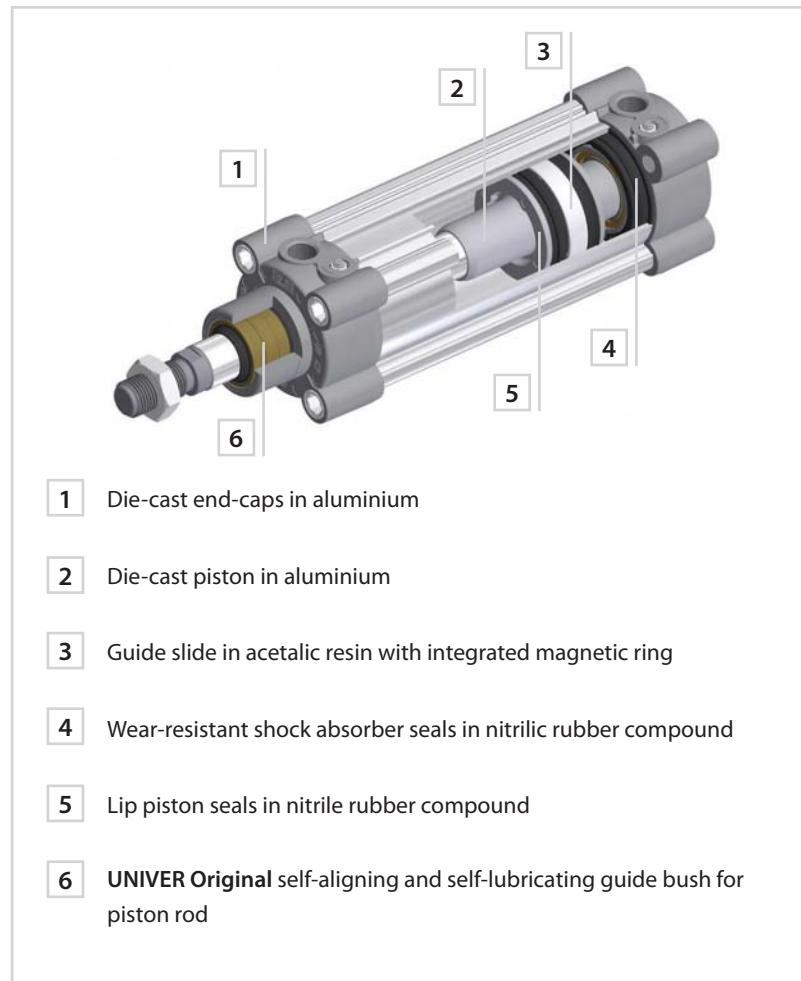


Further available versions


■ Cylinder with L1-N locking unit





■ Tandem cylinder
Two-position tandem cylinder



■ Opposed cylinders



■ Cylinders with common piston rod



CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	die-cast aluminium
Barrel	anodized aluminium
Piston	die-cast aluminium
Guide slide	acetalic resin
Piston rod	chromium-plated steel, stainless steel upon request
Piston seal	NBR
Guide bush for piston rod	UNIVER Original self-lubricating and self-aligning
Shock absorber seals	NBR
Cushionings	pneumatic adjustable
Other available versions	tandem, two-position tandem, opposed, with common piston rod (upon request)



CODIFICATION KEY

K	E	2	0	0	0	3	2	0	0	5	0	
1	2	3	4			5		6	7			

1 Series	2 Type	3 Version	4 Bore (mm)
KE = Ø 32÷125 mm - ISO 15552 Pneumatic Cylinders	1 = Stainless steel piston rod 2 = Chromium-plated steel piston rod	00 = D.A. Standard version 01 = D.A. Through piston rod 60 = S.A. Retracted piston rod Max stroke 50 mm 70 = S.A. Extended piston rod Max stroke 50 mm	032 = Ø 32 080 = Ø 80 040 = Ø 40 100 = Ø 100 050 = Ø 50 125 = Ø 125 063 = Ø 63
K = Ø 32÷125 mm - ISO 15552 Pneumatic Cylinders (former ISO 6431 VDMA 24562) (available upon request)		D.A. = Double acting S.A. = Single acting	
5 Stroke (mm)	6 Option	7 Magnetic	
0025 = 25 0150 = 150 0320 = 320 0700 = 700 0050 = 50 0160 = 160 0350 = 350 0800 = 800 0075 = 75 0175 = 175 0400 = 400 0900 = 900 0080 = 80 0200 = 200 0450 = 450 1000 = 1000 0100 = 100 0250 = 250 0500 = 500 0125 = 125 0300 = 300 0600 = 600	F = Preset for locking unit reduced protrusion G = Preset for locking unit ISO protrusion	M = Magnetic version	

KE190 and KE290 versions with high temperature seals (Max 120°C) and versions with low temperature seals available upon request


FIXING ELEMENTS AND ACCESSORIES

Ø	Female fork with clips	Articulated self-lubricating fork	Fork with axially mounted articulated pin	Fork with angle mounted articulated pin	Floating joint	Female rear hinge with pin	Counter hinge 90° (CETOP)	Counter hinge 90°	Counter hinge 90° (CNOMO)	Narrow female hinge with pin	Articulated counter hinge
32											
40	KF-15032	KF-17032	KF-22025	KF-23025	KF-24032	KF-10032A	KF-19032CTA	KF-19032	KF-19032CN	KF-10032AS	KF-19032SC
50	KF-15040	KF-17040	KF-22040	KF-23040	KF-24040	KF-10040A	KF-19040CTA	KF-19040	KF-19040050CN	KF-10040AS	KF-19040SC
50	KF-15050	KF-17050	KF-22050	KF-23050	KF-24050	KF-10050A	KF-19050CTA	KF-19050	KF-19040050CN	KF-10050AS	KF-19050SC
63	KF-15050	KF-17050	KF-22050	KF-23050	KF-24050	KF-10063A	KF-19063CTA	KF-19063	KF-19063080CN	KF-10063AS	KF-19063SC
80	KF-15080	KF-17080	KF-22080	KF-23080	KF-24080	KF-10080A	KF-19080CTA	KF-19080	KF-19063080CN	KF-10080AS	KF-19080SC
100	KF-15080	KF-17080	KF-22080	KF-23080	KF-24080	KF-10100A	KF-19100CTA	KF-19100	KF-19100125CN	KF-10100AS	KF-19100SC
125	KF-15125	KF-17125	-	-	-	KF-10125A	KF-19125CTA	-	KF-19100125CN	KF-10125AS	KF-19125SC
Ø	Articulated rear male hinge	Rear male hinge	Front / rear flange	Angle bracket	Front / rear hinge with floating pin	Hinge support	ISO Intermediate hinge	ISO Intermediate hinge	DF sensor and DHF covering strip	DH sensor	Mounting bracket for DH sensor
32											
40	KF-11032S	KF-11032	KF-12032	KF-13032	KF-14032AP	KF-41032	KLF-14032	KF-14032	*	*	*
50	KF-11040S	KF-11040	KF-12040	KF-13040	KF-14040AP	KF-41040050	KLF-14040	KF-14040	DF DHF-002100	DH	DH-K032050
50	KF-11050S	KF-11050	KF-12050	KF-13050	KF-14050AP	KF-41040050	KLF-14050	KF-14050			DH-K032050
63	KF-11063S	KF-11063	KF-12063	KF-13063	KF-14063AP	KF-41063080	KLF-14063	KF-14063			DH-K032050
80	KF-11080S	KF-11080	KF-12080	KF-13080	KF-14080AP	KF-41063080	KLF-14080	KF-14080			DH-K032050
100	KF-11100S	KF-11100	KF-12100	KF-13100	KF-14100AP	KF-41100125	KLF-14100	KF-14100			DH-K032050
125	KF-11125S	KF-11125	KF-12125	KF-13125	KF-14125AP	KF-41100125	KLF-14125	KF-14125			DH-K032050

* = Fixing elements and accessories for K series

CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	die-cast aluminium
Barrel	anodized aluminium
Piston	die-cast aluminium
Guide slide	acetalic resin
Piston rod	chromium-plated steel, stainless steel upon request
Piston seal	NBR
Guide bush for piston rod	UNIVER Original self-lubricating and self-aligning
Shock absorber seals	NBR
Cushionings	pneumatic adjustable
Other available versions	tandem, two-position tandem, opposed, with common piston rod (upon request)



CODIFICATION KEY

K	D	2	0	0	0	3	2	0	0	5	0	M
1	2	3	4			5		6	7			

1 Series	2 Type	3 Version	4 Bore (mm)
KD = Ø 32÷125 mm - ISO 15552 Pneumatic Cylinders (former ISO 6431 and VDMA 24562)	1 = Stainless steel piston rod 2 = Chromium-plated steel piston rod	00 = D.A. Standard version 01 = D.A. Through piston rod 60 = S.A. Retracted piston rod Max stroke 50 mm 70 = S.A. Extended piston rod Max stroke 50 mm	032 = Ø32 080 = Ø80 040 = Ø40 100 = Ø100 050 = Ø50 125 = Ø125 063 = Ø63
Magnetic version standard supplied		D.A. = Double acting S.A. = Single acting	
5 Stroke (mm)	6 Option	7 Magnetic	
0025 = 25 0150 = 150 0320 = 320 0700 = 700 0050 = 50 0160 = 160 0350 = 350 0800 = 800 0075 = 75 0175 = 175 0400 = 400 0900 = 900 0080 = 80 0200 = 200 0450 = 450 1000 = 1000 0100 = 100 0250 = 250 0500 = 500 0125 = 125 0300 = 300 0600 = 600	F = Preset for locking unit reduced protrusion G = Preset for locking unit ISO protrusion	M = Magnetic version standard supplied	

KD190 and KD290 versions with high temperature seals (max 120°C) and versions with low temperature seals available upon request

FIXING ELEMENTS AND ACCESSORIES

Ø	Female fork with clips	Articulated self-lubricating fork	Fork with axially mounted articulated pin	Fork with angle mounted articulated pin	Floating joint	Female rear hinge with pin	Counter hinge 90° (CETOP)	Counter hinge 90°	Counter hinge 90° (CNOMO)	Narrow female hinge with pin	Articulated counter hinge
32											
40	KF-15032	KF-17032	KF-22025	KF-23025	KF-24032	KF-10032A	KF-19032CTA	KF-19032	KF-19032CN	KF-10032AS	KF-19032SC
50	KF-15040	KF-17040	KF-22040	KF-23040	KF-24040	KF-10040A	KF-19040CTA	KF-19040	KF-19040050CN	KF-10040AS	KF-19040SC
63	KF-15050	KF-17050	KF-22050	KF-23050	KF-24050	KF-10050A	KF-19050CTA	KF-19050	KF-19040050CN	KF-10050AS	KF-19050SC
80	KF-15080	KF-17080	KF-22080	KF-23080	KF-24080	KF-10080A	KF-19080CTA	KF-19080	KF-19063080CN	KF-10080AS	KF-19080SC
100	KF-15080	KF-17080	KF-22080	KF-23080	KF-24080	KF-10100A	KF-19100CTA	KF-19100	KF-19100125CN	KF-10100AS	KF-19100SC
125	KF-15125	KF-17125	-	-	-	KF-10125A	KF-19125CTA	-	KF-19100125CN	KF-10125AS	KF-19125SC
Ø	Articulated rear male hinge	Rear male hinge	Front / rear flange	Angle bracket	Front / rear hinge with floating pin	Hinge support	ISO Intermediate hinge	DF sensor and DHF covering strip	Cable clamping for DF sensor		
32											
40	KF-11032S	KF-11032	KF-12032	KF-13032	KF-14032AP	KF-41032	KDF-14032				
50	KF-11040S	KF-11040	KF-12040	KF-13040	KF-14040AP	KF-41040050	KDF-14040				
63	KF-11050S	KF-11050	KF-12050	KF-13050	KF-14050AP	KF-41040050	KDF-14050				
80	KF-11063S	KF-11063	KF-12063	KF-13063	KF-14063AP	KF-41063080	KDF-14063				
100	KF-11080S	KF-11080	KF-12080	KF-13080	KF-14080AP	KF-41063080	KDF-14080				
125	KF-11100S	KF-11100	KF-12100	KF-13100	KF-14100AP	KF-41100125	KDF-14100				
	KF-11125S	KF-11125	KF-12125	KF-13125	KF-14125AP	KF-41100125	KDF-14125				
								DF DHF-0020100	DF-001		

CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	die-cast aluminium
Barrel	anodized aluminium
Tie-rods	zinc-plated steel
Piston	die-cast aluminium
Guide slide	acetalic resin
Piston rod	chromium-plated steel, stainless steel upon request
Piston rod scraper seals	NBR
Piston seals	polyurethane (Ø160) - NBR (Ø200)
Cushionings	pneumatic adjustable
Other available versions	tandem, two-position tandem, opposed, with common piston rod (upon request)


CODIFICATION KEY

K	2	0	0	1	6	0	0	0	8	0	
1	2	3		4		5		6			

1 Series	2 Type	3 Version	4 Bore (mm)
K = Ø 160/200 mm - ISO 15552 Pneumatic Cylinders	1 = Stainless steel piston rod 2 = Chromium-plated steel piston rod	00 = D.A. Standard version 01 = D.A. Through piston rod	160 = Ø160 200 = Ø200

D.A. = Double acting

5 Stroke (mm)	6 Magnetic									
0025 = 25 0150 = 150 0320 = 320 0700 = 700 0050 = 50 0160 = 160 0350 = 350 0800 = 800 0075 = 75 0175 = 175 0400 = 400 0900 = 900 0080 = 80 0200 = 200 0450 = 450 1000 = 1000 0100 = 100 0250 = 250 0500 = 500 0125 = 125 0300 = 300 0600 = 600	M = Magnetic version									

K190 and K290 versions with high temperature seals (Max 120°C) and versions with low temperature seals available upon request
FIXING ELEMENTS AND ACCESSORIES

Ø	Female fork with clips	Articulated self-lubricating fork	Female rear hinge with pin	Counter hinge 90° (CETOP)	Counter hinge 90° (CNOMO)	Narrow female hinge with pin	Articulated rear male hinge	Rear male hinge	Front/rear flange	Angle bracket	Front / rear hinge with floating pin
160											
	KF-15160	KF-17160	KF-10160A	KF-19160CTA	KF-19160200CN	KF-10160AS	KF-11160S	KF-11160	KF-12160	KF-13160	KF-14160AP
200	KF-15160	KF-17160	KF-10200A	KF-19200CTA	KF-19160200CN	KF-10200AS	KF-11200S	KF-11200	KF-12200	KF-13200	KF-14200AP

Ø	Hinge support	ISO intermediate hinge	DH sensor	Mounting bracket for DH sensor
160				
	KF-41160200	KF-14160	DH	DH-K160200
200	KF-41160200	KF-14200		DH-K160200

Ø160/200 Cylinder with profiled tube (version available upon request)


CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	die-cast aluminium
Barrel	anodized aluminium
Tie-rods	zinc-plated steel
Piston	die-cast aluminium
Guide slide	acetalic resin
Piston rod	chromium-plated steel, stainless steel upon request
Piston rod scraper seals	NBR
Piston seals	NBR
Cushionings	pneumatic adjustable



CODIFICATION KEY

K	2	0	0	2	5	0	0	0	8	0	
1	2	3		4		5		6			

1 Series	2 Type	3 Version	4 Bore (mm)
K = Ø 250/320 mm - ISO 15552 Pneumatic Cylinders	1 = Stainless steel piston rod 2 = Chromium-plated steel piston rod	00 = D.A. Standard version 01 = D.A. Through piston rod	250 = Ø250 320 = Ø320

D.A. = Double acting

5 Stroke (mm)	6 Magnetic							
0025 = 25	0150 = 150	0320 = 320	0700 = 700					M = Magnetic version
0050 = 50	0160 = 160	0350 = 350	0800 = 800					
0075 = 75	0175 = 175	0400 = 400	0900 = 900					
0080 = 80	0200 = 200	0450 = 450	1000 = 1000					
0100 = 100	0250 = 250	0500 = 500						
0125 = 125	0300 = 300	0600 = 600						

FIXING ELEMENTS AND ACCESSORIES

Ø	Female fork with clips	Articulated self-lubricating fork	Female rear hinge with pin	Rear male hinge	Front/rear flange	Angle bracket	Hinge support	ISO intermediate hinge
250								
	KF-15250	KF-17250	KF-10250AC	KF-11250C	KF-12250	KF-13250	KF-41250	KF-14250
320								
	KF-15320	KF-17320	KF-10320AC	KF-11320C	KF-12320	KF-13320	KF-41320	KF-14320

Magnetic sensors upon request



Adjustable pneumatic cushioning

UNIVER Original since 1999

- No change in dimensions comparing to an equivalent cylinder without cushionings
- Standard supplied for all models

STANDARDS-BASED

Available in compliance with UNITOP and ISO 21287 standards

STANDARD AND OCTAGONAL TUBE

Available in standard version and non-rotating version with UNIVER Original octagonal tube



Standard



Octagonal



RP/RM

RP (UNITOP RU-2/7)
Ø 16 ÷ 63 mm



RM (ISO 21287)
Ø 16 ÷ 100 mm



RP210

With anti-rotation guides
Ø 16 ÷ 63 mm



RO/RN


RO (UNITOP RU-2/7)
Ø 16 ÷ 63 mm



RN (ISO 21287)
Ø 16 ÷ 63 mm



Non-rotating (octagonal tube) version
Max load (Nm)



Ø	Nm
16	0,5
20	0,8
25	1
32	2
40	3
50	5
63	8



Assembly Kit
available for all series



CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	die-cast aluminium
Barrel	anodized aluminium
Piston	aluminium
Guide slide	acetalic resin
Piston rod	chromium-plated steel, stainless steel upon request
Piston seal	NBR
Guide bush for piston rod	acetalic resin
Shock absorber seals	NBR
Cushionings	pneumatic adjustable (UNIVER Original standard supplied)
Magnet	standard supplied
Other available versions	tandem, two-position tandem, opposed, with common piston rod (upon request)



CODIFICATION KEY

R	P	2	0	0	0	3	2	0	0	2	5	
1	2	3	4			5			6			

1 Series	2 Type	3 Version
RP = Ø 16÷63 mm UNITOP Compact Cylinders	1 = Stainless steel female piston rod 2 = Chromium-plated steel female piston rod	00 = D.A. Standard version 01 = D.A. Through piston rod 10 = D.A. Non-rotating guided piston rod 11 = D.A. Non-rotating guided through piston rod 20 = D.A. Long piston (Ø32÷63) 60 = S.A. Retracted piston rod 70 = S.A. Extended piston rod D.A. = Double acting S.A. = Single acting
	Upon request 3 = Stainless steel male piston rod (Ø40÷63) 4 = Chromium-plated steel male piston rod (Ø40÷63)	
4 Bore (mm)	5 Stroke (mm)	6 Option
016 = Ø16 040 = Ø40 020 = Ø20 050 = Ø50 025 = Ø25 063 = Ø63 032 = Ø32	Single acting 0005 - 0010 (Ø16÷25) 0005 - 0010 - 0015 - 0020 - 0025 (Ø32÷63) Double acting 0005 - 0010 - 0015 - 0020 - 0025 - 0030 - 0040 0050 - 0060 - 0080	Max standard stroke 0040 (Ø16) 0050 (Ø20-25) 0080 (Ø32÷63) Max stroke with non-rotating guided piston rod (upon request) 0100 (Ø16) 0200 (Ø20-25) 0400 (Ø32-40) 0500 (Ø50-63)
		C = With flange for versions: 100-101-120-160-170 200-201-220-260-270 H = Hollow piston rod only for through piston rod versions without flange

For high temperature applications please contact our Sales Office

FIXING ELEMENTS AND ACCESSORIES

Ø	Flange for female piston rod	Rear male hinge	Rear female hinge with pin	Counter hinge 90°	Front/rear flange	Angle bracket	Intermediate hinge	Centering adaptor ring	Hinge support	DF sensor and DHF covering strip	Cable clamping for DF sensor
16											
20	RPF-28016	RPF-11016	-	-	RPF-12016	RPF-13016	-	-	-		
20	RPF-28020	RPF-11020	-	-	RPF-12020	RPF-13020	-	-	-		
25	RPF-28025	RPF-11025	-	-	RPF-12025	RPF-13025	-	-	-		
32	RPF-28032	-	KF-10032A	KF-19032	KF-12032	KF-13032	KDF-14032	RSF-09032	KF-41032		
40	RPF-28040	-	RPF-10040A	KF-19040	RPF-12040	RPF-13040	RPF-14040	RSF-09040	KF-41040050		
50	RPF-28050	-	RPF-10050A	KF-19050	RPF-12050	RPF-13050	RPF-14050	RSF-09050	KF-41040050		
63	RPF-28063	-	RPF-10063A	KF-19063	RPF-12063	RPF-13063	RPF-14063	RSF-09063	KF-41063080		
										DF	DHF-0020100
											DF-001

CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	die-cast aluminium
Barrel	anodized aluminium
Piston	aluminium
Guide slide	acetalic resin
Piston rod	chromium-plated steel, stainless steel upon request
Piston seal	NBR
Guide bush for piston rod	acetalic resin
Shock absorber seals	NBR
Cushionings	pneumatic adjustable (UNIVER Original standard supplied)
Magnet	standard supplied
Other available versions	tandem, two-position tandem, opposed tandem, with common piston rod (upon request)



CODIFICATION KEY

R	M	3	0	0	0	3	2	0	0	2	5	
1	2	3	4			5		6				

1 Series	2 Type	3 Version
RM = Ø 16÷100 mm - ISO 21287 Compact Cylinders	3 = Stainless steel male piston rod 4 = Chromium-plated steel male piston rod Upon request 1 = Stainless steel female piston rod (Ø40÷100) 2 = Chromium-plated steel female piston rod (Ø 40÷100)	00 = D.A. Standard version 01 = D.A. Through piston rod 20 = D.A. Long piston (Ø32÷63) 60 = S.A. Retracted piston rod 70 = S.A. Extended piston rod
		D.A. = Double acting S.A. = Single acting
4 Bore (mm)	5 Stroke (mm)	6 Option
016 = Ø16 050 = Ø50 020 = Ø20 063 = Ø63 025 = Ø25 080 = Ø80 032 = Ø32 100 = Ø100 040 = Ø40	Single acting 0005 - 0010 (Ø16÷25) 0005 - 0010 - 0015 - 0020 - 0025 (Ø32÷100) Double acting 0005 - 0010 - 0015 - 0020 - 0025 - 0030 - 0040 0050 - 0060 - 0080	Max standard stroke 0040 (Ø16) 0050 (Ø20-25) 0080 (Ø32÷63) H = Hollow piston rod only for through piston rod versions without flange

For high temperature applications please contact our Sales Office

FIXING ELEMENTS AND ACCESSORIES

Ø	Female fork with clips	Articulated self-lubricating fork	Fork with axially mounted articulated pin	Fork with angle mounted articulated pin	Floating joint	Centering adaptor ring	Female rear hinge with pin	Counter hinge 90° (CETOP)	Counter hinge 90°	Counter hinge 90° (CNOMO)	Narrow female hinge with pin
16											
20	MF-15012	MF-17012	MF-22016	MF-23012	MF-24012	-	-	-	-	-	-
25	MF-15020	MF-17020	MF-22020	MF-23020	MF-24020	-	-	-	-	-	-
32	KF-15032	KF-17032	KF-22025	KF-23025	KF-24032	RSF-09032	KF-10032A	KF-19032CTA	KF-19032	KF-19032CN	KF-10032AS
40	KF-15032	KF-17032	KF-22025	KF-23025	KF-24032	RSF-09040	KF-10040A	KF-19040CTA	KF-19040	KF-19040050CN	KF-10040AS
50	KF-15040	KF-17040	KF-22040	KF-23040	KF-24040	RSF-09050	KF-10050A	KF-19050CTA	KF-19050	KF-19040050CN	KF-10050AS
63	KF-15040	KF-17040	KF-22040	KF-23040	KF-24040	RSF-09063	KF-10063A	KF-19063CTA	KF-19063	KF-19063080CN	KF-10063AS
80	KF-15050	KF-17050	KF-22050	KF-23050	KF-24050	RSF-09080	KF-10080A	KF-19080CTA	KF-19080	KF-19063080CN	KF-10080AS
100	KF-15050	KF-17050	KF-22050	KF-23050	KF-24050	RSF-09100	KF-10100A	KF-19100CTA	KF-19100	KF-19100125CN	KF-10100AS
Ø	Articulated counter hinge	Articulated rear male hinge	Rear male hinge	Front/rear flange	Angle bracket	Front/rear hinge with floating pin	Hinge support	ISO intermediate hinge	DF sensor and DHF covering strip	Cable clamping for DF sensor	
16											
20	-	-	-	-	-	-	-	-			
25	-	-	-	-	-	-	-	-			
32	KF-190325C	KF-11032S	KF-11032	KF-12032	KF-13032	KF-14032AP	KF-41032	KDF-14032			
40	KF-19040SC	KF-11040S	KF-11040	KF-12040	KF-13040	KF-14040AP	KF-41040050	RPF-14040			
50	KF-19050SC	KF-11050S	KF-11050	KF-12050	KF-13050	KF-14050AP	KF-41040050	RPF-14050			
63	KF-19063SC	KF-11063S	KF-11063	KF-12063	KF-13063	KF-14063AP	KF-41063080	RPF-14063			
80	KF-19080SC	KF-11080S	KF-11080	KF-12080	KF-13080	KF-14080AP	KF-41063080	KDF-14080			
100	KF-19100SC	KF-11100S	KF-11100	KF-12100	KF-13100	KF-14100AP	KF-41100125	KDF-14100			

CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	die-cast zamak (Ø 16 ÷ 25 mm) die-cast aluminium (Ø 32 ÷ 63 mm)
Barrel	anodized aluminium
Piston	aluminium
Guide slide	acetalic resin
Piston rod	chromium-plated steel, stainless steel upon request
Piston seal	NBR
Guide bush for piston rod	acetalic resin
Shock absorber seals	NBR
Cushionings	pneumatic adjustable (UNIVER Original standard supplied)
Magnet	standard supplied
Other available versions	tandem, two-position tandem, opposed tandem, with common piston rod (upon request)



CODIFICATION KEY

R	O	2	0	0	0	3	2	0	0	2	5	
1	2	3	4			5			6			

1 Series	2 Type	3 Version
RO = Ø 16÷63 mm UNITOP Compact Cylinders octagonal tube	1 = Stainless steel female piston rod 2 = Chromium-plated steel female piston rod Male piston rod upon request	00 = D.A. Standard version 01 = D.A. Through piston rod 20 = D.A. Long piston (Ø32÷63)
		D.A. = Double acting
4 Bore (mm)	5 Stroke (mm)	6 Option
016 = Ø16 040 = Ø40 020 = Ø20 050 = Ø50 025 = Ø25 063 = Ø63 032 = Ø32	0005 - 0010 - 0015 - 0020 - 0025 - 0030 - 0040 0050 - 0060 - 0080 Max standard stroke 0040 (Ø16) 0050 (Ø20-25) 0080 (Ø32÷63)	H = Hollow piston rod only for through piston rod versions without flange

FIXING ELEMENTS AND ACCESSORIES

Ø	Rear male hinge	Rear female hinge with pin	Counter hinge 90°	Front/rear flange	Angle bracket	Intermediate hinge	Centering adaptor ring	Hinge support	DF sensor and DHF covering strip	Cable clamping for DF sensor
16										
20	RPF-11016	-	-	RPF-12016	RPF-13016	-	-	-		
25	RPF-11020	-	-	RPF-12020	RPF-13020	-	-	-		
32	RPF-11025	-	-	RPF-12025	RPF-13025	-	-	-		
40	-	KF-10032A	KF-19032	KF-12032	KF-13032	KDF-14032	RSF-09032	KF-41032		
50	-	RPF-10040A	KF-19040	RPF-12040	RPF-13040	RPF-14040	RSF-09040	KF-41040050		
63	-	RPF-10050A	KF-19050	RPF-12050	RPF-13050	RPF-14050	RSF-09050	KF-41040050		
	-	RPF-10063A	KF-19063	RPF-12063	RPF-13063	RPF-14063	RSF-09063	KF-41063080		
									DF	DF-001
									DHF-0020100	

CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	die-cast zamak (Ø16÷25) die-cast aluminium (Ø32÷63)
Barrel	anodized aluminium
Piston	aluminium
Guide slide	acetalic resin
Piston rod	chromium-plated steel, stainless steel upon request
Piston seal	NBR
Guide bush for piston rod	acetalic resin
Shock absorber seals	NBR
Cushionings	pneumatic adjustable (UNIVER Original standard supplied)
Magnet	standard supplied
Other available versions	tandem, two-position tandem, opposed tandem, with common piston rod (upon request)



CODIFICATION KEY

R	N	3	0	0	0	3	2	0	0	2	5	
1	2	3	4				5			6		

1 Series	2 Type	3 Version
RN = Ø 16÷63 mm - ISO 21287 Compact Cylinders octagonal tube	3 = Stainless steel male piston rod 4 = Chromium-plated steel male piston rod	00 = D.A. Standard version 01 = D.A. Through piston rod 20 = D.A. Long piston (Ø32÷63)
	Female piston rod upon request	D.A. = Double acting
4 Bore (mm)	5 Stroke (mm)	6 Option
016 = Ø16 040 = Ø40 020 = Ø20 050 = Ø50 025 = Ø25 063 = Ø63 032 = Ø32	0005 - 0010 - 0015 - 0020 - 0025 - 0030 - 0040 0050 - 0060 - 0080 Max standard stroke 0040 (Ø16) 0050 (Ø20-25) 0080 (Ø32÷63)	H = Hollow piston rod only for through piston rod versions without flange

FIXING ELEMENTS AND ACCESSORIES

Ø	Female fork with clips	Articulated self-lubricating fork	Fork with axially mounted articulated pin	Fork with angle mounted articulated pin	Floating joint	Centering adaptor ring	Rear female hinge with pin	Counter hinge 90° (CETOP)	Counter hinge 90°	Counter hinge 90° (CNOMO)	Narrow female hinge with pin
16											
20	MF-15012	MF-17012	MF-22016	MF-23012	MF-24012	-	-	-	-	-	-
25	MF-15020	MF-17020	MF-22020	MF-23020	MF-24020	-	-	-	-	-	-
32	MF-15020	MF-17020	MF-22020	MF-23020	MF-24020	-	-	-	-	-	-
40	KF-15032	KF-17032	KF-22025	KF-23025	KF-24032	RSF-09032	KF-10032A	KF-19032CTA	KF-19032	KF-19032CN	KF-10032AS
50	KF-15032	KF-17032	KF-22025	KF-23025	KF-24032	RSF-09040	KF-10040A	KF-19040CTA	KF-19040	KF-19040050CN	KF-10040AS
63	KF-15040	KF-17040	KF-22040	KF-23040	KF-24040	RSF-09050	KF-10050A	KF-19050CTA	KF-19050	KF-19040050CN	KF-10050AS

Ø	Articulated counter hinge	Articulated rear male hinge	Rear male hinge	Front/rear flange	Angle bracket	Front/rear hinge	Hinge support	ISO Intermediate hinge	DF sensor and DHF covering strip	Cable clamping for DF sensor
16										
20	-	-	-	-	-	-	-	-		
25	-	-	-	-	-	-	-	-		
32	KF-19032SC	KF-11032S	KF-11032	KF-12032	KF-13032	KF-14032AP	KF-41032	KDF-14032		
40	KF-19040SC	KF-11040S	KF-11040	KF-12040	KF-13040	KF-14040AP	KF-41040050	KDF-14040		
50	KF-19050SC	KF-11050S	KF-11050	KF-12050	KF-13050	KF-14050AP	KF-41040050	KDF-14050		
63	KF-19063SC	KF-11063S	KF-11063	KF-12063	KF-13063	KF-14063AP	KF-41063080	KDF-14063		

DF DHF-0020100 DF-001



Adjustable pneumatic cushioning

UNIVER Original since 1999

- No change in dimensions comparing to an equivalent cylinder without cushionings
- Standard supplied for all models

STRONG

Oversized guide and piston rods

ISO 15552

Interaxes, centering diameters and piston rods complying with ISO 15552 standards



RS

$\varnothing 32 \div 100$ mm



RQ

$\varnothing 32 \div 63$ mm




RS210

With anti-rotation guides $\varnothing 32 \div 100$ mm



Non-rotating version (octagonal tube)
Max load (Nm)



\varnothing	Nm
32	2
40	3
50	5
63	8



Assembly Kit
available for all series



CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	die-cast aluminium
Barrel	anodized aluminium
Piston	aluminium
Guide slide	acetalic resin
Piston rod	chromium-plated steel, stainless steel upon request
Piston seal	NBR
Guide bush for piston rod	acetalic resin
Shock absorber seals	NBR
Cushionings	pneumatic adjustable (UNIVER Original standard supplied)
Magnet	standard supplied
Other versions available	tandem, two-position tandem, opposed tandem, with common piston rod (upon request)


CODIFICATION KEY

R	S	2	0	0	0	3	2	0	0	2	5	
1	2	3	4			5			6			

1 Series	2 Type	3 Version
RS = Ø 32÷100 mm - STRONG Compact Cylinders		
	1 = Stainless steel female piston rod	For type 1 - 2
	2 = Chromium-plated steel female piston rod	00 = D.A. Standard version
	3 = Stainless steel male piston rod	01 = D.A. Through piston rod
	4 = Chromium-plated steel male piston rod	10 = D.A. Non-rotating guided piston rod (Ø32÷63)
		11 = D.A. Non-rotating guided through piston rod (Ø32÷63)
		20 = D.A. Long piston (Ø32÷63)
		60 = S.A. Retracted piston rod
		70 = S.A. Extended piston rod
		D.A. = Double acting S.A. = Single acting

4 Bore (mm)	5 Stroke (mm)	6 Option
032 = Ø32	Single acting	Max stroke with long piston (upon request)
040 = Ø40	0005 - 0010 - 0015 - 0020 - 0025	0800 (Ø32-40) 1000 (Ø50÷63)
050 = Ø50	Double acting	Max stroke with non-rotating guided piston rod (upon request)
063 = Ø63	0005 - 0010 - 0015 - 0020 - 0025	0400 (Ø32-40) 0800 (Ø63)
080 = Ø80	0030 - 0040 - 0050 - 0060 - 0080	0500 (Ø50)
100 = Ø100	Max standard stroke	
	0080 (Ø32÷100)	
		H = Hollow piston rod only for through piston rod versions without flange
		G = Preset for locking unit only for D.A. cylinders with chromium-plated steel piston rod
		C = With flange for versions: 100-101-120-160-170 200-201-220-260-270

For high temperature applications please contact our Sales Office

FIXING ELEMENTS AND ACCESSORIES

Ø	Female fork with clips	Articulated self-lubricating fork	Fork with axially mounted articulated pin	Fork with angle mounted articulated pin	Floating joint	Flange for female piston rod	Centering adaptor ring	Female rear hinge with pin	Counter hinge 90° (CETOP)	Counter hinge 90°	Counter hinge 90° (CNOMO)
32											
40	KF-15032	KF-17032	KF-22025	KF-23025	KF-24032	RPF-28032	RSF-09032	KF-10032A	KF-19032CTA	KF-19032	KF-19032CN
50	KF-15040	KF-17040	KF-22040	KF-23040	KF-24040	RPF-28040	RSF-09040	KF-10040A	KF-19040CTA	KF-19040	KF-19040050CN
63	KF-15050	KF-17050	KF-22050	KF-23050	KF-24050	RPF-28050	RSF-09050	KF-10050A	KF-19050CTA	KF-19050	KF-19040050CN
80	KF-15080	KF-17080	KF-22080	KF-23080	KF-24080	RPF-28083	RSF-09063	KF-10063A	KF-19063CTA	KF-19063	KF-19063080CN
100	KF-15080	KF-17080	KF-22080	KF-23080	KF-24080	-	RSF-09080	KF-10080A	KF-19080CTA	KF-19080	KF-19063080CN
							RSF-09100	KF-10100A	KF-19100CTA	KF-19100	KF-19100125CN
Ø	Narrow female hinge with pin	Articulated counter hinge	Articulated rear male hinge	Rear male hinge	Front/rear flange	Angle bracket	Front/rear hinge with floating pin	Hinge support	ISO Intermediate hinge	DF sensor and DHF covering strip	Cable clamping for DF sensor
32											
40	KF-10032AS	KF-19032SC	KF-11032S	KF-11032	KF-12032	KF-13032	KF-14032AP	KF-41032	KDF-14032		
50	KF-10040AS	KF-19040SC	KF-11040S	KF-11040	KF-12040	KF-13040	KF-14040AP	KF-41040050	RPF-14040		
63	KF-10050AS	KF-19050SC	KF-11050S	KF-11050	KF-12050	KF-13050	KF-14050AP	KF-41040050	RPF-14050		
80	KF-10063AS	KF-19063SC	KF-11063S	KF-11063	KF-12063	KF-13063	KF-14063AP	KF-41063080	RPF-14063		
100	KF-10080AS	KF-19080SC	KF-11080S	KF-11080	KF-12080	KF-13080	KF-14080AP	KF-41063080	RPF-14080		
	KF-10100AS	KF-19100SC	KF-11100S	KF-11100	KF-12100	KF-13100	KF-14100AP	KF-41100125	KDF-14100		
										DF DHF-0020100	DF-001

CHARACTERISTICS

Ambient temperature	-20 \div 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 \div 10 bar
End-caps	die-cast aluminium
Barrel	anodized aluminium
Piston	aluminium
Guide slide	acetalic resin
Piston rod	chromium-plated steel, stainless steel upon request
Piston seal	NBR
Guide bush for piston rod	acetalic resin
Shock absorber seals	NBR
Cushionings	pneumatic adjustable (UNIVER Original standard supplied)
Magnet	standard supplied
Other available versions	tandem, two-position tandem, opposed tandem, with common piston rod (upon request)



CODIFICATION KEY

R	Q	2	0	0	0	3	2	0	0	2	5	
1	2	3	4			5		6				

1 Series	2 Type	3 Version
RQ = $\varnothing 32 \div 63 \text{ mm - STRONG}$ Compact Cylinders octagonal tube	1 = Stainless steel female piston rod with flange 2 = Chromium-plated steel female piston rod with flange 3 = Stainless steel male piston rod 4 = Chromium-plated steel male piston rod	00 = D.A. Standard version 01 = D.A. Through piston rod 20 = D.A. Long piston
		D.A. = Double acting
4 Bore (mm)	5 Stroke (mm)	6 Option
032 = $\varnothing 32$ 040 = $\varnothing 40$ 050 = $\varnothing 50$ 063 = $\varnothing 63$	Double acting 0005 - 0010 - 0015 - 0020 - 0025 0030 - 0040 - 0050 - 0060 - 0080 Max standard stroke 0080 Max stroke with long piston (upon request) 0400 ($\varnothing 32\text{-}40$) 1000 ($\varnothing 50\text{-}63$)	H = Hollow piston rod only for through piston rod versions without flange G = Preset for locking unit only with chromium-plated steel piston rod

FIXING ELEMENTS AND ACCESSORIES

\varnothing	Female fork with clips	Articulated self-lubricating fork	Fork with axially mounted articulated pin	Fork with angle mounted articulated pin	Floating joint	Centering adaptor ring	Female rear hinge with pin	Counter hinge 90° (CETOP)	Counter hinge 90°	Counter hinge 90° (CNOMO)	Narrow female hinge with pin
32											
40	KF-15032	KF-17032	KF-22025	KF-23025	KF-24032	RSF-09032	KF-10032A	KF-19032CTA	KF-19032	KF-19032CN	KF-10032AS
50	KF-15040	KF-17040	KF-22040	KF-23040	KF-24040	RSF-09040	KF-10040A	KF-19040CTA	KF-19040	KF-19040050CN	KF-10040AS
63	KF-15050	KF-17050	KF-22050	KF-23050	KF-24050	RSF-09050	KF-10050A	KF-19050CTA	KF-19050	KF-19040050CN	KF-10050AS

\varnothing	Articulated counter hinge	Articulated rear male hinge	Rear male hinge	Front, rear flange	Angle bracket	Front / rear hinge	Hinge support	ISO Intermediate hinge	DF sensor and DHF covering strip	Cable clamping for DF sensor
32										
40	KF-19032SC	KF-11032S	KF-11032	KF-12032	KF-13032	KF-14032AP	KF-41032	KDF-14032		
50	KF-19040SC	KF-11040S	KF-11040	KF-12040	KF-13040	KF-14040AP	KF-41040050	RPF-14040	DF DHF-0020100	DF-001
63	KF-19050SC	KF-11050S	KF-11050	KF-12050	KF-13050	KF-14050AP	KF-41040050	RPF-14050		

COMPACT

Up to **40%** width reduction if compared to standard cylinders

ANTI-ROTATION

Piston rod max rotation from 0,3° to 0,9°


CUSHIONING

Standard supplied Ø18 ÷ 80 mm
(adjustable pneumatic cushionings)




OV

Ø18 ÷ 80 mm

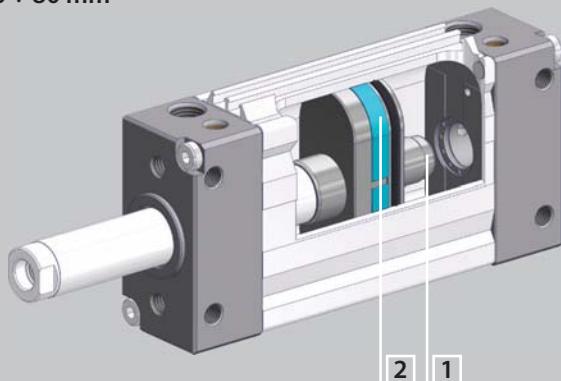

Max applicable torque (Nm) and related
Max rotation



Ø	F (Nm)	Degrees
18	0,80	0,90
25	1,00	0,80
32	1,40	0,60
40	1,70	0,40
50	2,00	0,35
63	2,30	0,30
80	2,60	0,30


1 Adjustable pneumatic cushioning

- Standard supplied
- No variation in dimensions comparing to an equivalent cylinder without cushionings

2 Oversized piston guide and UNIVER original seal

- Suitable for heavy loads (F)
- Piston rod rotation highly reduced

Comparison of A dimension: OV cylinder vs ISO standard cylinder



Ø	A (OV)	A (ISO)	Reduction
18	16	46,5	-42%
25	20	52	-35%
32	24,5	64,5	-45%
40	38	76,5	-30%
50	40	95	-40%
63	50	114	-35%
80	60	140	-38%

CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	anodized aluminium
Barrel	anodized aluminium
Piston	aluminium
Guide slide	technopolymer
Piston rod	stainless steel (Ø18-25), chromium-plated steel (Ø32-80)
Piston seal	NBR
Guide bush for piston rod	standard supplied
Piston rod scraper seals	polyurethane
Cushionings	pneumatic adjustable (standard supplied)
Magnet	standard supplied



CODIFICATION KEY

O	V	2	0	0	0	3	2	0	0	5	0
1	2	3	4	5							

1 Series

OV = Ø 18÷80 mm - Oval Cylinders



2 Type

- 1 = Stainless steel female piston rod (Ø18÷80)
- 2 = Chromium-plated steel female piston rod (Ø32÷80)
- 3 = Stainless steel male piston rod (Ø18÷80)
- 4 = Chromium-plated steel male piston rod (Ø32÷80)

3 Version

- 00 = D.A. Standard version
- 01 = D.A. Through piston rod
- 02 = D.A. Hollow through piston rod

D.A. = Double acting

4 Bore (mm)

018 = Ø18	050 = Ø50
025 = Ø25	063 = Ø63
032 = Ø32	080 = Ø80
040 = Ø40	

5 Stroke (mm)

0010 - 0025 - 0040 - 0050 - 0080 - 0100 - 0125 - 0160 - 0200 (Ø18-25)
0010 - 0025 - 0040 - 0050 - 0080 - 0100 - 0125 - 0160 - 0200 - 0250 - 0320 (Ø 32-80)

Theoretical forces (N) developed at working pressure (bar)

Ø	Working pressure					Working pressure					Cushioning length
	bar					bar					
	Thrust		Traction								
Ø	2	4	6	8	10	2	4	6	8	10	
18	54	108	162	216	270	41	82	122	163	204	8
25	98	196	295	393	491	82	165	247	330	412	10
32	161	322	483	643	804	138	276	415	553	691	10
40	251	502	754	1005	1256	221	422	633	844	1055	14
50	393	785	1178	1570	1963	330	660	990	1320	1650	Front 11/Back 14
63	623	1246	1870	2493	3116	560	1120	1682	2240	2800	Front 11/Back 14
80	1005	2010	3015	4019	5024	942	1884	2826	3770	4711	Front 20/Back 27

FIXING ELEMENTS AND ACCESSORIES

Ø	Female fork with clips	Articulated self-lubricating fork	Fork with axially mounted articulated pin	Fork with angle mounted articulated pin	Floating joint	Angle bracket	Male hinge	Flange	DF sensor and DHF covering strip	Cable clamping for DF sensor
18										
25	MF-15020	MF-17020	MF-22020	MF-23020	KF-24020	OVF-13018	OVF-11018	OVF-12018		
32	KF-15032	KF-17032	KF-22025	KF-23025	KF-24032	OVF-13025	OVF-11025	OVF-12025		
40	KF-15040	KF-17040	KF-22040	KF-23040	KF-24040	OVF-13040	OVF-11040	OVF-12040		
50	KF-15050	KF-17050	KF-22050	KF-23050	KF-24050	OVF-13050	OVF-11050	OVF-12050		
63	KF-15050	KF-17050	KF-22050	KF-23050	KF-24050	OVF-13063	OVF-11063	OVF-12063		
80	KF-15050	KF-17050	KF-22050	KF-23050	KF-24050	OVF-13080	OVF-11080	OVF-12080		
									DF DHF-0020100	DF-001

1

CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	aluminium
Barrel	aluminium
Piston	aluminium
Guide slide	technopolymer
Piston rod	stainless steel
Piston seal	NBR
Guide bush for piston rod	standard supplied
Piston rod scraper seal	polyurethane
Shock absorber seals	NBR (standard supplied)
Other versions available	tandem, two-position tandem, multiple position tandem



CODIFICATION KEY

W	1	0	0	0	3	2	0	0	5	0	
1	2	3			4		5		6	7	


1 Series	2 Type	3 Version	4 Bore (mm)	5 Stroke (mm)	6 Option	7 Magnetic
W = Ø 12÷100 mm Short Stroke Cylinders	1 = Stainless steel piston rod 7 = Stainless steel piston rod with male rear hinge, versions 00 - 10 - 60 - 70 (except for bore Ø12)	00 = D.A. Standard version 01 = D.A. Through piston rod 10 = D.A. Non-rotating piston rod (except for Ø 12) 11 = D.A. Non-rotating through piston rod (except for Ø 12) 31 = D.A. Hollow through piston rod (except for Ø 12-16) 60 = S.A. Retracted piston rod 70 = S.A. Extended piston rod	Ø12	040 = Ø40 050 = Ø50 063 = Ø63 080 = Ø80 100 = Ø100	S = Safety distance (only for versions 10 and 11)	M = Magnetic version (except for Ø 12)
012 = Ø12	040 = Ø40	Single acting 0005 - 0010 (Ø12÷25) 0005 - 0010 - 0025 (Ø32÷100)	016 = Ø16	050 = Ø50		
020 = Ø20	063 = Ø63	Double acting 0005 - 0010 - 0020 - 0025 0030 - 0040 - 0050 (Ø12-16) 0005 - 0010 - 0020 - 0025 0030 - 0040 - 0050 - 0075 (Ø20÷100)	025 = Ø25	080 = Ø80		
032 = Ø32	100 = Ø100		040	050		

D.A. = Double acting
S.A. = Single acting

FIXING ELEMENTS AND ACCESSORIES

Ø	Nipple	DF sensor and DHF covering strip	Cable clamping for DF sensor	DH sensor
12				
16	WF-50012			
20	WF-50020			
25	WF-50020			
32	WF-50032			
40	WF-50040			
50	WF-50050			
63	WF-50063			
80	WF-50080			
100	WF-50080	DF DHF-0020100	DF-001	DH

New tube



Traditional tube



1 Groove for DF series recessed sensor

2 Groove for DH series traditional sensor



Ø 12 mm




Ø 16-20 mm



Ø 25-32 mm



Ø 40 mm



Ø 50-63-80-100 mm

CHARACTERISTICS


Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	aluminium
Barrel	aluminium
Piston	die-cast aluminium
Guide slide	acetalic resin
Rack	stainless steel
Piston seal	NBR
Pinion	nitrided steel
Shock absorber seals	NBR
Cushionings	pneumatic adjustable (standard supplied)



CODIFICATION KEY

R	1	1	0	3	2	1	8	0	
1	2	3	4	5					

1 Series	2 Type	3 Bore (mm)	4 Angle of rotation	5 Magnetic
R = Ø 32÷125 mm Pneumatic rotary actuators	11 = Male pinion without adjustment (degree of accuracy ± 3°) 12 = Male pinion with adjustment ± 5° 13 = Female pinion without adjustment (degree of accuracy ± 3°) 14 = Female pinion with adjustment ± 5°	032 = Ø32 040 = Ø40 050 = Ø50 063 = Ø63 080 = Ø80 100 = Ø100 125 = Ø125	090 = 90° 180 = 180° 270 = 270° 360 = 360°	M = Magnetic version

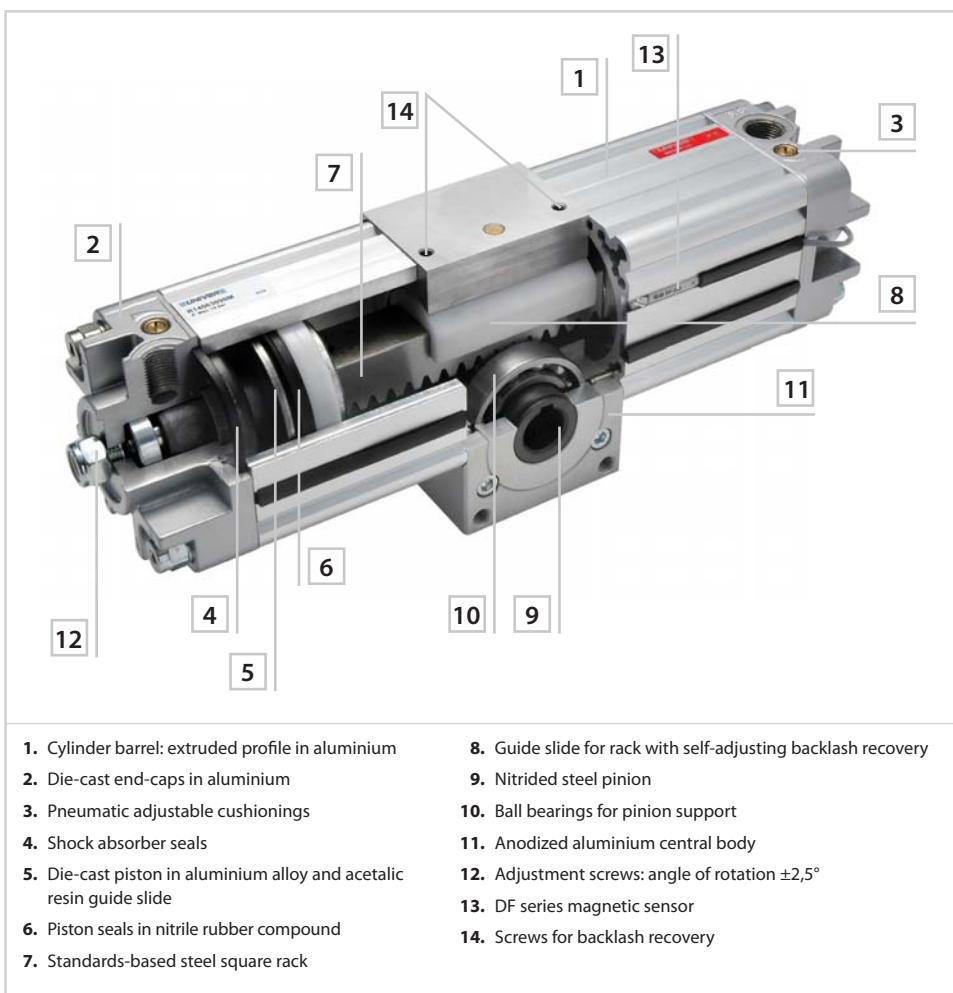

ACCESSORIES

∅	DF sensor and DHF covering strip	Cable clamping for DF sensor
32		
40		
50		
63	DF DHF-0020100	DF-001
80		
100		
125		

CHARACTERISTICS

Ambient temperature	-20° ÷ 80 °C
Fluid	filtered air, with or without lubrication, neutral gases
Working pressure	4 ÷ 8 bar (single acting) 2 ÷ 8 bar (double acting)
Connections	NAMUR interface (G1/4)
Rotation	0-90°±3° (external adjustment)
Max pressure	10 bar
End-caps	die-cast aluminium
Piston	die-cast aluminium
Guide slide	acetalic resin
Seals	NBR
Body	hard anodized aluminium extrusion
Pinion	nickel-plated steel
Screws and nuts	stainless steel

Connections: bottom hole for ball valve installation in compliance with ISO 5211/DIN 3337 standards.

Solenoid valve interface, shaft top-end and top hole for accessory fixing in compliance with

VDI/VDE 3845 NAMUR standards.


CODIFICATION KEY

Y	R	2	0	1	D	A	0
1		2		3			

1 Series	2 Size (mm)	3 Version
YR2 = Rotary Actuators for Process Automation	00 = 32 (DAO only)	DA0 = Double acting
	01 = 50	S12 = Single acting - 12 springs standard
	2A = 63 (F04)	(different number of springs upon request)
	2B = 63 (F05)	
	03 = 75	
	35 = 85	
	04 = 100	
	45 = 115	
	05 = 125	
	55 = 145	
	06 = 160	
	08 = 200	
	10 = 250	

Torque - double acting version (P = 6 bar)

Part No.	Torque (Nm)
YR200DA0	7,3
YR201DA0	17,7
YR22ADA0-YR22BDA0	28,2
YR203DA0	60
YR235DA0	102
YR204DA0	142
YR245DA0	261,6
YR205DA0	333
YR255DA0	473
YR206DA0	680
YR208DA0	1276
YR210DA0	3234

Torque - single acting version (P = 6 bar)

Part No.	Torque (Nm)
	0°
YR201S12	10,5
YR22AS12-YR22BS12	16,8
YR203S12	36
YR235S12	64
YR204S12	87
YR245S12	159,6
YR205S12	203
YR255S12	303
YR206S12	429
YR208S12	796
YR210S12	1909
	90°
	7,2
	11,4
	24
	39
	56
	101,6
	130
	173
	260
	520
	1254

■ YR series ball valve



■ AC-N series NAMUR valves



■ AC-N series valves with actuator



YR3



Ambient temperature: 0 ÷ 50 °C

Working pressure: 1,5 ÷ 7 bar

Rotation angle: 0° ÷ 180°

Version upon request: with shock absorbers Ø 15 ÷ 63
(add suffix D to part no. e.g. YR3010D)

Part. No	Ø	Torque (Nm)*	Kinetic energy (J)	Sensor
YR3003	10	0,3	0,002	
YR3007	12	0,6	0,006	
YR3010	15	1,5	0,006	
YR3020	18	2,2	0,025	
YR3030	20	3,2	0,048	
YR3050	25	5,5	0,080	
YR3070	28	7,5	0,24	
YR3100	32	9,8	0,32	
YR3200	40	19	0,56	
YR3300	50	31	1	
YR3500	63	45	1,5	

* = Theoretical torque at 5 bar

Examples of CYLINDER - VALVE assembly

- RV - STRONG cylinder with integrated VDMA valve**
STRONG cylinder with integrated 5/2-5/3 VDMA solenoid valve, side 18 or 26 mm.
Supply and exhaust occur directly from the connection plate between valve and cylinder and exhausts are adjustable.
Electrical connection M12 can be operated also from a PLC.



- KD series ISO 15552 cylinder with integrated valve**
Valve mounting by means of a proper plate embedded in one of tube sensor grooves.



- RW - Telescopic cylinder with integrated VDMA valve**
Telescopic cylinder with integrated 5/2-5/3 VDMA solenoid valve, side 18 or 26 mm.
Supply and exhaust occur directly from the connection plate between valve and cylinder and exhausts are adjustable.
Electrical connection M12 can be operated also from a PLC.



- RS series STRONG cylinder with integrated valve**
Valve mounting by means of a proper plate embedded in one of tube sensor grooves.




Plate for mounting valve on sensor groove




DF-003 (M3)
DF-004 (M4)

S1-S5-VL1

Rodless Cylinders

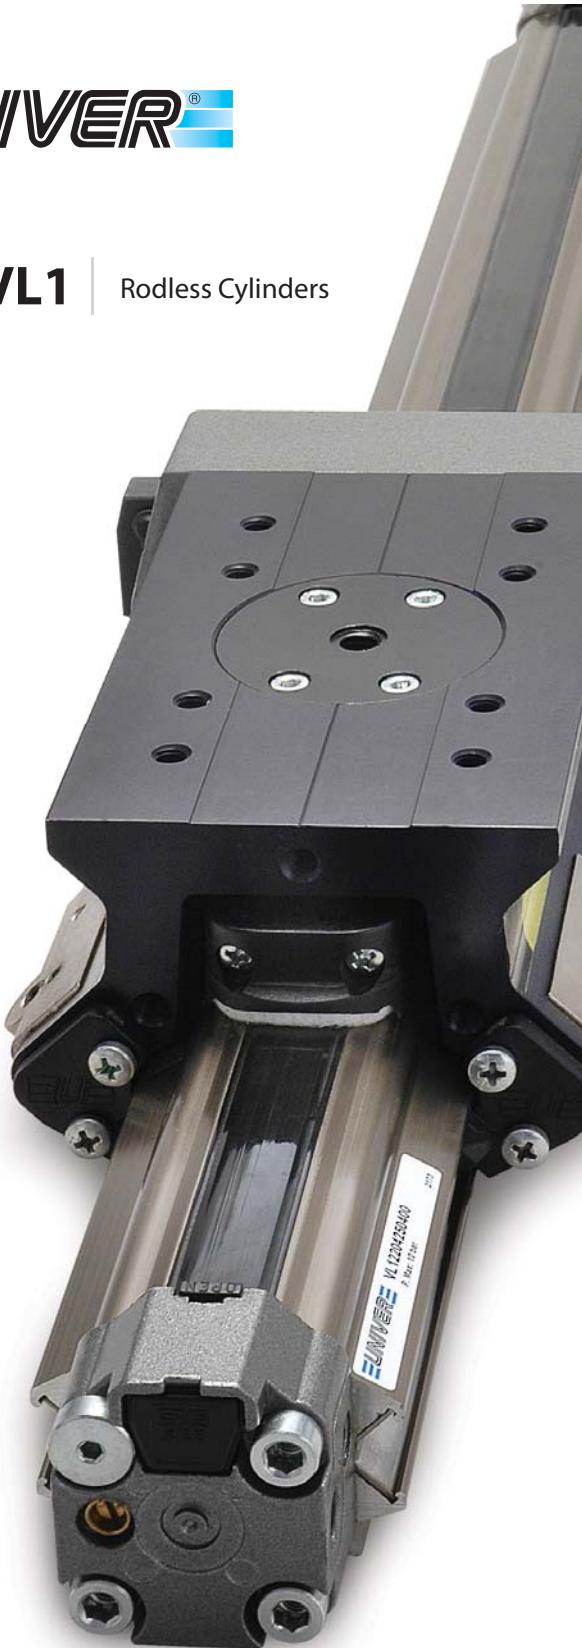

UNIVER Original since 1988



- A** - Internal strip (seal)
- B** - External strip (protection) made of reinforced elastomer with Kevlar fiber




S1

$\varnothing 16 \div 50$ mm - Standard version





S5

$\varnothing 25 \div 50$ mm - Version with integrated guides
Technopolymer sliding guide

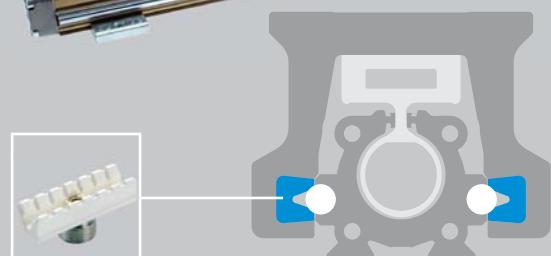

VL1

$\varnothing 25 \div 50$ mm - Version with 90° integrated guides
Sliding on ball bearings

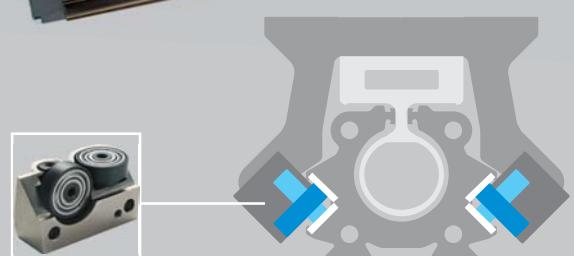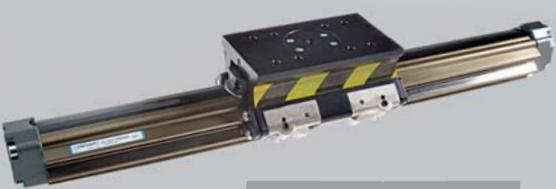

Assembly Kit
available for all series



CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	3 ÷ 10 bar
End-caps	die-cast light alloy
Barrel	anodized aluminium
Piston	aluminium
Guide slide	acetalic resin
Piston seal	NBR
Shock absorber seals	mechanical
Cushionings	pneumatic adjustable (standard supplied)
Magnet	upon request



CODIFICATION KEY

S	1	0	1	1	2	5	0	8	5	0	
1	2	3	4	5		6		7			

1 Series

S1 = Ø 16÷50 mm - Rodless Cylinders
standard version

2 Carriage type

- 0 = Standard carriage
- 2 = Medium carriage (except for Ø16)
- 3 = Long carriage (except for Ø16)

3 Left end-cap supply port

- 0 = No supply port (both chambers are supplied from the right end-cap)
- 1 = Side supply port (except for Ø16)
- 2 = Bottom supply port (except for Ø16)
- 3 = Rear supply port (except for Ø16)

4 Right end-cap supply port

- 1 = Side supply port (except for Ø16)
- 2 = Bottom supply port (except for Ø16)
- 3 = Rear supply port (except for Ø16)
- 4 = Rear supply ports for both chambers on the right end-cap
- 5 = Side supply ports for both chambers on the right end-cap (only for Ø16)

5 Bore (mm)


- 16 = Ø18
- 25 = Ø25
- 32 = Ø32
- 40 = Ø40
- 50 = Ø50

6 Stroke (mm)

- Up to 5000 (Ø 16)
- Up to 6000 (Ø 25÷50)

7 Magnetic

- M = Magnetic version standard supplied (Ø 16)
upon request (Ø 25÷50)


S1


- Extruded aluminium profile Ø 16 ÷ 50 mm
- Stroke up to 6 m
- Different supply port configurations available
- Different carriage types
- High translation speed 1 ÷ 3 m/s

FIXING ELEMENTS AND ACCESSORIES

Ø	Bracket	Angle bracket	Fixing plate	Oscillating bracket	Female threaded connection	Male threaded pin	Female connection without thread	DF sensor and DHF covering strip	Cable clamping for DF sensor	DH sensor	Bracket for DH sensor
16	SF-13016	-	SF-12016	SF-24016	SF-26016	SF-27016	SF-28016	DF	DF-001	-	-
25	-	SF-13025	SF-12025	SF-24025	SF-26025	SF-27025	SF-28025	-	-		DH-S25
32	-	SF-13032	SF-12032	SF-24032	SF-26032	SF-27032	SF-28032	-	-		DH-S32
40	SF-13040	-	SF-12040	SF-24032	SF-26032	SF-27032	SF-28032	-	-		DH-S40
50	SF-13050	-	SF-12050	-	-	-	-	-	-		DH-S50

1
CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	3 ÷ 10 bar
End-caps	die-cast light alloy
Barrel	anodized aluminium
Piston	aluminium
Guide slide	acetalic resin
Piston seal	NBR
Shock absorber seals	mechanical
Cushionings	pneumatic adjustable (standard supplied)


CODIFICATION KEY

S	5	0	1	1	2	5	0	8	5	0
1	2	3	4	5	6					

1 Series

S5 = \varnothing 25÷50 mm - Rodless Cylinders
with integrated guides
Technopolymer sliding guide

2 Carriage type

0 = Standard carriage (except \varnothing 40-50)
2 = Medium carriage
3 = Long carriage

3 Left end-cap supply port

0 = No supply port (both chambers are supplied
from the right end-cap)
1 = Side supply port
2 = Bottom supply port
3 = Rear supply port

4 Right end-cap supply port


1 = Side supply port
2 = Bottom supply port
3 = Rear supply port
4 = Rear supply ports for both chambers
on the right end-cap

5 Bore (mm)

25 = \varnothing 25
32 = \varnothing 32
40 = \varnothing 40
50 = \varnothing 50

6 Stroke (mm)

Up to **6000**


S5

- Extruded aluminium profile \varnothing 25 ÷ 50 mm
- Stroke up to 6 m
- Flexible guide system
- Sliding of the carriage with plastic slide on steel shafts
- Translation speed 0,2 ÷ 1,5 m/sec.
- Version with locking unit available


FIXING ELEMENTS

\varnothing	Bracket	Angle bracket	Fixing plate
25			
32	-	SF-13025	SF-12025
40	-	SF-13032	SF-12032
50	SF-13040	-	SF-12040
	SF-13050	-	SF-12050

S5 with L6 locking unit


CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	3 ÷ 10 bar
End-caps	die-cast light alloy
Barrel	anodized aluminium
Piston	aluminium
Guide slide	acetalic resin
Piston seals	NBR
Shock absorber seals	mechanical
Cushionings	pneumatic adjustable (standard supplied)

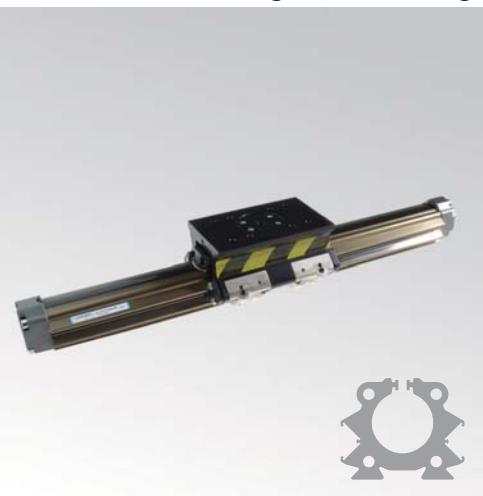

CODIFICATION KEY

V	L	1	2	2	1	1	3	2	0	8	5	0
1	2	3	4	5	6				7			

1 Series

VL1 = Ø 25÷50 mm - Rodless Cylinders with
90° integrated guides
Sliding on ball bearings

2 Carriage type

2 = Medium carriage
3 = Long carriage

3 No. of ball bearing pairs standard supplied

Medium carriage	Long carriage
2 = Ø 25÷40	3 = Ø 25÷40
3 = Ø 50	4 = Ø 50

4 Left end-cap supply port

- 0 = No supply port (both chambers are supplied from the right end-cap)
- 1 = Side supply port
- 2 = Bottom supply port
- 3 = Rear supply port

5 Right end-cap supply port


- 1 = Side supply port
- 2 = Bottom supply port
- 3 = Rear supply port
- 4 = Rear supply ports for both chambers on the right end-cap

6 Bore (mm)

- 25 = Ø25
- 32 = Ø32
- 40 = Ø40
- 50 = Ø50

7 Stroke (mm)

Up to **6000**

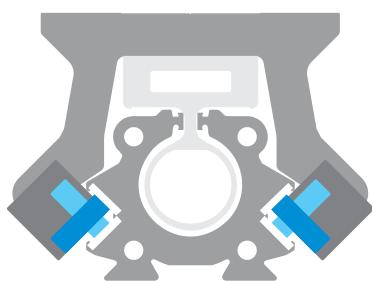

VL1

- Extruded aluminium profile Ø 25 ÷ 50 mm
- Stroke up to 6 m
- Heavy duty precision series
- Rigid guide system
- Sliding of the carriage on ball bearings
- Translation speed 0,2 ÷ 2 m/sec.
- Version with locking unit available

FIXING ELEMENTS

Ø	Bracket	Angle bracket	Fixing plate
25			
32	-	SF-13025	SF-12025
40	-	SF-13032	SF-12032
50	SF-13040	-	SF-12040
	SF-13050	-	SF-12050

VL1 with L6 locking unit



J | Slide Units**STRONG**

Extruded aluminium profile structure
UNIVER Original

STURDY

Oversized hollow guiding shafts
made of chromium-plated steel

SMOOTH SLIDING

Self-lubricating guiding bushes
made of special steel

STANDARD

Wide range of standard solutions
for any application requirement

**J1**

ISO 6432 Cylinders



ISO 15552 Cylinders

**J3**

Rodless Cylinders

**J64RS**

STRONG Cylinders

**J64RT2**

Telescopic Cylinders



Assembly Kit
available for all series



CHARACTERISTICS

Ambient temperature	-20 ÷ 80 °C
Fluid	filtered air, with or without lubrication
Working pressure	2 ÷ 10 bar
Barrel	extruded anodized aluminium
Guide bush for piston rod	special steel
Shafts	chromium-plated steel
Shaft scraper seals	polyurethane
Flange	steel



Slide Units for M, KE/K, KD series cylinders

J1



CODIFICATION KEY

J	1	0	A	5	5	0	0	5	0	A
1	2	3	4	5		6		7		

1 Series

J = Slide Unit

2 Type

- 10 = Protruding shafts and short housing (recommended for strokes up to 50 mm)
- 11 = Protruding shafts and medium housing
- 12 = Protruding shafts and long housing
- 14 = Fully protected cylinder
- 16 = Central mounting (semi-external cylinder)
- 17 = Central mounting (fully protected cylinder)
- 18 = Medium moving housing (external cylinder)
- 19 = Long moving housing (external cylinder)

3 Accessories

A = Shaft scrapers standard supplied

4 Slide unit size

- 0 = 16 for Ø16 cylinders
- 2 = 25 for Ø25 cylinders
- 3 = 32 for Ø32 cylinders
- 4 = 40 for Ø40 cylinders
- 5 = 50 for Ø50 cylinders
- 6 = 63 for Ø63 cylinders
- 7 = 80 for Ø80 cylinders
- 8 = 100 for Ø100 cylinders

5 Cylinder bore (mm)

- 0 = Ø16
 - 2 = Ø25
 - 3 = Ø32
 - 4 = Ø40
 - 5 = Ø50
 - 6 = Ø63
 - 7 = Ø80
 - 8 = Ø100
- M
0025 - 0030 - 0040 - 0050 - 0075
0100 - 0125 - 0150 - 0160 - 0175
0200 - 0250 - 0300 - 0400 - 0500
- KD - KE/K
0025 - 0050 - 0075 - 0080 - 0100
0125 - 0150 - 0160 - 0175 - 0200
0250 - 0300 - 0320 - 0400 - 0450
0500 - 0600 - 0700 - 0800 - 0900
1000

6 Cylinder stroke (mm)

7 Cylinder option

- A = M150 series Ø16÷25 microcyliners
K200 series Ø32÷100 cylinders
- B = M250 series Ø16÷25 microcyliners with locking unit
K200 series Ø32÷100 cylinders with locking unit
(only for J12, J14, J16, J17)
- C = KE200 series Ø 32÷100 cylinders
- D = KE200 series Ø 32÷100 cylinders with locking unit (only for J12, J14, J16, J17)
- E = KD200 series Ø32÷100 cylinders
- F = KD200 series Ø32÷100 cylinders with locking unit (only for J12, J14 and J16)

Slide units are supplied with integrated cylinder

Slide Units for S1 series rodless cylinders

J3



CODIFICATION KEY

J	3	0	A	5	3	0	1	0	0	A
1	2	3	4	5	6		7			

1 Series

J = Slide Unit

2 Type

30 = Fully protected cylinder (2 bearings - standard carriage)

31 = Fully protected cylinder (2 bearings - long carriage)

3 Accessories

A = Shaft scrapers standard supplied

4 Slide unit size

- 4** = 40 for Ø25 cylinders
- 5** = 50 for Ø32 cylinders
- 6** = 63 for Ø40 cylinders
- 7** = 80 for Ø50 cylinders

5 Cylinder bore (mm)

- 2** = Ø25
- 3** = Ø32
- 4** = Ø40
- 5** = Ø50

6 Slide unit stroke (mm)

Up to **0800**

7 Supply port option

A = Supply ports on both end-caps

B = Supply ports on the right end-cap only

Slide Units for RS series STRONG compact cylinders

J64RS



CODIFICATION KEY

J	6	4	R	S	3	3	0	0	5	0	B
1	2	3	4	5	6		7				

1 Series

J = Slide Unit - Shaft scrapers standard supplied

2 Slide unit type

- 64** = Fully protected cylinder (stroke longer than 50 mm)
- 65** = Fully protected cylinder, through opening
- 66** = Fully protected cylinder, through opening, two plates
- 67** = Fully protected cylinder, two plates (stroke longer than 50 mm)

3 Cylinder type

RS = STRONG cylinder (RS22J... series) with long piston and tube with sensor grooves on the same side as supply ports to allow mounting of magnetic sensors

4 Slide unit size

- 3** = 32 for Ø32 cylinders
- 4** = 40 for Ø40 cylinders
- 5** = 50 for Ø50 cylinders
- 6** = 63 for Ø63 cylinders

5 Cylinder bore (mm)

- 3** = Ø32
- 4** = Ø40
- 5** = Ø50
- 6** = Ø63

6 Slide unit stroke (mm)

0015 ÷ 0800

7 Cylinder option

A = Cylinder with long piston

B = Cylinder with long piston and locking unit

Slide units are supplied with integrated cylinder

Slide Units for RT2 series telescopic cylinders

■ J64RT2



CODIFICATION KEY

J	6	4	R	T	2	4	4	0	8	0	0	A
1	2	3	4	5	6	7						

1 Series

J = Slide Unit - Shaft scrapers
standard supplied

2 Slide unit type

64 = Fully protected telescopic cylinder

3 Cylinder type

RT2 = 2 stage telescopic cylinders

4 Slide unit size

3 = Ø32 for Ø32 cylinders
4 = Ø40 for Ø40 cylinders
5 = Ø50 for Ø50 cylinders
6 = Ø63 for Ø63 cylinders

5 Cylinder bore (mm)

3 = Ø32
4 = Ø40
5 = Ø50
6 = Ø63

6 Slide unit stroke (mm)

Standard stroke
0120 - 0160 - 0180 - 0200 - 0300 - 0400 - 0500
0600 - 0700 - 0800 - 0900 - 1000 - 1100 - 1200

7 Cylinder option

A = 2 stage telescopic cylinders

Min - Max stroke
0160 ÷ 0400 (Ø32)
0160 ÷ 0600 (Ø40)
0120 ÷ 0900 (Ø50)
0120 ÷ 1200 (Ø63)

Slide Units for RP series compact cylinders

■ J65



CODIFICATION KEY

J	6	5	R	P	2	2	0	0	5	0	A
1	2	3	4	5	6	7					

1 Series

J = Slide Unit - Shaft scrapers
standard supplied

2 Slide unit type

65 = Fully protected cylinder, through opening

3 Cylinder type

RP = UNITOP Ø25 mm compact cylinder

4 Slide unit size

2 = 25 for Ø25 cylinders

5 Cylinder bore (mm)

2 = Ø25

6 Slide unit stroke (mm)

0050 ÷ 0200

7 Cylinder option

A = Cylinder with long piston

Slide units are supplied with integrated cylinder

CHARACTERISTICS

Ambient temperature	-5 ÷ +60 °C
Fluid	filtered air, with or without lubrication
Working pressure	1 ÷ 10 bar
Body	aluminium alloy
Shafts	chromium-plated steel (JLS)
Piston	hardened and chromium-plated steel (JLV)
Piston rod	chromium-plated stainless steel AISI 303 (Ø12-16-20) chromium-plated steel C45 (Ø25-32-40-50-63)
Guide bearing	bearings (JLS) ball bushing (JLV)
Piston seal	NBR
Cushion seals	NBR
Magnet	standard supplied
Flange	steel


CODIFICATION KEY

J	L	S	0	1	2	0	0	3	0
1	2	3			4				

1 Series

JL = Guided Compact Cylinders

2 Guide bearing


 S = Bearings
 V = Ball bushing

3 Bore (mm)

012 = Ø12	032 = Ø32
016 = Ø16	040 = Ø40
020 = Ø20	050 = Ø50
025 = Ø25	063 = Ø63

4 Stroke (mm)

0010 = 10	0075 = 75	0250 = 250
0020 = 20	0100 = 100	0300 = 300
0025 = 25	0125 = 125	0350 = 350
0030 = 30	0150 = 150	0400 = 400
0040 = 40	0175 = 175	
0050 = 50	0200 = 200	




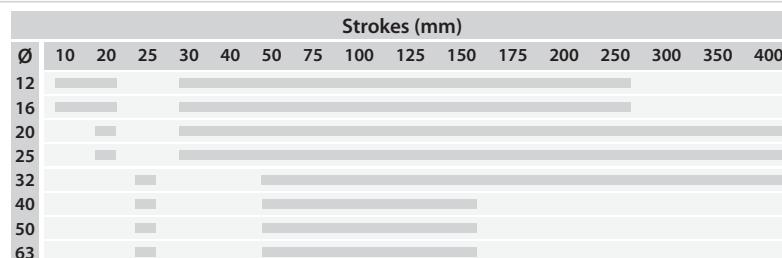

Fixing schemes

Top fixing

Bottom fixing

Rear fixing


T-slot fixing


DF-R magnetic sensor

 ELECTROMECHANICAL
 DF-R200L02
 DF-R200M08

 ELECTRONIC (PNP)
 DF-R700L02
 DF-R700M08

Mounting scheme


Upon request

Version with metallic piston rod scraper



Ø 6 ÷ 32 mm - Twin Rod Guided Cylinder

JT



Ambient temperature: -5 ÷ 60 °C

Stroke adjustment: 0 ÷ 5 mm

Part No.	Ø	Working pressure (bar)	Theoretical thrust force (N)*		Standard stroke (mm)	Max stroke (mm)	Sensor
			Thrust	Traction			
JTS006 JTV006	6	1,5 - 7	28	15,5	10-20-30	50	DF-R200
JTS012 JTV012	12	1 - 7	113	84	10-15-20-25-30 35-40-45-50-60-70	70	
JTS016 JTV016	16	1 - 7	200	150		120	
JTS020 JTV020	20	0,5 - 7	314	236	10-15-20-25 30-35-40-45	130	
JTS025 JTV025	25	0,5 - 7	490	378	50-60-70-75 80-90-100	150	
JTS032 JTV032	32	0,5 - 7	802	603		150	

S = Bearings

V = Ball bushing

* = Theoretical thrust force at 5 bar

Ø 6 ÷ 20 mm - Pneumatic Mini Slide Unit

JX1



Part No.	Ø	Working pressure (bar)	Theoretical thrust force (N)*		Standard stroke (mm)	Sensor
			Thrust	Traction		
JX1006	6	1,2 - 7	14,2	10,6	5-10-15-20-25 30-40-50-60	DF-R200
JX1010	10	0,6 - 7	39,3	33		
JX1016	16	0,6 - 7	101	86		
JX1020	20	0,5 - 7	157	132		

* = Theoretical thrust force at 5 bar

Ambient temperature: -5 ÷ 60 °C

Embody linear guide

Ø 6 ÷ 25 mm - Slide Table Actuator

JX2



Part No.	Ø	Working pressure (bar)	Theoretical thrust force (N)*		Standard stroke (mm)	Sensor
			Thrust	Traction		
JX2006	6	1,5 ÷ 7	25	20	10-20-30-40-50	DF-T200
JX2008	8		51	38	10-20-30-40-50-75	
JX2012	12		113	85	10-20-30-40-50-75-100	
JX2016	16		201	151	10-20-30-40-50-75-100-125	
JX2020	20		314	236	10-20-30-40-50-75-100-125-150	
JX2025	25		491	380	10-20-30-40-50-75-100-125-150	

* = Theoretical thrust force at 5 bar

Ambient temperature: 0 ÷ 60 °C

Versions upon request:

with stroke adjusting screw (add suffix R to part no. e.g. JX2008R)

with hydraulic shock absorbers Ø 8 ÷ 25 (add suffix D to part no. e.g. JX2008D)

Self-compensating

■ YDA



Part No.	Thread	Stroke (mm)	Max energy per cycle (Nm))	Max energy per hour (Nm)	Max effective mass (Kg)	Max impact speed (m/s)	Stop collar
YDA0806	M8 x 1	6	3	7000	6	0,3-2,5	YDG08
YDA1007	M10 x 1	7	6	12400	12	0,3-3,5	YDG10
YDA1210	M12 x 1	10	12	22500	22	0,3-4	YDG12
YDA1412	M14 x 1,5	12	20	33000	40	0,3-5	YDG14
YDA2015	M20 x 1,5	15	59	38000	120	0,3-5	YDG20
YDA2525	M25 x 1,5	25	80	60000	180	0,3-5	YDG25
YDA2725	M27 x 1,5	25	147	72000	270	0,3-5	YDG27

Special strokes upon request

Ambient temperature: -10 ÷ 80 °C

Body: steel

Piston rod: chromium-plated carbon steel

Piston: carbon steel

Adjustable

■ YDR



Part No.	Thread	Stroke (mm)	Max energy per cycle (Nm)	Max energy per hour (Nm)	Max effective mass (Kg)	Max impact speed (m/s)	Stop collars
YDR1415	M14 x 1,5	15	22	26400	80	3	YDG14
YDR2025	M20 x 1,5	25	39	30000	312	3,5	YDG20
YDR2525	M25 x 1,5	25	85	54000	400	3,5	YDG25
YDR2540	M25 x 1,5	40	40	80000	700	3,5	YDG25L
YDR3625	M36 x 1,5	25	25	81000	1400	3,5	YDG36
YDR3650	M36 x 1,5	50	50	100000	1400	3,5	YDG36

Special strokes upon request

Ambient temperature: -10 ÷ 80 °C

Body: steel

Piston rod: chromium-plated carbon steel

Piston: carbon steel

ISO 6432

■ M

Ø 8 ÷ 25 mm Microcylinders



ISO 15552

■ KL

Ø 32 ÷ 125 mm Pneumatic Cylinders



K/KE/KD

Ø 32 ÷ 125 mm Pneumatic Cylinders



■ K Ø 160-200

Ø 160 - 200 mm Pneumatic Cylinders



ISO 21287

■ RP-RM

Ø 16 ÷ 100 mm Compact Cylinders



■ RO-RN

Ø 16 ÷ 63 mm Compact Cylinders



■ RS

Ø 32 ÷ 100 mm STRONG Cylinders



■ RQ

Ø 32 ÷ 63 mm STRONG Cylinders



Rodless cylinders

S1

\varnothing 16 ÷ 50 mm Rodless Cylinders
standard version

**S5**

\varnothing 25 ÷ 50 mm Rodless Cylinders with integrated guides
technopolymer sliding guide

**VL1**

\varnothing 25 ÷ 50 mm Rodless Cylinders with integrated guides 90°
sliding on ball bearings



2

High-Tech



Locking Units

L1-N
L63
4

Telescopic Cylinders

RT

6




Pneumatic Actuators

NTZ
NQZ
NFZ8
8
9

Pneumatic Grippers

YMA
YMP10/11
10/11

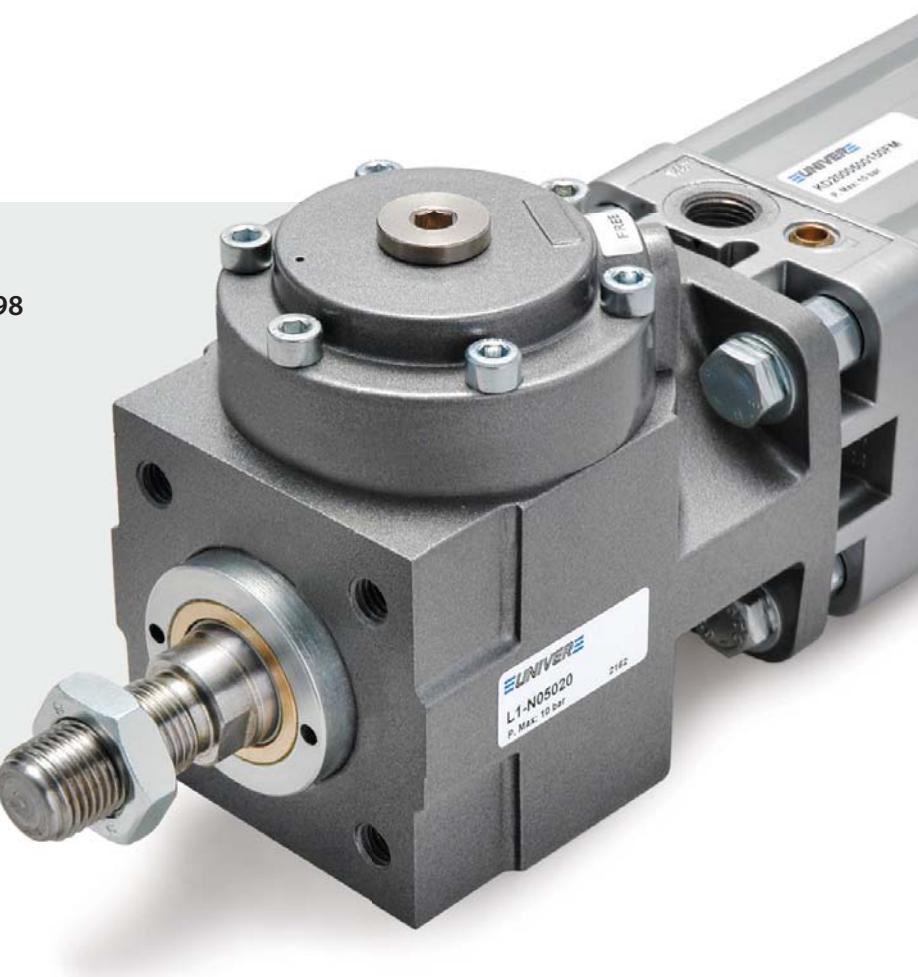**ORIGINAL**

Locking system UNIVER Original since 1998

STATIC/DYNAMIC

Static locking and dynamic braking in a single device

POWERFUL

The highest locking force among market equivalent devices



SAFE

No rod slipping even if affected by oil and grease

L1-N

For cylinders Ø 16 ÷ 125 mm

For piston rods Ø 6 ÷ 32 mm

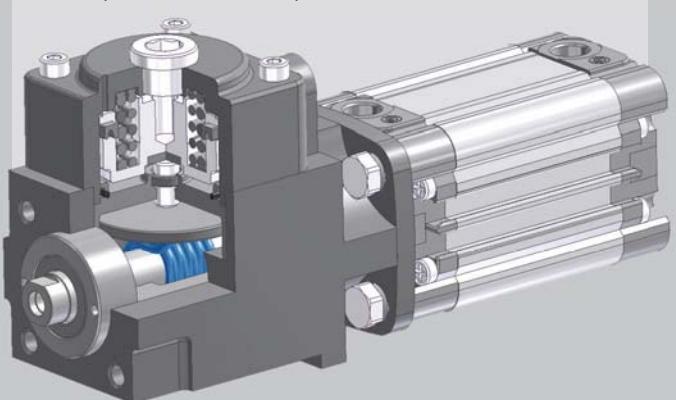M**KL
KE/K
KD****RS****Working principle**

CHARACTERISTICS

Ambient temperature	-20 ÷ 30 °C
Fluid	filtered air, with or without lubrication
Working pressure	4 ÷ 10 bar
Body	die-cast aluminium
Cover	die-cast aluminium
Piston	aluminium
Seals	NBR
Springs	special steel

M, KL, KE/K, KD, RS series cylinders


CODIFICATION KEY

L	1	-	N	0	6	3	2	0	
1			2		3		4		

1 Series	2 Cylinder bore (mm)	3 Piston rod bore (mm)	4 Option
L1-N = Locking unit for cylinders and piston rods	016 = Ø16 050 = Ø50 020 = Ø20 063 = Ø63 025 = Ø25 080 = Ø80 032 = Ø32 100 = Ø100 040 = Ø40 125 = Ø125	06 = Ø6 16 = Ø16 08 = Ø8 20 = Ø20 10 = Ø10 25 = Ø25 12 = Ø12 32 = Ø32	K = Metallic piston rod scraper upon request

Core features and performance

Ø	Ø rod (mm)	Static locking force	Pressure on the equivalent cylinder	Dynamic braking force	Response time at 6 bar	Stopping point repeatability	Vibration resistance	Shock resistance	Minimum release pressure
									bar
16	6	200	10	40% of the static locking force	12	< 1 mm at 1 m/s 10 g (10-55 Hz) for 30 minutes on each axis	10 g (10-55 Hz) for 30 minutes on each axis	2	4
20	8	314			12			3	
25	10	490			15			4	
32	12	800			20			5	
40	16	1260			20			8	
50	20	2000			25			11	
63	20	3100			25			15	
80	25	5000			30			21	
100	25	7850			30			29	
125	32	12300			40			40	

NFZ 160/200

ISO 15552 cylinders with integrated locking unit


Locking unit with optical positional device


CHARACTERISTICS

Ambient temperature	-20 ÷ +80 °C
Fluid	filtered air, with or without lubrication
Working pressure	4,5÷10 bar
Body	die-cast aluminium
Seals	NBR
Internal parts	brass/aluminium

UNIVER Locking Units for rodless cylinders perform the function of keeping the carriage in any intended point of its stroke and allow high locking accuracy.

They can be mounted on both sides of the carriage and the mechanical braking force can be further increased by means of an additional pneumatic override.


CODIFICATION KEY


L	6	-	S	5	0	3	2
1			2				

1 Series


L6-S5 = Locking Units for S5 series rodless cylinder
L6-V1 = Locking Units for VL1 series rodless cylinder

2 Cylinder bore (mm)

025 = Ø25
032 = Ø32
040 = Ø40
050 = Ø50

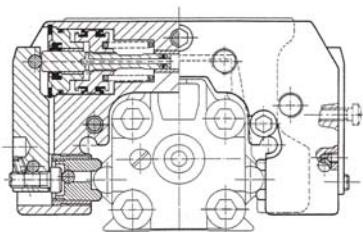S5 series with locking unit


- Min. release pressure: 4,5 bar
- Able to keep the carriage in position in both directions
- Easy to be mounted on both sides of the carriage
- Permanent manual release by means of 2 screws M5
- Locking performed by mechanical springs in absence of air
- Preset for additional pneumatic override to increase locking force

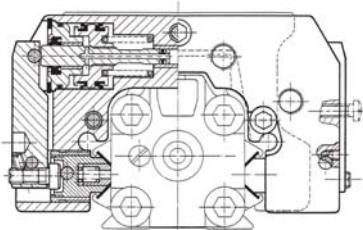VL1 series with locking unit


RT Telescopic Cylinders

ORIGINAL

UNIVER Original design and technology

INDUSTRIALIZED

Industrialized components and advanced technology


REDUCED DIMENSIONS

60% less than standard cylinders



NON-ROTATING

Non-rotation octagonal tube standard supplied

Octagonal



Octagonal

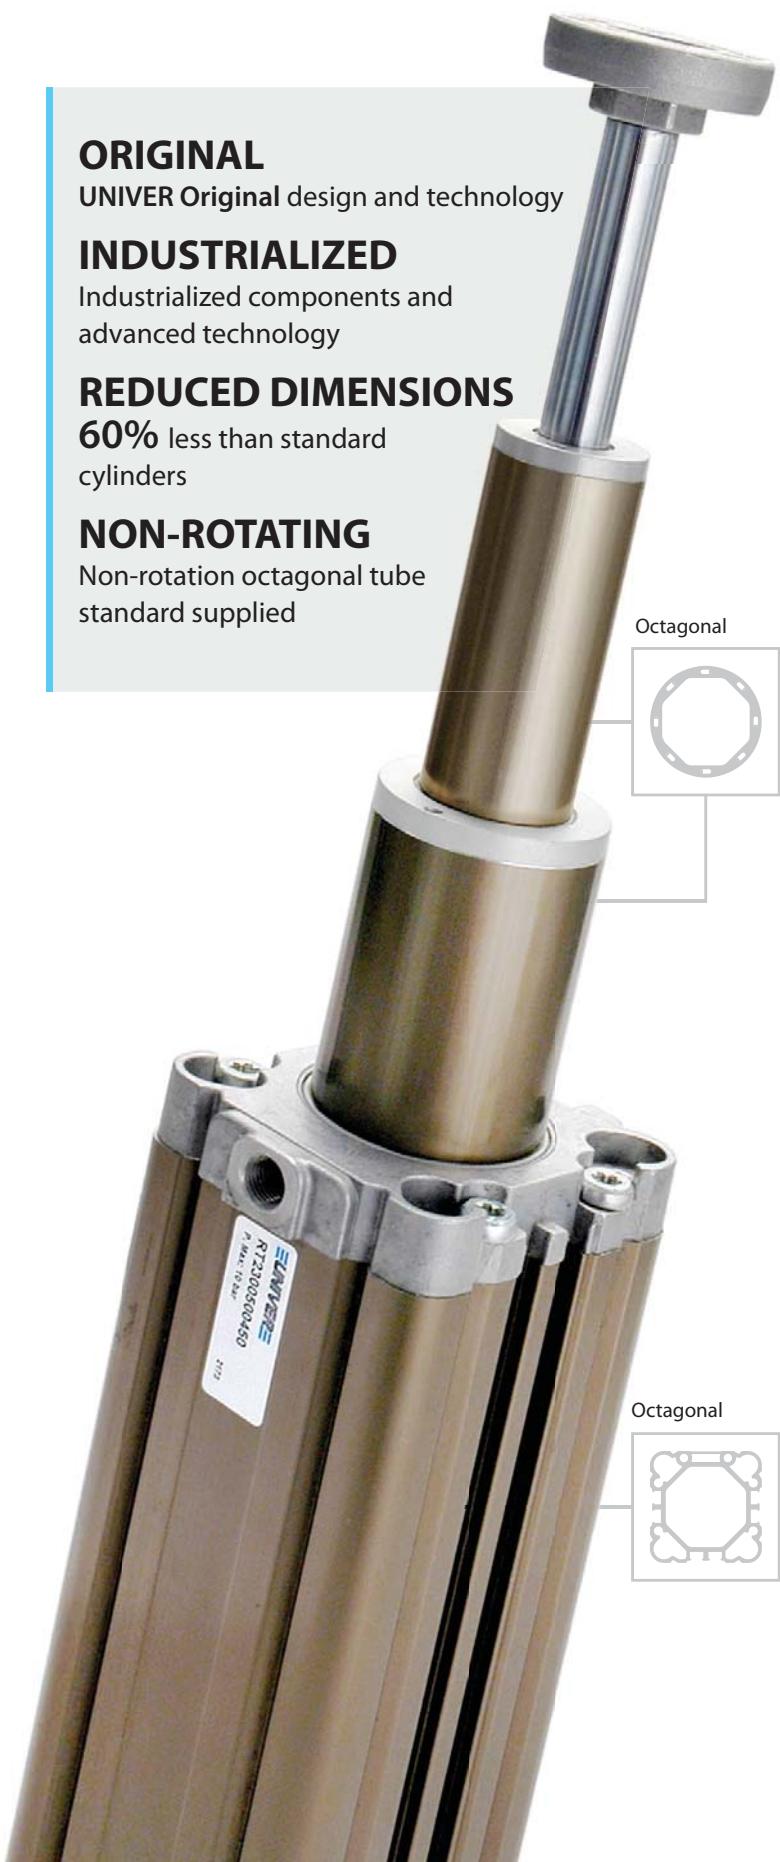

RT2

2 stages Ø 25 ÷ 63 mm




RT3

3 stages Ø 40 ÷ 63 mm



Comparison of overall dimensions
stroke 300 mm (A)

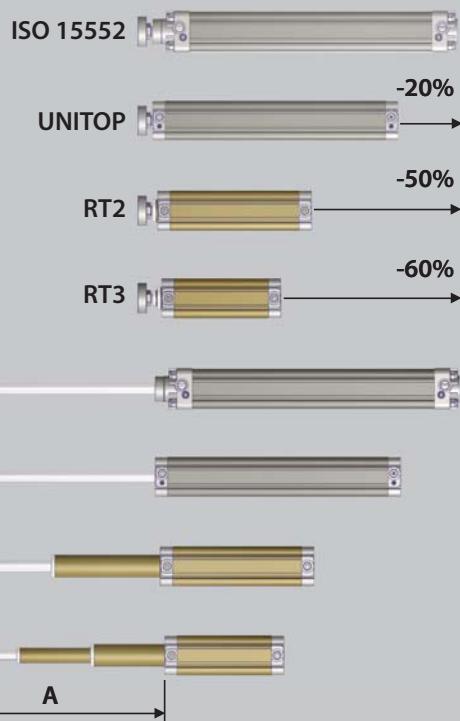

CHARACTERISTICS

Ambient temperature	-20 ÷ +80 °C
Fluid	filtered air, with or without lubrication
Working pressure	1,5 ÷ 10 bar
End-caps	die-cast aluminium
Barrel	internally/externally anodized aluminium
Piston	aluminium
Guide slide	acetalic resin
Piston rod	non-rotating, chromium-plated steel, with flange (female piston rod) stainless steel upon request
Piston seals	NBR
Guide bush for piston rod	acetalic resin
Shock absorber seals	NBR
Magnet	standard supplied (stage 1)

Telescopic cylinders work under optimal conditions when the load is in axial position, i.e. when the cylinder is placed vertically, working either upward or downward. They can obviously work also horizontally and cantilevered, but in this case it is needed to:

- Reduce the maximum stroke by 50% compared to nominal maximum strokes
- Request cylinders with slide units
- Support the radial load by means of other devices such as carriages, slides or sliding guides



CODIFICATION KEY

R	T	2	2	0	0	3	2	0	6	0	0	
1	2	3	4	5			6		7			

1 Series	2 Rod	3 Stages	4 Type
RT = Ø 25÷63 mm - 2/3 Stage Telescopic Pneumatic Cylinders (with non-rotating piston rod and elastic shock absorber seals)	1 = Stainless steel piston rod 2 = Chromium-plated steel piston rod	2 = 2 stages 3 = 3 stages	0 = D.A. Female piston rod 3 = D.A. Male piston rod D.A. = Double acting

5 Bore (mm)	6 Stroke (mm)	7 Option
2 stages 025 = Ø25 032 = Ø32 040 = Ø40 050 = Ø50 063 = Ø63	3 stages 040 = Ø40 050 = Ø50 063 = Ø63	1 = Without flange (only for female piston rod) L = Freely rotating piston rod (without flange) M = With telescopic magnetic shaft (stage 2-3) except for Ø 25, only for female piston rod
	0100 - 0120 - 0160 - 0180 - 0200 - 0300 - 0400 0500 - 0600 - 0700 - 0800 - 0900 - 1000 - 1100 - 1200 Max stroke: 0300 (Ø25) 0900 (Ø50) 0400 (Ø32) 1200 (Ø63) 0600 (Ø40)	
	3 stages 0150 - 0180 - 0210 - 0240 - 0270 - 0300 - 0360 - 0450 0600 - 0750 - 0900 - 999 - 1101 - 1200 Max stroke: 1200 (Ø40) 1500 (Ø50) 1800 (Ø63)	

Nominal tolerance on stroke (**mm**) and maximum applicable torque (**Nm**) for non-rotating piston rod

Ø	Tolerances		Applicable torque	
	mm		Nm	
	2 stages	3 stages	2 stages	3 stages
25	+2/0	+4/0	0,5	-
32	+3,2/0	+4/0	0,8	-
40	+3,2/0	+4/0	1	0,5
50	+3,2/0	+4/0	2	0,8
63	+3,2/0	+4/0	3	1

Theoretical forces at 6 bar (**N**)
(2 stages)

Ø	Available surface		Working pressure	
	mm ²		bar	
	thrust	traction	thrust	traction
25	201	111	123	65
32	314	201	192	123
40	490	377	300	231
50	804	603	492	369
63	1256	1055	769	649

Theoretical forces at 6 bar (**N**)
(3 stages)

Ø	Available surface		Working pressure	
	mm ²		bar	
	thrust	traction	thrust	traction
40	201	111	123	65
50	314	201	192	123
63	490	377	300	231

FIXING ELEMENTS AND ACCESSORIES

Ø	Female hinge with pin	Counter hinge 90° (CETOP)	Male articulated hinge	Rear male hinge	Front / rear flange	Angle bracket	DF sensor and DHF covering strip	Cable clamping for DF sensor
25	-	-	-	RPF-11025	RTF-12025	RTF-13025		
32	KF-10032A	KF-19032	KF-11032S	KF-11032	KF-12032	KF-13032		
40	KF-10040A	KF-19040	KF-11040S	KF-11040	KF-12040	KF-13040		
50	KF-10050A	KF-19050	KF-11050S	KF-11050	RTF-12050	RTF-13050		
63	KF-10063A	KF-19063	KF-11063S	KF-11063	RTF-12063	RTF-13063		
							DF DHF-0020100	DF-001

NTZ-NQZ-NFZ

Programmable Pneumatic
Actuators



NTZ

Pneumatic actuator with integrated digital measuring detector and safety locking device
 $\varnothing 32 \div 63 \text{ mm}$




NQZ

Pneumatic actuator with digital measuring system
 $\varnothing 32 \div 63 \text{ mm}$



NFZ

Pneumatic actuator with integrated safety locking device
 $\varnothing 32 \div 63 \text{ mm}$

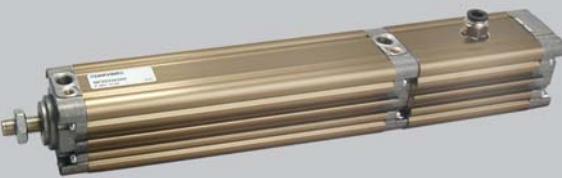

Pneumatic actuator with integrated digital measuring system and safety locking device

2

■ NTZ



The system does not need to be connected to the moving part of the mechanism, as movement is generated by an internal piston with bidirectional pneumatic function. Such piston, operated by a 5-way valve, moves autonomously until it meets the obstacle, thus measuring the stopping position. Position detection is obtained by the transformation of the translation movement of the piston rod into the rotary movement of the screw, by means of screw-female screw coupling. Then the encoder turns the rotation into a sequence of electrical impulses.

The piston and the encoder body need to be fixed, i.e. must not move regardless of screw rotation. This is the reason why the cylinder has been designed with octagonal piston and properly modified non-rotating piston rod.

The speed of the impact against the obstacle is limited by proper calibrated reducers which are embodied in the actuator, while the translation speed can be suitably controlled by means of a standard flow regulator.

For the indicated repeatability of reading to be guaranteed, the translation speed needs to be kept as constant as possible.

Main application fields are: mechanisation, palletization and automation of operating machines.

Max speed: 1 m/s

Repeatability accuracy: ± 0,3 mm

CODIFICATION KEY

N	T	Z	0	3	2	0	3	5	0
1			2			3			

1 Series

NTZ = Ø 32÷63 mm - Pneumatic actuator with integrated digital measuring system and safety locking device

2 Bore (mm)

032 = Ø32
040 = Ø40
050 = Ø50
063 = Ø63

3 Max stroke (mm)

0350 (Ø32)
0450 (Ø40)
0600 (Ø50)
0750 (Ø63)

Pneumatic actuator with digital measuring system

■ NQZ



Pneumatic actuators with digital measuring system are particularly suitable for:

- Detection of stopping position
- Anti-collision control in critical sequencing cycles
- Level control in palletization / de-palletization of piled objects
- Identification, classification and dimensional selection of objects (tolerances and rejects)
- Certification stations of machined pieces or tool breaking on machines for chip removal

The device can be used as both digital measuring detector and pneumatic actuator with digital measuring system

Max speed: 0,2 m/sec (detector) 0,8 m/sec (actuator)

Repeatability accuracy: ± 0,02 mm

CODIFICATION KEY

N	Q	Z	0	3	2	0	3	5	0
1			2			3			

1 Series

NQZ = Ø 32÷63 mm - Pneumatic actuator with integrated digital measuring system

2 Bore (mm)

032 = Ø32
040 = Ø40
050 = Ø50
063 = Ø63

3 Max stroke (mm)

0350 (Ø32)
0450 (Ø40)
0600 (Ø50)
0750 (Ø63)

Pneumatic actuator with integrated safety locking device

NFZ



Locking device embodied in the cylinder rear part in axial position.
High repeatability and intervention speed (16 ms).

Recommended application:

Emergency braking intervention at the speed allowed by the cylinder; for repeated functioning, as locking unit or braking intervention $\leq 50 \text{ mm/s}$.

Piston rod holding force (without axial backlash): ≥ 3 times the thrust of a cylinder supplied at 6 bar.

Locking force independent from ambient conditions or piston rod maintenance.

Locking device passive functioning, in absence of signal and/or air supply.

Minimum pressure: ≥ 3 bar

CODIFICATION KEY

N	F	Z	0	3	2	0	3	5	0
1			2			3			

1 Series	2 Bore (mm)	3 Max stroke (mm)
NFZ = Ø 32÷63 mm - Pneumatic actuator with integrated safety locking device	032 = Ø32 040 = Ø40 050 = Ø50 063 = Ø63	0350 (Ø32) 0450 (Ø40) 0600 (Ø50) 0750 (Ø63)

Angular Pneumatic Gripper

2

■ YMA10



Part No.	\emptyset	Gripping force (Nm)*		Max arm length L (mm)	Sensor
		Opening	Closing		
YMA10-12	12	0,25	0,2	30	DF-R 200
YMA10-16	16	0,6	0,45	40	
YMA10-20	20	1,15	0,85	60	
YMA10-25	25	2,25	1,7	70	
YMA10-32	32	4,05	3,05	85	

* = Gripping force at 5 bar

L = Gripping point 30 mm

Working pressure: 1,5 ÷ 7 bar

Ambient temperature: -5 ÷ 60 °C

Max frequency (cycles/min): 180

Opening angle: +30° -10°

Parallel Pneumatic Gripper

■ YMP10



Part No.	\emptyset	Gripping force (N)*		Max arm length L (mm)	Stroke open/close (mm)	Sensor
		Opening	Closing			
YMP10-12	12	8	5	30	6	DF-R 200
YMP10-16	16	24	17	40	8	
YMP10-20	20	46	33	60	12	
YMP10-25	25	73	57	70	14	
YMP10-32	32	98	81	85	16	

* = Gripping force at 5 bar

L = Gripping point 30 mm

Working pressure: 1,5 ÷ 7 bar

Ambient temperature: -5 ÷ 60 °C

Max frequency (cycles/min): 180

180° Angular Pneumatic Gripper

■ YMA20



Part No.	\emptyset	Gripping force (N)*	Max arm length L (mm)	Sensor
YMA20-10	10	6	60	DF-T 200
YMA20-16	16	20	70	
YMA20-20	20	36	80	
YMA20-25	25	78	90	

* = Gripping force at 5 bar

L = Gripping point 30 mm

Working pressure: 1 ÷ 6 bar

Ambient temperature: -10 ÷ 60 °C

Max frequency (cycles/min): 60

Repeatability: ± 0,2

Opening angle: +180°~182° / -3°

Parallel Pneumatic Gripper with Linear Guide

■ YMP20



Part No.	\emptyset	Pressure (bar)	Max frequency (cycles/min)	Repeatability (mm)	Gripping force (N)*		Stroke open/close (mm)	Sensor
					Opening	Closing		
YMP20-10	10	2 ÷ 7	180	0,01	11	16	4	DF-T 200
YMP20-16	16	1 ÷ 7	180	0,01	32	44	6	
YMP20-20	20	1 ÷ 7	180	0,01	42	65	10	
YMP20-25	25	1 ÷ 7	180	0,01	67	110	14	
YMP20-32	32	1 ÷ 7	60	0,02	160	228	22	
YMP20-40	40	1 ÷ 7	60	0,02	260	318	30	

* = Gripping force at 5 bar, gripping point 30 mm

Ambient temperature: -10 ÷ 60 °C

Low Profile Parallel Pneumatic Gripper with Linear Guide

■ YMP30



Part No.	\emptyset	Max frequency (cycles/min)	Gripping force (N)*		Stroke (mm)	Sensor
			Opening	Closing		
YMP30008	8	180	19	19	8-16-32	DF-T200
YMP30012	12		48	48	12-24-48	
YMP30016	16		91	91	16-32-64	
YMP30020	20		138	138	20-40-80	

* = Gripping force at 5 bar, gripping point 30 mm (for version 15 mm YMP30008)

Working pressure: 1,5 ÷ 7 bar

Ambient temperature: -5 ÷ 60 °C

Wide-type Parallel Pneumatic Gripper

■ YMP40



Part No.	\emptyset	Max frequency (cycles/min)	Gripping force (N)*		Stroke (mm)	Sensor
			Opening	Closing		
YMP40010	10	40	14	14	20-40-60	DF-...
YMP40016	16		44	44	30-60-80	
YMP40020	20		77	77	40-80-100	
YMP40025	25		128	128	50-100-120	
YMP40032	32		227	227	70-120-160	

* = Gripping force at 5 bar, gripping point 30 mm

Ambient temperature: -10 ÷ 60 °C

Repeatability: ±0,1

Self-centering 3 Jaw Pneumatic Gripper

■ YMP50



Part No.	\emptyset	Pressure (Bar)	Max frequency cycles/min	Gripping force (N)*		Stroke (mm)	Sensor
				Opening	Closing		
YMP50-16	16	2 - 6	120	14	16	4	DF-...
YMP50-25	25	2 - 6	120	41	46	6	
YMP50-32	32	1 - 6	60	73	81	8	
YMP50-40	40	1 - 6	60	117	127	8	
YMP50-50	50	1 - 6	60	180	204	12	
YMP50-63	63	1 - 6	60	332	359	16	
YMP50-80	80	1 - 6	30	495	520	20	
YMP50-100	100	1 - 6	30	745	775	24	
YMP50-125	125	1 - 6	30	1265	1310	32	

* = Gripping force at 5 bar, gripping point 20 mm (\emptyset 16-25) 30 mm (\emptyset 32÷63) 50 mm (\emptyset 80÷125)

Ambient temperature: -10 ÷ 60 °C

Repeatability: ±0,01

3

Valves



	Electropilots	B11 B10 B12 B A AA AB	3 4 5 7 8 9 10
	Standards-based Valves	BE/BE12 AE BD AC-N	12 15 17 22
	Spool Valves	CL/CM E F G6/GL6 G7 PS	23 30 33 34/37 41 43
	Poppet Valves	AC CH AF/AG AI AI-JET AI-JET2 AM	48 50 52/54 56 57 59 60
	COMPACT Valves	P10 P15 P15E	62 71 80
	Serial Connections	TC	84
	Accessories	COILS OPERATORS	86 88
	Complementary Valves	YR AP/AM HZ9N YF YG-6300	90 92 94 95 96

Standard
B11

1 w

15 NL/min


Low consumption
B10

0,3 w

15 NL/min


High flow rate
B12

0,6 w

30 NL/min



Special version

40 NL/min

Magnetic memory
LATCHING

Energizing through short impulse,
de-energizing through the same
impulse with inverted polarity.



B11 / B10 / B12

ISO 15218 Nanovalves


NEW


 Sub-base with
integrated electrical
connection

 Manual override
(standard)

 ISO 15218
interface

 No manual override
(upon request)


LED

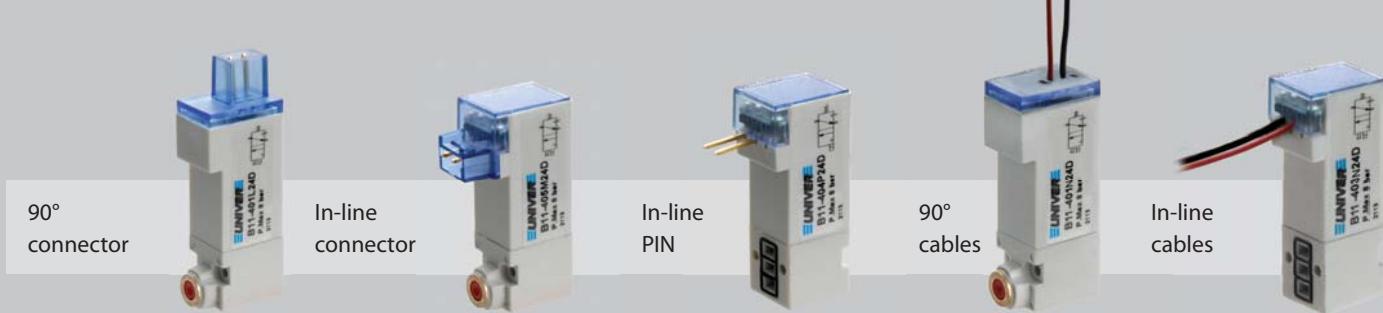

CHARACTERISTICS

Ambient temperature	-5 ÷ +50 °C
Fluid	10 µm filtered air, with or without lubrication
Max pressure	9 bar
Operating frequency	5 Hz
Fixing	2 screws M1,6
Connections	ISO 15218 interface
Nominal bore (mm)	0,8 (3/2 NC) 1,3 (3/2 NO)
Nominal flow rate (NL/min)	15
Valve body	self-extinguishing technopolymer
Seals	VITON/NBR
Voltage	24 V DC (12V DC upon request)
Power consumption	1 W
Electrical connection	D-535U40 (IP65), solder pin (IP00), Molex
Led	yellow (standard)
Manual override	monostable button



CODIFICATION KEY

B	1	1	-	4	0	1	L	2	4	D
1				2	3	4	5		6	

1 Series

B11 = ISO 15218 - 10 mm Nanovalves - 1 W standard

2 Model

4 = Monostable

3 Type

0 = 3/2 NC Ø 0,8 mm (1 W)
1 = 3/2 NO Ø 1,3 mm (1 W)

4 Function

- 1 = Manual override, in-line PIN
- 2 = No manual override, in-line PIN
- 3 = Manual override, PIN on interface side
- 4 = No manual override, PIN on interface side
- 5 = Manual override, PIN opposed to the interface
- 6 = No manual override, PIN opposed to the interface

5 Variant

- L = 90° Connector (protected PIN)
- M = In-line connector (protected PIN, Molex connection)
- P = In-line PIN (suitable for mounting on circuit boards)


6 Voltage

24D = 24 V DC
12D = 12 V DC (upon request)

Fixing screws standard supplied. Max tightening torque 0,15 Nm
Other versions upon request: in-line cables and 90° cables



Connector	Pin
■ 90° Connector	■ In-line connector NEW
B11-401L24D 	B11-405M24D
B11-411L24D 	B11-415M24D
	■ In-line PIN
	B11-403P24D
	B11-413P24D

D-535U40300/500



Single connector with wire
D-535U40300 = wire length 300 mm
D-535U40500 = wire length 500 mm

D-530-30/50/200



Miniature connector with loose cables
D-530-30 = wire length 300 mm
D-530-50 = wire length 500 mm
D-530-200 = wire length 2000 mm

CHARACTERISTICS

Ambient temperature	-5 ÷ +50 °C
Fluid	10 µm filtered air, with or without lubrication
Max pressure	7 bar
Operating frequency	5 Hz
Assembly	2 screws M1,6
Connections	ISO 15218 interface
Nominal bore (mm)	0,8
Nominal flow rate (NL/min)	15
Valve body	self-extinguishing technopolymer
Seals	VITON/NBR
Voltage	24 V DC (12V DC upon request)
Power consumption	0,3 W (speed-up 1 W)
Electrical connection	D-535U40 (IP65), solder pin (IP00), Molex
Led	yellow (standard)
Manual override	monostable button


CODIFICATION KEY

B	1	0	-	4	0	1	L	2	4	D
1				2	3	4	5		6	

1 Series

B10 = ISO 15218 - 10 mm Nanovalves - low power consumption

2 Model

4 = Monostable

3 Type

0 = 3/2 NC Ø 0,8 mm (0,3 W)

4 Function

- 1 = Manual override, in-line PIN
- 2 = No manual override , in-line PIN
- 3 = Manual override, PIN on interface side
- 4 = No manual override, PIN on interface side
- 5 = Manual override, PIN opposed to the interface
- 6 = No manual override, PIN opposed to the interface

5 Variant

- L = 90° Connector (protected PIN)
- M = In-line connector (protected PIN, Molex connection)
- P = In-line PIN (suitable for mounting on circuit boards)


6 Voltage

- 24D = 24 V DC
- 12D = 12 V DC (upon request)


Fixing screws standard supplied. Max tightening torque 0,15 Nm
Other versions upon request: in-line cables and 90° cables, nominal flow rate 40 NL/min
Connector
PIN

■ 90° Connector	■ In-line connector NEW	■ In-line PIN	■ Latching in-line PIN (with magnetic memory)
B10-401L24D	B10-405M24D	B10-403P24D	This version is energized by an electrical impulse and de-energized by a similar impulse with inverted polarity.


For further information please contact our Sales Office

D-535U40300/500
D-530-30/50/200


Single connector with wire
D-535U40300 = wire length 300 mm
D-535U40500 = wire length 500 mm



Miniature connector with loose cables
D-530-30 = wire length 300 mm
D-530-50 = wire length 500 mm
D-530-200 = wire length 2000 mm



CHARACTERISTICS

Ambient temperature	-5 ÷ +50 °C
Fluid	10 µm filtered air, with or without lubrication
Max pressure	7 bar
Operating frequency	5 Hz
Fixing	2 screws M1,6
Connections	ISO 15218 interface
Nominal bore (mm)	1,3
Nominal flow rate (NL/min)	30
Valve body	self-extinguishing technopolymer
Seals	VITON/NBR
Voltage	24 V DC (12 V DC upon request)
Power consumption	0,6 W (speed-up 1 W)
Electrical connection	D-535U40 (IP65), solder pin (IP00), Molex
Led	yellow (standard)
Manual override	monostable button


CODIFICATION KEY

B	1	2	-	4	0	1	L	2	4	D
1				2	3	4	5		6	

1 Series

B12 = ISO 15218 - 10 mm Nanovalves - high flow rate

2 Model

4 = Monostable

3 Type

0 = 3/2 NC Ø 1,3 mm (0,6 W)

4 Function

- 1 = Manual override, in-line PIN
- 2 = No manual override, in-line PIN
- 3 = Manual override, PIN on interface side
- 4 = No manual override, PIN on interface side
- 5 = Manual override, PIN opposed to the interface
- 6 = No manual override, PIN opposed to the interface

5 Variant

- L = 90° connector (protected PIN)
- M = In-line connector (protected PIN, Molex connection)
- P = In-line PIN (suitable for mounting on circuit boards)

6 Voltage

- 24D = 24 V DC
- 12D = 12 V DC (upon request)

Fixing screws standard supplied. Max tightening torque 0,15 Nm
Other versions (upon request): In-line cables and 90° cables, nominal flow rate 40 NL/min
Connector
PIN

■ 90° Connector	■ In-line connector NEW	■ In-line PIN
B12-401L24D	B12-405M24D	B12-403P24D

D-535U40300/500
D-530-30/50/200

Single connector with wire D-535U40300 = wire length 300 mm D-535U40500 = wire length 500 mm	Miniature connector with loose cables D-530-30 = wire length 300 mm D-530-50 = wire length 500 mm D-530-200 = wire length 2000 mm

Single connector with wire
D-535U40300 = wire length 300 mm
D-535U40500 = wire length 500 mm

Miniature connector with loose cables
D-530-30 = wire length 300 mm
D-530-50 = wire length 500 mm
D-530-200 = wire length 2000 mm

B 10 mm

1,2 W
12 NL/min



NEW
0,5 w


A 15 mm

2 w
38 NL/min



DETENT SYSTEM UNIVER Original since 1988

B 10 mm

3/2 NC - NO



Revolving coil
180° x 180°



Manual
override



Athmosphere
exhaust



Conveyed
exhaust

A 15 mm

2/2 NC - NO, 3/2 NC - NO



Revolving coil
90° x 90°



Manual
override



ISO 15218
interface



90° connector



In-line connector



Loose cables



Faston



90° connector



In-line connector






Loose cables

CHARACTERISTICS



Ambient temperature	-5 ÷ +50 °C	
Fluid	10 µm filtered air, with or without lubrication	
Commutation system	poppet	
Max pressure	8 bar	
Fixing	2 screws M1,6	
Connections	on sub-base	
Nominal bore (mm)	0,5	0,6
Nominal flow rate (NL/min)	9	12
Max frequency	2300 ÷ 3000 cycles/min	
Valve body	technopolymer (aluminium external cover)	
Seals	NBR	
Power consumption	1,2 W (1,35 W with LED) - 0,5 W (speed-up 1,2 W)	
Electrical connection	Molex bipolar connector or loose cables	
Voltage	12 V DC - 24 V DC	
Manual override	recessed button - 1 position	



Valves with conveyed exhaust



Valves with atmosphere exhaust



Revolving coil 180°x180°

Coils




DE-352 24 V DC 1,2 W
DE-452 24 V DC 1,35 W

DE-355 24 V DC 0,5 W
NEW




DE-552 24 V DC 1,2 W
DE-652 24 V DC 1,35 W

DE-555 24 V DC 0,5 W
NEW



DE-052L030 24 V DC 1,2 W



DE-642I 12 V DC 1,35 W

DE-652I 24 V DC 1,35 W

DE-655I 24 V DC 0,5 W
NEW

Coil with 90° upward connector
12 V DC upon request

Coil with integrated in-line connector
12 V DC upon request

Coil with loose cables
12 V DC upon request

Coil with in-line connector with protection
for a complete tightness


D-500

D-530-30/50/200


D-535-30/50/200



Miniature connector
without wires



Miniature connector with loose cables
D-530-30 = wire length 300 mm
D-530-50 = wire length 500 mm
D-530-200 = wire length 2000 mm



Miniature connector with cables
D-535-30 = wire length 300 mm
D-535-50 = wire length 500 mm
D-535-200 = wire length 2000 mm



NEW

0,5 W

**Low power
consumption**

Solenoid valves are supplied without coil and connector

CHARACTERISTICS

Ambient temperature	-5 ÷ +50 °C
Fluid	10 µm filtered air, with or without lubrication
Commutation system	poppet
Max pressure	9 bar
Fixing	nr. 2 screws M3
Connections	ISO 15218 interface
Nominal bore (mm)	1,2 1,5
Nominal flow rate (NL/min)	26 38
Max frequency	2700 cycles/min
Valve body	technopolymer (aluminium external cover)
Seals	NBR
Power consumption	2 W DC / 2,3 VA AC (Ø 1,2) - 2,5 W DC / 3,5 VA AC (Ø 1,5)
Electrical connection	15 mm connector - Molex bipolar connector or loose cables
Voltage	24 V DC -12 V DC - 24 V AC - 110 V AC - 230 V AC
Manual override	recessed button - 1 position (other manual overrides upon request)
Protection degree with connector	IP65



15 mm Microvalves

■ NC



Ø Voltage

A-141N	1,2	2 W DC
A-142N	1,5	2,5 W DC
A-151N	1,2	V DC/AC 2W/2 VA
A-101N	1,2	2 W DC
A-102N	1,5	2,5 W DC
A-111N	1,2	V DC/AC 2W/2 VA
A-112N	1,5	V DC/AC 2,5W/3,5 VA

■ NO




Ø Voltage

A-161N	1,2	2 W DC
A-162N	1,5	2,5 W DC
A-171N	1,2	V DC/AC 2W/2 VA
A-121N	1,2	2 W DC
A-122N	1,5	2,5 W DC
A-131N	1,2	V DC/AC 2W/2 VA


Revolving coil 90°x90°

Coils



DD-011	24 V AC - 50/60 Hz - 3,5 VA
DD-013	230 V AC - 50/60 Hz - 3,5 VA
DD-040	24 V AC - 50/60 Hz - 2,3 VA
DD-041	12 V DC - 2 W
DD-042	12 V DC 2,5 W

DD-050	48 V AC - 50/60 Hz - 2,3 VA
DD-051	24 V DC - 2 W
DD-052	24 V DC - 2,5 W
DD-060	110 V AC - 50/60 Hz - 2,3 VA
DD-070	230 V AC - 50/60 Hz - 2,3 VA



DD-051L030	24V DC - 2 W
DD-052L030	24V DC - 2,5 W

24 V DC Faston connector
12 V DC upon request24 V DC Coil with loose cables
12 V DC upon request

Sub-base for external electrical connection




A - 326A - _ _ G1/8 (standard)
A - 326B - _ _ M5 (upon request)
A - 326D - _ _ tube 4 (upon request)

_ _ = Number of positions


Sub-base for integrated electrical connection

For further information please
contact our Sales Office**A-299-11**


Sealing plate

A-301


Blank end-plate

A-305

Single base


A-350

Inverter plate

A-34546277/3
(EN50022) DIN
rail adaptor

Manual override

1 = Recessed button - 1 position (standard supplied)
2 = Impulse screw - 1-2 positions (upon request)
3 = Front button - 1 position (upon request)
4 = Key button - 1 position (upon request)

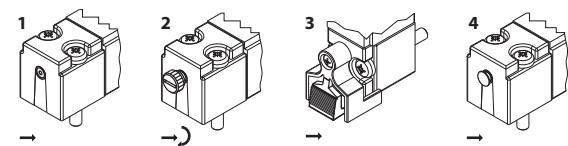

Solenoid valves are supplied without coil and connector

CHARACTERISTICS

Ambient temperature	-10 ÷ +50 °C			
Fluid	50 µm filtered air, with or without lubrication; neutral gases (versions for different fluids available upon request)			
Commutation system	direct intervention poppet with cushioned seals			
Pressure	0 ÷ 10 bar (2/2, 3/2 NC), 3 ÷ 10 bar (3/2 NO)			
Connections	on sub-base / threaded on the body			
Nominal bore (mm)	sub-base	G 1/8	M5	CNOMO
Nominal flow rate (NL/min)	1,2 ÷ 1,5	1 ÷ 1,5	1 ÷ 1,5	1,2 ÷ 1,5
Power consumption	30 ÷ 60	28 ÷ 60	30 ÷ 60	33 ÷ 45
Connector	3,5 W (DC) - 5 VA (AC)		2,5 W (DC) - 3,3 VA (AC)	
Sleeve	AM-5110			
Coil	U1			
Voltage	DA - DC			
Protection degree	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC			
	IP65			


U1 Sleeves - with moving core
Coil-sleeve locking nuts




AA-0150 3/2 NO
AA-0157 3/2 NC
AA-0170 2/2 NC





AM-5213A 3/2 NO
AM-5211A 3/2 NC
AM-5211B 2/2 NC

2/2 - 3/2 U1 Electropilot
2/2 - 3/2 U1 Electropilot G1/8

■ For mounting on U1 G1/8 sub-base


2/2 - 3/2 U1 Electropilot M5
2/2 - 3/2 U1 CNOMO Electropilot

■ For mounting on U2 G1/8 SPEED sub-base


SPEED Series modular sub-base

■ U1 sub-base G1/8



AA-0450



2/2 - 3/2
U1 Electropilot

■ CNOMO sub-base G1/8



AB-0900



2/2 - 3/2
U1 CNOMO Electropilot

Manual override:

Impulse screw – 2 positions (standard supplied). Recessed button – 1 position, Impulse screw – 1-2 positions, Locking nut with button – 1 position (upon request)
Solenoid valves are supplied without coil and connector

CHARACTERISTICS

Ambient temperature	-10 ÷ +50 °C			
Fluid	10 µm filtered air, with or without lubrication; neutral gases (versions for different fluids available upon request)			
Commutation system	direct intervention poppet with cushioned seals			
Pressure	0 ÷ 10 bar (2/2, 3/2 NC), 3 ÷ 10 bar (3/2 NO)			
Connections	on sub-base / threaded on the body			
Nominal bore (mm)	sub-base	G 1/8	G1/4	CNOMO
2,1 ÷ 2,4	2,1 ÷ 2,4	1,6 ÷ 6	2,1 ÷ 2,4	
Nominal flow rate (NL/min)	92 ÷ 150	100 ÷ 155	95 ÷ 650	92 ÷ 110
Power consumption	11W (DC) - 10 VA (AC)			
Connector	AM-5111			
Sleeve	U2			
Coil	DB			
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC			
Protection degree	IP65			



U2 Sleeves - with moving core

Coil-sleeve locking nuts



AB-0600 3/2 NO
AB-0613 3/2 NC
AB-0640 2/2 NC^(a)
AB-0643 2/2 NC




AM-5214A 3/2 NO
AM-5212A 3/2 NC
AM-5212B 2/2 NC



(a) = Suitable for bases with diameter 3 ÷ 6 mm

2/2 - 3/2 U2 Electropilot

For mounting on U2 sub-base G1/8

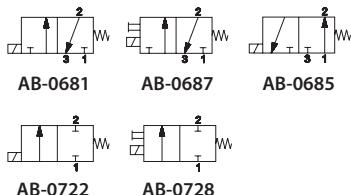

2/2 - 3/2 U2 Electropilot G1/8

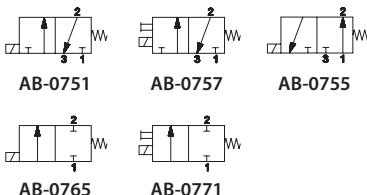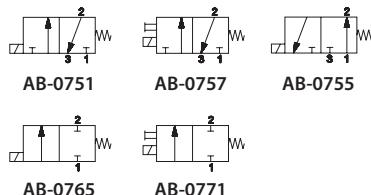

2/2 - 3/2 U2 Electropilot G1/4





	Ø	Max Pressure (bar)
AB-0822	1,6	30
AB-0819	2	20
	2,4	15
	3	10
	3,5	9
	4	8
	4,5	7
	5	6,5
DB-0607 24V AC - 50/60 Hz	5,5	6
DB-0608 110V AC - 50/60 Hz	6	5
DB-0610 220V AC - 50/60 Hz		

U2 - 17 VA Coil for version 2/2
DB-0607 24V AC - 50/60 Hz
DB-0608 110V AC - 50/60 Hz
DB-0610 220V AC - 50/60 Hz

2/2 - 3/2 U2 CNOMO Electropilot

For mounting on U2 G1/8 SPEED sub-base

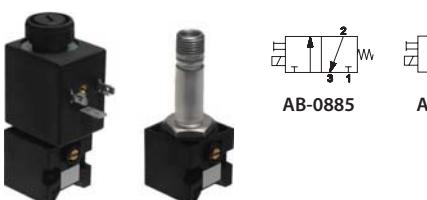

SPEED Series modular sub-base

U2 G1/8 sub-base



AB-0900



2/2 - 3/2
U2 Electropilot



2/2 - 3/2
U2 CNOMO Electropilot

Manual override:

Impulse screw – 2 positions (standard supplied). Recessed button - 1 position, Impulse screw - 1-2 positions, Locking nut with button – 1 position (upon request)

Solenoid valves are supplied without coil and connector

ORIGINAL

Valves and sub-bases UNIVER Original since 1980

MIXED and SPOOL SYSTEM


Versions with either mixed or spool system available for all series



MIXED
for heavy applications



SPOOL
for all applications

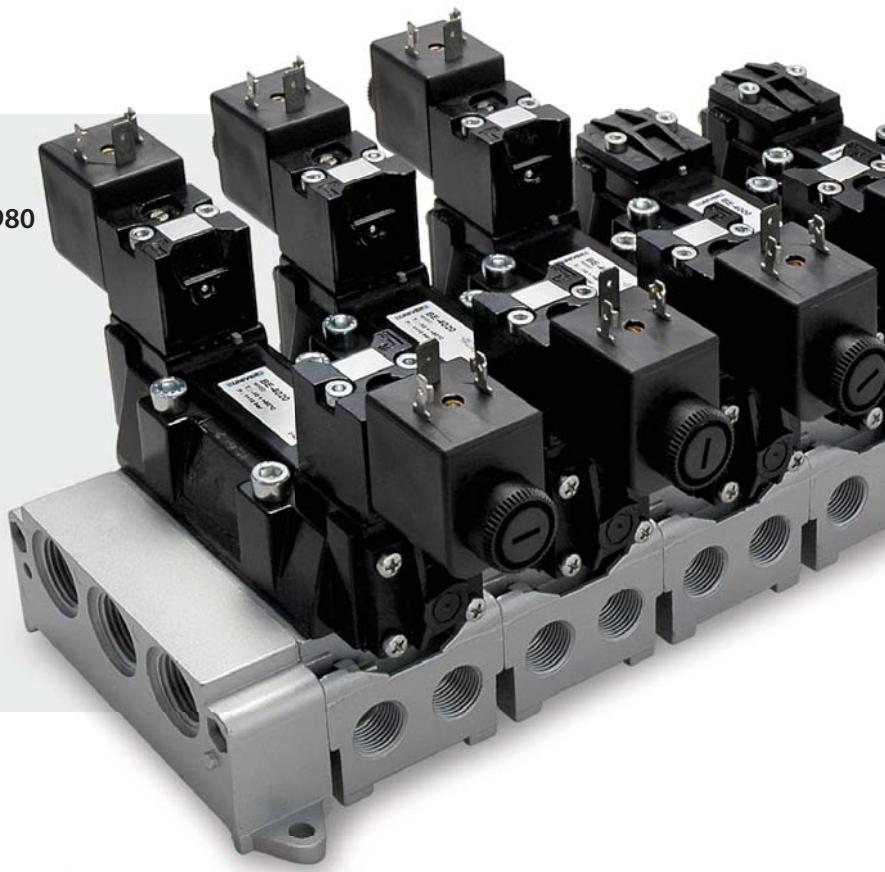**BE 3****ISO 1**

1480
NI/min

BE 4**ISO 2**

2300
NI/min

BE 5**ISO 3**

4200
NI/min

BE 6**ISO 4**

6600
NI/min

CHARACTERISTICS

Ambient temperature	-10 ÷ +50 °C			
Fluid	50 µm filtered air (mixed system)			
Commutation system	50 µm filtered air, with or without lubrication (spool system) mixed and spool			
Max pressure	10 bar			
Connection	ISO 5599/1 interface			
	size 1	size 2	size 3	size 4
Nominal bore (mm)	8	10	15	19
Nominal flow rate (NL/min)	1480	2300	4200	6600
Valve body	acetalic resin with zamak cover			
Seals	NBR and polyurethane (mixed system), NBR (spool system)			
Electropilot/Coil	AA series/U3			
Power consumption	2,5 W (DC) - 5 VA (AC)			
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC			
Manual override	impulse screw - 2 positions (BE), recessed button - 1 position (BE12)			


BE Single/double pneumatic impulse

MIXED SYSTEM		size		
	BE-3100	1		BE-3150
	BE-4100	2		BE-4150
	BE-5100	3		BE-5150
	BE-6100	4		BE-6150
SPOOL SYSTEM		size		
	BE-3800	1		BE-3850
	BE-4800	2		BE-4850
	BE-5800	3		BE-5850
	BE-6800	4		BE-6850
				size
				BE-3170 1
				BE-4170 2
				BE-5170 3
				BE-6170 4
				size
				BE-3870 1
				BE-4870 2
				BE-5870 3
				BE-6870 4

BE Single electrical impulse

MIXED SYSTEM		size		
	BE-3000	1		BE-3060
	BE-4000	2		BE-4060
	BE-5000	3		BE-5060
	BE-6000	4		BE-6060
SPOOL SYSTEM		size		
	BE-3700	1		BE-3760
	BE-4700	2		BE-4760
	BE-5700	3		BE-5760
	BE-6700	4		BE-6760

BE Double electrical impulse

MIXED SYSTEM		size		
	BE-3020	1		BE-3030
	BE-4020	2		BE-4030
	BE-5020	3		BE-5030
	BE-6020	4		BE-6030
SPOOL SYSTEM		size		
	BE-3200*	1		BE-3205
	BE-4200*	2		BE-4205
	BE-5200*	3		BE-5205
	BE-6200*	4		BE-6205
				size
				BE-3720 1
				BE-4720 2
				BE-5720 3
				BE-6720 4
				size
				BE-3900 1
				BE-4900 2
				BE-5900 3
				BE-6900 4
				size
				BE-3940 1
				BE-4940 2
				BE-5940 3
				BE-6940 4


* = For version with manual override
contact our Sales Department

For versions with recessed button 1 position, add suffix U to part number

Solenoid valves are supplied without coil and connector


BE12 Single electrical impulse

■ MIXED SYSTEM



	size
BE12-3000	1
BE12-4000	2
BE12-5000	3


■ SPOOL SYSTEM



	size
BE12-3700	1
BE12-4700	2
BE12-5700	3


BE12 Double electrical impulse

■ MIXED SYSTEM



	size
BE12-3020	1
BE12-4020	2
BE12-5020	3

■ SPOOL SYSTEM



	size
BE12-3720	1
BE12-4720	2
BE12-5720	3

size



	size
BE12-3205	1
BE12-4205	2
BE12-5205	3



	size
BE12-3900	1
BE12-4900	2
BE12-5900	3

size

	size
BE12-3940	1
BE12-4940	2
BE12-5940	3

Single sub-base, side connections

■ ISO 1



BF-1060
G1/8

BF-1061
G1/4

■ ISO 2



BF-1150
G1/4

BF-1151
G3/8

■ ISO 3



BF-3060
G1/2

BF-3061
G3/4

■ ISO 4



BF-4060
G3/4

BF-4061
G1

Single sub-base, bottom connections

■ ISO 1



BF-1062
G1/8

BF-1063
G1/4

Single or Manifold with separate exhausts

■ ISO 2



BF-1152
G1/4

BF-1153
G3/8

■ ISO 3



BF-3063
G3/4

■ ISO 4



BF-4062
G3/4

BF-4063
G1

Manifold universal system sub-base, bottom and side connections, conveyed exhaust

■ ISO 1



BF-1071
G1/8
BF-1072
G1/4
BF-1071S
G1/8
BF-1072S
G1/4

■ ISO 2



BF-1160
G1/4

BF-1161
G3/8

■ ISO 3



BF-3071
G1/2

BF-3072
G3/4

Manifold universal system inlet plate

ISO 1

BF-1065
G3/8BF-1066
G3/8BF-1068
G3/8

ISO 2

BF-1154
G1/2BF-1155
G1/2

ISO 3

BF-3064
G1

Manifold universal system diaphragm

ISO 1




BF-1070

ISO 2




BF-1162

BF-1085




closing plate for ISO 1 sub-base

BF-1175



closing plate for ISO 2 sub-base 2

BF-3175




closing plate for ISO 3 sub-base 3

BF-3082




universal system plug for ISO 3 sub-base

BF-1190




connecting interface for universal sub-bases size 1 - 2

BF-3190



connecting interface for universal sub-bases size 2 - 3

BF-3191





connecting interface for universal sub-bases size 1 - 3

CHARACTERISTICS



Ambient temperature	-10 ÷ +50 °C	
Fluid	50 µm filtered air, with or without lubrication	
Commutation system	mixed	
Max pressure	10 bar	
Connections	ISO 5599/1 interface (BF series sub-bases)	
	size 1	size 2
Nominal bore (mm)	8	10
Nominal flow rate (NL/min)	1480	2300
Valve body	acetalic resin	
Seals	NBR, polyurethane	
Electropilot/Coil	AA series/U1	
Power consumption	3,5 W (DC) - 5 VA (AC)	
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC	
Connector	AM-5110	
Manual override	impulse screw - 2 positions	



Single/double pneumatic impulse



Single electrical impulse



ISO 1 Sub-base and plate



BF-1060 BF-1061
G1/8 G1/4



BF-1062 BF-1063
G1/8 G1/4



BF-1071 BF-1071S
G1/8 G1/8
BF-1072 BF-1072S
G1/4 G1/4



BF-1065 On top
BF-1066 Rear
BF-1068 In line
G3/8 G3/8



BF-1070

ISO 2 Sub-base and plate



BF-1150 BF-1151
G1/4 G3/8



BF-1152 BF-1153
G1/4 G3/8



BF-1160 BF-1161
G1/4 G3/8




BF-1154 BF-1155
In line Rear
G1/2 G1/2



BF-1162

Solenoid valves are supplied without coil and connector

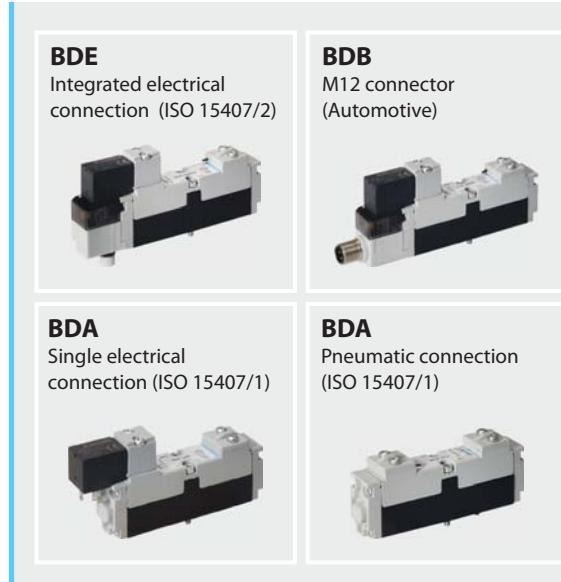

ISO 02

18 mm



■ ISO Interface



18



620
NI/min

■ OVERSIZED interface
(UNIVER original)



18



800
NI/min

ISO 01

26 mm



■ ISO Interface



26



1250
NI/min

■ OVERSIZED interface
(UNIVER original)



26



1700
NI/min

CHARACTERISTICS

Ambient temperature	-20 ÷ +50 °C
Fluid	50 µm filtered air, with or without lubrication
Commutation system	spool
Max pressure	9 bar (electrical) 10 bar (pneumatic)
Connections	ISO 15407-1/2 interface
Nominal bore (mm)	6 (18 mm) 8 (26 mm)
Nominal flow rate (NI/min)	see table below
Valve body	acetalic resin with aluminium cover
Seals	nitrile rubber
Spool	aluminium
Electropilot/Coil	A series/U05
Voltage	12 V DC - 24 V AC/DC - 48 V AC - 110 V AC - 230 V AC
Power consumption	2 W
Manual override	recessed button - 1 position
Protection degree	IP65



CODIFICATION KEY

B	D	E	-	3	3	4	4	2	4	
1				2	3	4	5	6	7	

1 Series	2 Size	3 Type
BDE = Solenoid valves with integrated electrical connection 24 V DC	BDB = Solenoid valves with electrical connection 24 V DC, with connector M12	3 = 18 mm 4 = 26 mm
		2 = 5/2 3 = 5/3 c.c. 4 = 5/3 o.c. 5 = 5/3 p.c.
		6 = 3/2+3/2 NC-NC 7 = 3/2+3/2 NC-NO 8 = 3/2+3/2 NO-NO

Coils and connectors included

4 Control 14	5 Return 12	6 Coil voltage	7 Options
4 = Electrical amplified 5 = Electrical not amplified	0 = Pneumomechanical spring 1 = Mechanical spring 4 = Electrical amplified 7 = Electrical not amplified	24 = 24 V DC (standard) 12 = 12 V DC (upon request)	D = External pilot supply

B	D	A	-	3	3	4	4	
1				2	3	4	5	6

1 Series	2 Size	3 Type
BDA = Valves and solenoid valves	3 = 18 mm 4 = 26 mm	2 = 5/2 3 = 5/3 c.c. 4 = 5/3 o.c. 5 = 5/3 p.c.
		6 = 3/2+3/2 NC-NC 7 = 3/2+3/2 NC-NO 8 = 3/2+3/2 NO-NO

Coils and connectors not included, to be purchased separately

4 Control 14	5 Return 12	6 Options
3 = Pneumatic amplified 4 = Electrical amplified only DC 5 = Electrical amplified DC/AC	0 = Pneumomechanical spring 1 = Mechanical spring 2 = Pneumatic not amplified 3 = Pneumatic amplified	4 = Electrical amplified only DC 5 = Electrical amplified DC/AC 7 = Electrical not amplified only DC 8 = Electrical not amplified DC/AC

c.c. = closed centres o.c. = open centres p.c. = pressurized centres

U05 Coils side 15 mm

Part No.	Nominal voltage		Frequency	Power consumption				
	VD C	V AC		Hz	hold	speed-up	hold	speed-up
	-	24	50/60	-	-	2,3	3,2	
DD-040	-	24	50/60	-	-	2,3	3,2	
DD-041	12	-	-	2	2	-	-	
DD-050	-	48	50/60	-	-	2,3	3,2	
DD-051	24	-	-	2	2	-	-	
DD-060	-	110	50/60	-	-	2,3	3,2	
DD-070	-	230	50/60	-	-	2,3	3,2	

Nominal flow rate (NI/min)

BD 18 mm	VDMA-ISO			Oversized		
	Ø4	Ø6	Ø8	Ø4	Ø6	Ø8
5/2	200	440	620	200	480	800
5/3	200	440	580	200	460	720
3/2+3/2	200	440	600	200	460	720

BD 26 mm	VDMA-ISO				Oversized			
	Ø6	Ø8	Ø10	Ø12	Ø6	Ø8	Ø10	Ø12
5/2	500	950	1200	1250	500	1050	1500	1700
5/3	500	900	1100	1150	500	1050	1300	1400
3/2+3/2	500	950	1150	1250	500	1050	1450	1650

BDE Electrical impulse - Solenoid valve with integrated electrical connection



■ Single impulse



18 mm



26 mm

BDE-324024 18 mm
BDE-424024 26 mmBDE-324124 18 mm
BDE-424124 26 mm





■ Double impulse



18 mm



26 mm

BDE-324424 18 mm
BDE-424424 26 mmBDE-334424 18 mm
BDE-434424 26 mmBDE-364424 18 mm
BDE-464424 26 mmBDE-374424 18 mm
BDE-474424 26 mmBDE-344424 18 mm
BDE-444424 26 mmBDE-354424 18 mm
BDE-454424 26 mm**BDB Electrical impulse - Solenoid valve with connector M12**



■ Single impulse



18 mm



26 mm

BDB-324024 18 mm
BDB-424024 26 mmBDB-324124 18 mm
BDB-424124 26 mm





■ Double impulse



18 mm



26 mm

BDB-324424 18 mm
BDB-424424 26 mmBDB-334424 18 mm
BDB-434424 26 mmBDB-364424 18 mm
BDB-464424 26 mmBDB-374424 18 mm
BDB-474424 26 mmBDB-344424 18 mm
BDB-444424 26 mmBDB-354424 18 mm
BDB-454424 26 mm

BDA Pneumatic impulse









■ Single/double impulse



18 mm



26 mm

BDA-3230 18 mm
BDA-4230 26 mmBDA-3231 18 mm
BDA-4231 26 mmBDA-3233 18 mm
BDA-4233 26 mmBDA-3333 18 mm
BDA-4333 26 mmBDA-3433 18 mm
BDA-4433 26 mmBDA-3533 18 mm
BDA-4533 26 mmBDA-3633 18 mm
BDA-4633 26 mmBDA-3733 18 mm
BDA-4733 26 mmBDA-3833 18 mm
BDA-4833 26 mm**BDA Electrical impulse - External electrical connection**



■ Single impulse



18 mm



26 mm

BDA-3240 18 mm
BDA-4240 26 mmBDA-3241 18 mm
BDA-4241 26 mm








■ Double impulse



18 mm



26 mm


BDA-3244 18 mm
BDA-4244 26 mmBDA-3344 18 mm
BDA-4344 26 mmBDA-3444 18 mm
BDA-4444 26 mmBDA-3544 18 mm
BDA-4544 26 mmBDA-3644 18 mm
BDA-4644 26 mmBDA-3744 18 mm
BDA-4744 26 mmBDA-3844 18 mm
BDA-4844 26 mm

DIN C (8 mm)

For further information please contact
our Sales Office.

BDE Manifold sub-bases - Integrated electrical connection

■ 18 mm

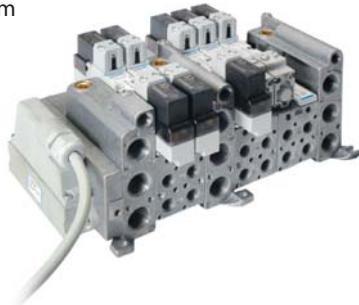

■ 26 mm



18 mm

BDF-3100	BDF-3115	BDF-3120	BDF-3140TIM	BDF-3180	BDF-3185	BDF-3190
left supply plate G3/8	right supply plate G3/8	intermediate supply plate G3/8	multipolar male connection module: 25 poles, type D	pressure separator	closing plate for unused valve place	connecting interface for valves side 18-26 mm
left supply plate G3/8	right supply plate G3/8	intermediate supply plate G3/8	multipolar male connection module: 25 poles, type D	pressure separator	closing plate for unused valve place	connecting interface for valves side 18-26 mm



BDF-3210	BDF-3230(a)	BDF-3310	BDF-3330(a)	BDF-3400	GZR-100	GZR-V10004/06/08
two-place sub-base in compliance with VDMA-ISO flow rate 620 NL/min fittings Ø 4-6-8 mm	two-place sub-base in compliance with VDMA-ISO flow rate 620 NL/min fittings Ø 4-6-8 mm	two-place sub-base with increased flow rate 800 NL/min	two-place sub-base with increased flow rate 800 NL/min fittings Ø 4-6-8 mm	single one-place sub-base with increased flow rate	blanking plug	UNIVER designed fittings GZR-V10004 Ø4 mm GZR-V10006 Ø6 mm GZR-V10008 Ø8 mm
two-place sub-base in compliance with VDMA-ISO flow rate 620 NL/min	two-place sub-base in compliance with VDMA-ISO flow rate 620 NL/min	two-place sub-base with increased flow rate 800 NL/min	two-place sub-base with increased flow rate 800 NL/min	single one-place sub-base with increased flow rate	blanking plug	UNIVER designed fittings GZR-V10004 Ø4 mm GZR-V10006 Ø6 mm GZR-V10008 Ø8 mm

26 mm

BDF-4100	BDF-4115	BDF-4120	BDF-4140TIM	BDF-4180	BDF-4185
left supply plate G1/2	right supply plate G1/2	intermediate supply plate G1/2	multipolar male connection module: 25 poles, type D	plate for separating supply pressures	closing plate for unused valve place
left supply plate G1/2	right supply plate G1/2	intermediate supply plate G1/2	multipolar male connection module: 25 poles, type D	plate for separating supply pressures	closing plate for unused valve place

BDF-4210/20	BDF-4230(a)	BDF-4310/20	BDF-4330/31/32(a)	BDF-4400	GZR-VV1006/08/10
one-place sub-base in compliance with VDMA-ISO flow rate 1250 NL/min BDF-4210 G1/4 connections BDF-4220 G3/8 connections	one-place sub-base in compliance with VDMA-ISO flow rate 1250 NL/min fittings Ø 6-8-10 mm	one-place sub-base with increased flow rate 1700 NL/min BDF-4310 G1/4 connections BDF-4320 G3/8 connections	one-place sub-base with increased flow rate 1700 NL/min fittings Ø 6-8-10 mm	single one-place sub-base with increased flow rate	UNIVER designed fittings GZR-VV1006 Ø6 mm GZR-VV1008 Ø8 mm GZR-VV1010 Ø10 mm
one-place sub-base in compliance with VDMA-ISO flow rate 1250 NL/min BDF-4210 G1/4 connections BDF-4220 G3/8 connections	one-place sub-base in compliance with VDMA-ISO flow rate 1250 NL/min	one-place sub-base with increased flow rate 1700 NL/min BDF-4310 G1/4 connections BDF-4320 G3/8 connections	one-place sub-base with increased flow rate 1700 NL/min	single one-place sub-base with increased flow rate	UNIVER designed fittings GZR-VV1006 Ø6 mm GZR-VV1008 Ø8 mm GZR-VV1010 Ø10 mm

Electrical connections

TSCFN24S000female connector 25 poles sub-D type
no cable - M3x8 fixing screws**TSCFN24S0300**female connector: 25 poles, sub-D type,
prewired for 26 coils (3-5-10m length)
M3x8 fixing screws**TSCFN16D0300**sub-D type male/female flying connector (upon request)
prewired for 16 coils with cable Ø 8 mm (3-5-10 m length)
suitable for dynamic laying - M3 x 8 fixing screws

(a) = sub-base including fixing plate for fittings (fittings excluded)

BDA/BDB Manifold sub-bases - Electrical connection with external connector

18 mm



26 mm



18 mm

BDF-3110	BDF-3115	BDF-3125	BDF-3180	BDF-3185	BDF-3191	BDF-3400
left supply plate G3/8	right supply plate G3/8	intermediate supply plate G3/8	pressure separator	closing plate for unused valve place	interface for connecting valves side 18-26 mm	single one-place sub-base with increased flow rate


BDF-3211/2 (b)	BDF-3231/2 (a) - (b)	BDF-3311/2 (b)	BDF-3331/2 (a) - (b)	GZR-100	GZR-V10004/6/8	DD...
two-place sub-base in compliance with VDMA-ISO flow rate 620 NL/min G1/8 connections	two-place sub-base in compliance with VDMA-ISO flow rate 620 NL/min fittings Ø 4-6-8 mm	two-place sub-base with increased flow rate 800 NL/min G1/8 connections	two-place sub-base with increased flow rate 800 NL/min fittings Ø 4-6-8 mm	blanking plug	GZR-V10006 Ø6 mm GZR-V10008 Ø8 mm	U05 coil side 15 mm

26 mm

BDF-4110	BDF-4115	BDF-4125	BDF-4180	BDF-4185	BDF-4400
left supply plate G1/2	right supply plate G1/2	intermediate supply plate G1/2	pressure separator	closing plate for unused valve place	single one-place sub-base with increased flow rate

BDF-4211/.. (b)	BDF-4231/2 (a) - (b)	BDF-4311/.. (b)	BDF-4331/2 (a) - (b)	GZR-VV1006/8/10	DD...
					U05 coil side 15 mm
one-place sub-base in compliance with VDMA-ISO flow rate 1250 NL/min G1/4 connect. G3/8 connect.	one-place sub-base in compliance with VDMA-ISO flow rate 1250 NL/min fittings Ø 6-8-10 mm	BDF-4211 BDF-4212 BDF-4221 BDF-4222	BDF-4231 BDF-4232 BDF-4233 BDF-4234	BDF-4311 BDF-4312 BDF-4321 BDF-4322	GZR-VV1008 Ø8 mm GZR-VV1010 Ø10 mm

Electrical connections







AM-5109

15 mm connector

(a) = sub-base including fixing plate for fittings (fittings excluded)
 (b) = part no. ending: 1 = electrical non integrated 2 = only pneumatic

CHARACTERISTICS

Ambient temperature	-10 ÷ +45 °C
Fluid	50 µm filtered air, with or without lubrication
Commutation system	poppet mixed
Max pressure	10 bar
Connections	G1/4 (1-3-5), NAMUR interface (2-4)
Nominal bore (mm)	8
Nominal flow rate (NL/min)	1200
Valve body	zamak
Seals	NBR, polyurethane
Spool	aluminium
Electropilot/Coil	AA series/U1-U3
Power consumption	3,5 W (DC), 5 VA (AC)
Connector	AM-5110
Voltage	2 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC
Manual override	impulse screw - 2 positions


Pneumatic impulse
 Single impulse

 Double impulse

Electrical impulse
 Single impulse

 Double impulse


Version 3/2: valves are supplied with proper flat plug for closing unused way
Solenoid valves are supplied without coil / connector / locking nut






 AC-N8500 with YR2 actuator


For further information please contact our Sales Office

CHARACTERISTICS

Ambient temperature	-10 ÷ +45 °C	
Fluid	50 µm filtered air, with or without lubrication	
Commutation system	spool	
Max pressure	10 bar	
Connections	G1/8	G1/4
Nominal bore (mm)	6,5	8,5
Nominal flow rate (NL/min)	890	1480
Valve body	die-cast zamak (G1/8), aluminium (G1/4)	
Seals	NBR	
Spool	aluminium	
Electropilot/Coil	AA series/U1-U3	
Power consumption	3,5 W (DC) - 5 VA (AC)	
Connector	AM-5110	
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC	
Manual override	impulse screw - 2 positions	

NOTE: some versions with high temperature seals are available upon request
 (for further information please contact our Sales Office)

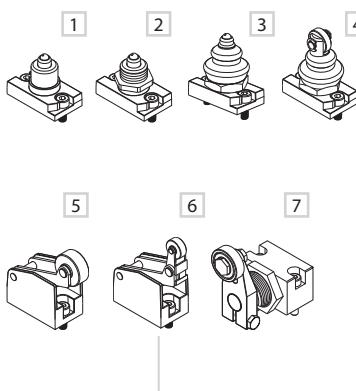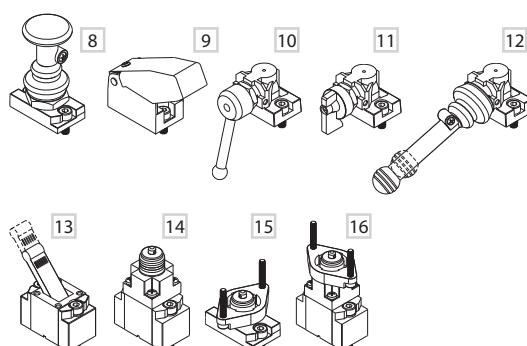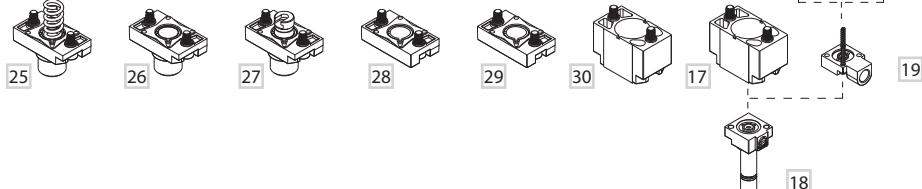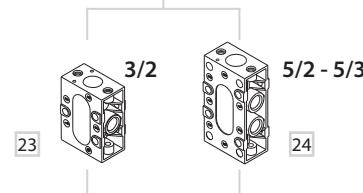
UNIVERSAL Modular System
MECHANICAL

MANUAL

ELECTRICAL

PNEUMATIC

BODY

- 23 3/2 body
- 24 5/2 body

RETURN

- 25 Mechanical spring
- 26 Pneumatic not amplified
- 27 Bottom plate - 2/3 positions
- 28 Bottom plate
- 29 Pneumatic spring
- 30 Pneumatic amplified

MECHANICAL CONTROL

- 1 Ball push
- 2 Ball push for screw panel mounting
- 3 Ball push with dust protection
- 4 Roller with dust protection
- 5 Roller lever
- 6 One-way roller lever
- 7 Two-way side roller lever

MANUAL CONTROL

- 8 Push-pull
- 9 Push button
- 10 Rotating lever
- 11 Selector

ELECTRICAL CONTROL



- 12 90° short/long lever
- 13 Short/long lever
- 14 Threaded indirect operation
- 15 Panel direct operation
- 16 Panel indirect operation
- 17 Electrical amplified
- 18 U1 electropilot
- 19 Plate for external pilot supply
- 20 Angle plate for "H" solenoid option
- 21 Angle plate for "P" solenoid option
- 22 Pneumatic amplified

PNEUMATIC CONTROL



Valves G1/8 with direct mechanical operation

3


■ Roller lever





■ One-way roller lever





■ NEW - Two-way side roller lever




■ NEW - Adjustable two-way side roller lever





■ Ball-push




■ Roller with dust protection



■ Ball push with dust protection




■ Ball push for screw panel mounting




Valves G1/4 with direct mechanical operation

■ Ball push



■ Ball push for screw panel mounting



Valves G1/8 - G1/4 with indirect mechanical operation for pneumatic and mechanical operators

■ Ball push

CL-110A G 1/8

CL-9110A G 1/4



CL-110P G 1/8

CL-9110P G 1/4

12 → 2 3 4 ← 10

CM-410A G 1/8

CM-9410A G 1/4



CM-410P G 1/8

CM-9410P G 1/4

14 → 2 3 4 ← 12

■ Sensible ball push

CL-111A G 1/8

CL-9111A G 1/4




CL-111P G 1/8

CL-9111P G 1/4

12 → 2 3 4 ← 10

CM-411A G 1/8

CM-9411A G 1/4



CM-411P G 1/8

CM-9411P G 1/4

14 → 2 3 4 ← 12

AI-3550	AI-3551	AI-3560	AI-3562	AI-3563	AI-3570	AI-3571	AI-3572	AI-3511	AI-3514	AI-3515	AI-3520	AI-3522	AI-3524	AI-3525	AI-3526

Legend:
■ AI-3512 ■ AI-3516 ■ AI-3517 ■ AI-3521 ■ AI-3523 ■
■ AI-3513 ■ AI-3514D ■ AI-3519 ■
■ AI-3516D ■

Valves G1/8 - G1/4 with direct and indirect operation for panel operators

■ Ball push (direct operation)

CL-112A

12 → 2 3 4 ← 10



CL-112P

12 → 2 3 4 ← 10

CM-412A

14 → 2 3 4 ← 12

CM-412P


14 → 2 3 4 ← 12



■ Ball push (indirect operation)

CL-113A G 1/8

CL-9113A G 1/4




CL-113P G 1/8

CL-9113P G 1/4



CM-413A G 1/8

CM-9413A G 1/4



CM-413P G 1/8

CM-9413P G 1/4



AI-3511Q ■	AI-3514Q ■	AI-3515Q ■	AI-3524Q ■
AI-3512Q ■	AI-3516Q ■	AI-3517Q ■	AI-3521Q ■
AI-3513Q ■	AI-3514QD ■	AI-3519Q ■	AI-3523Q ■


Legend:
■ AI-3516QD ■

AI-3511Q ■	AI-3514Q ■	AI-3515Q ■	AI-3520Q ■	AI-3524Q ■	AI-3522Q ■	AI-3525Q ■	AI-3526Q ■
AI-3512Q ■	AI-3516Q ■	AI-3517Q ■	AI-3521Q ■		AI-3523Q ■		

Legend:
■ AI-3513Q ■ AI-3514QD ■ AI-3519Q ■
■ AI-3516QD ■

Valves G1/8 with manual operation


■ Push-pull

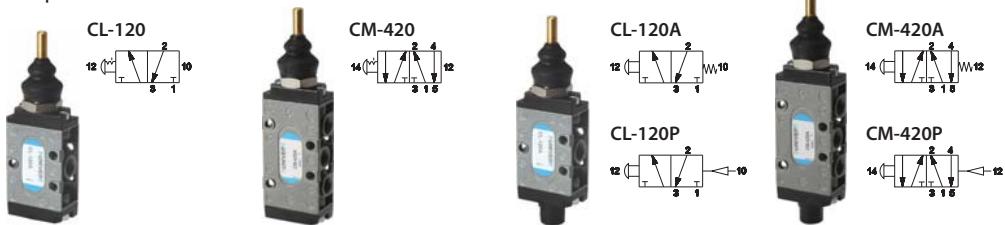


- YELLOW CP-911G
- RED CP-911R
- BLACK CP-911N
- GREEN CP-911V

Valves are supplied without operator

■ Long lever

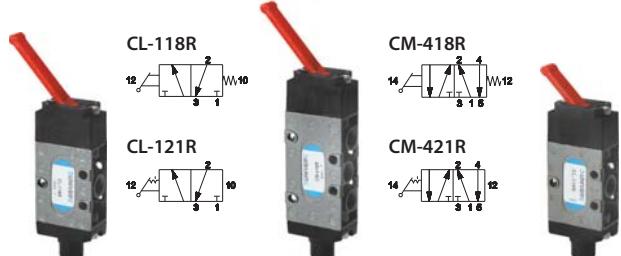

■ Short lever

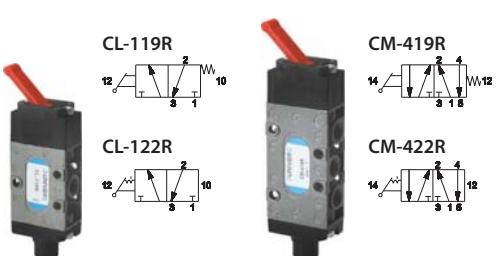

LONG LEVER STANDARD

- RED


- UPON REQUEST
- YELLOW
- BLACK

SHORT LEVER STANDARD

- RED

- UPON REQUEST
- YELLOW
- BLACK
- GREEN

■ Button

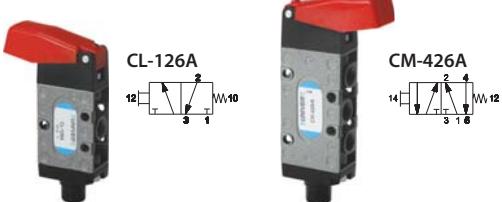

STANDARD

- RED

■ Rotating lever




- RED CP-915R



- RED CP-916R

Valves are supplied without operator

■ 90° Lever

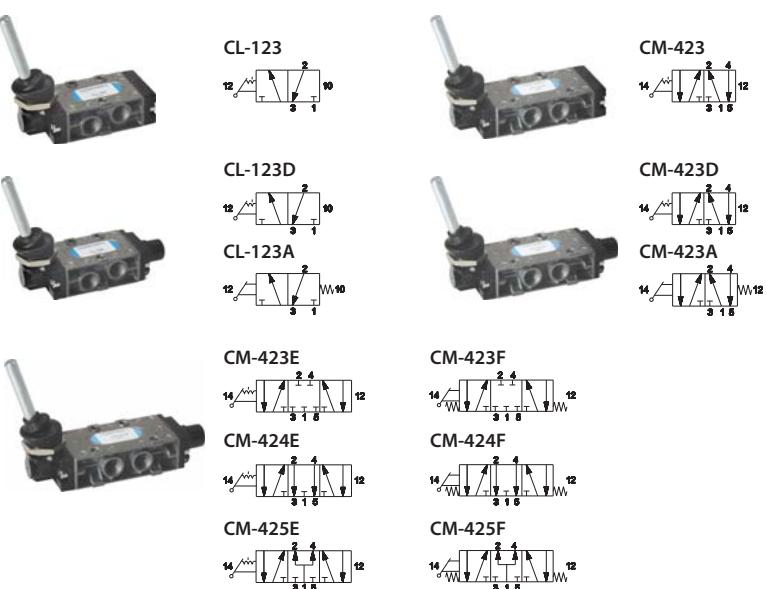

LONG LEVER

- RED CP-913R

SHORT LEVER

- UPON REQUEST
- YELLOW CP-912G
- RED CP-912R
- BLACK CP-912N

Valves are supplied without operator

Valves G1/4 with manual operation

■ Push-pull



- YELLOW CP-911G
- RED CP-911R
- BLACK CP-911N
- GREEN CP-911V

Valves are supplied without operator

■ Long lever

STANDARD
■ REDUPON REQUEST
■ YELLOW
■ BLACK


■ Rotating lever



- RED CP-915R
- RED CP-916R

Valves are supplied without operator

■ 90° Lever

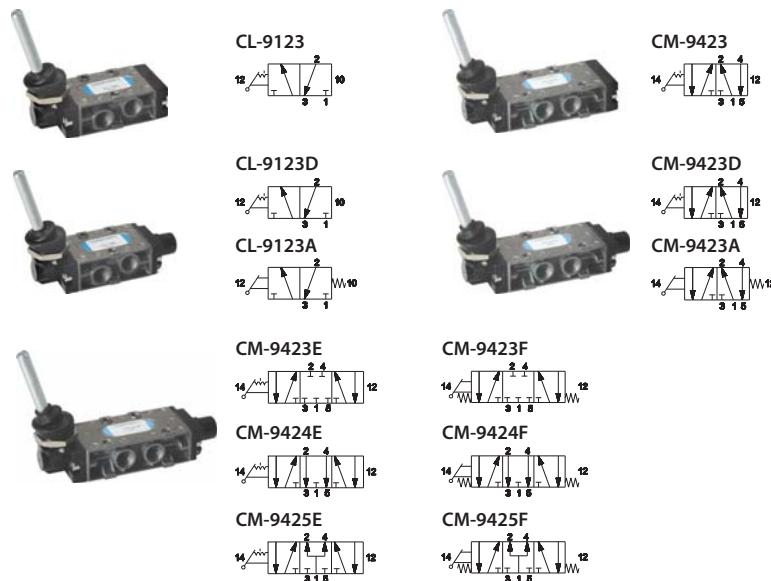

LONG LEVER



- RED CP-913R

SHORT LEVER








- YELLOW CP-912G
- RED CP-912R
- BLACK CP-912N












Valves are supplied without operator

Valves G1/8 - G1/4 with pneumatic operation

■ Single impulse








CL-200 G1/8
CL-9200 G1/4CL-203 G1/8
CL-9203 G1/4CL-200A G1/8
CL-9200A G1/4CM-500 G1/8
CM-9500 G1/4CM-500A G1/8
CM-9500A G1/4

■ Double impulse











CL-220 G1/8
CL-9220 G1/4CL-221 G1/8
CL-9221 G1/4CL-224 G1/8
CL-9224 G1/4CM-521 G1/8
CM-9521 G1/4CM-524 G1/8
CM-9524 G1/4CM-520 G1/8
CM-9520 G1/4CM-580 G1/8
CM-9580 G1/4CM-585 G1/8
CM-9585 G1/4CM-590 G1/8
CM-9590 G1/4

Valves G1/8 - G1/4 with electrical operation

■ Single impulse

CL-300 G1/8
CL-9300 G1/4CL-302A G1/8
CL-9302A G1/4CL-301 G1/8
CL-9301 G1/4CL-303A G1/8
CL-9303A G1/4CM-600 G1/8
CM-9600 G1/4CM-602A G1/8
CM-9602A G1/4

■ Double impulse

CL-320 G1/8
CL-9320 G1/4CL-321 G1/8
CL-9321 G1/4CL-322 G1/8
CL-9322 G1/4CM-620 G1/8
CM-9620 G1/4CM-621 G1/8
CM-9621 G1/4CM-622 G1/8
CM-9622 G1/4CM-680 G1/8
CM-9680 G1/4CM-685 G1/8
CM-9685 G1/4CM-690 G1/8
CM-9690 G1/4

Solenoid valves are supplied without coil, connector and locking nut

AM-5148






Plate for external pilot supply

AM-5151



Angle plate for "H" solenoid option

AM-5152



Angle plate for "P" solenoid option

CLIPS Modular sub-base G1/8 - G1/4 for 3/2 - 5/2 - 5/3 valves




G1/8



G1/4


CP-100/CP-9100



modular sub-base with adjustable and conveyed exhausts
CP-100 for G1/8, **CP-9100** for G1/4
material: zamak

standard supplied: screws, seals, exhaust regulator
and coupling for valve fixing


CP-101/CP-9101



modular sub-base without adjustable exhausts
CP-101 for G1/8, **CP-9101** for G1/4
material: zamak

standard supplied: screws, seals and
coupling for valve fixing

CP-105/CP-9105



side connection inlet plate
CP-105 G1/4, **CP-9105** G3/8
material: zamak


standard supplied: screws and seals

CP-106



closing plate for unused place
material: aluminium

CP-110/CP-9110



coupling
connections: **CP-110** G1/8, **CP-9110** G1/4
material: brass

CP-111/CP-9111



pressure separator
CP-111 for G1/8, **CP-9111** for G1/4
material: aluminium

CP-112/CP-9112



plug for 3/2 valve mounting
CP-112 for G1/8, **CP-9112** for G1/4
material: aluminium

CP-113/CP-9113




adjustment needle
CP-113 for G1/8, **CP-9113** for G1/4
material: brass

For each additional pressure, one coupling and two separators are required

Plug for mounting 3/2 NC-NO valves on "CLIPS" sub-base to close unused way.
Sub-base with adjustment screw (screwdriver slot) standard supplied.
Upon request: adjustment needle with milled handle

Assembly Example

Manifold supplied by three different pressures

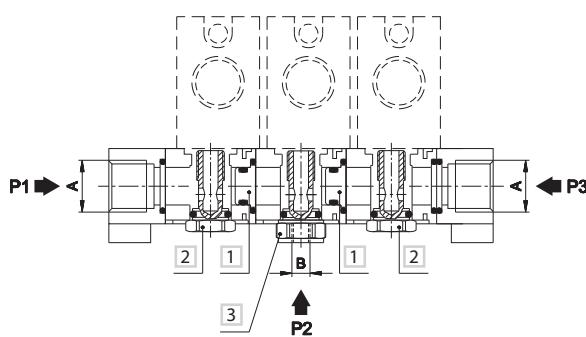

	A	B
G1/8	G1/4	G1/8
G1/4	G3/8	G1/4

- [1] Pressure separator CP-111/CP-9111
- [2] Fixing coupling for valve embodied in the sub-base
- [3] Coupling CP-110/CP-9110

CHARACTERISTICS

Ambient temperature	-10 ÷ +45 °C
Fluid	10 µm filtered air
Commutation system	spool
Max pressure	10 bar
Connections	M5, for sub-base
Nominal bore (mm)	2
Nominal flow rate (NL/min)	150
Valve body	zamak
Seals	NBR
Electropilot/Coil	A series/U05
Voltage	24 V DC -12 V DC - 24 V AC - 110 V AC - 230 V AC



CODIFICATION KEY

E - 0 2 2 4

1 2 3 4

1 Series

E = COMPA 2 Miniature Valves

2 Type

- 02 = 5/2 Sub-base mounting
- 04 = 5/2 Threaded body M5
- 05 = 5/3 c.c. Sub-base mounting
- 06 = 5/3 o.c. Sub-base mounting
- 07 = 5/3 p.c. Sub-base mounting
- 08 = 5/3 c.c. Threaded body M5
- 09 = 5/3 o.c. Threaded body M5
- 10 = 5/3 p.c. Threaded body M5

3 Control 14

- 2 = Electrical DC
- 4 = Pneumatic
- 7 = Electrical DC/AC


4 Return 12

- 0 = Pneumomechanical spring
- 2 = Electrical DC
- 4 = Pneumatic impulse
- 7 = Electrical DC/AC


c.c. = closed centres o.c. = open centres p.c. = pressurized centres

Pneumatic impulse

Single impulse




Double impulse



Electrical impulse

Single impulse



Double impulse



E-0222
E-0277

E-0522

E-0622

E-0722

Inlet plate G1/8



E-4500

Manifold sub-base, side connections M5




E-4505

Solenoid valves are supplied without coil and connector


Pneumatic impulse - 5/2 Valves M5

■ Single impulse



E-0440


■ Double impulse



E-0444

Electrical impulse - 5/2 Valves M5


■ Single impulse



E-0420

E-0470

■ Double impulse



E-0422

E-0477

Electrical impulse - 5/3 Valves M5

■ Double impulse



E-0822



E-0922



E-1022







DIN C (8 mm)

For further information please
contact our Sales Office

Solenoid valves are supplied without coil and connector

5/2 Valves M5 - Mechanical and manual operation

3

															
Lever valve	Push-pull valve	Ball push valve													
 LEVER E-15422G ■ YELLOW E-15422N ■ BLACK E-15422R ■ RED	 E-15420  E-15420A	 E-15402A													
Ball push valve for mechanical screw operation	Ball push valve for mechanical panel operation														
 E-15403A	 E-15412A														
AI-3550	AI-3551	AI-3560	AI-3562	AI-3563	AI-3570	AI-3571	AI-3572	AI-3511Q ■ AI-3512Q ■ AI-3513Q ■ AI-3514 ■ AI-3515 ■ AI-3516 ■ AI-3517 ■ AI-3518 ■ AI-3519 ■ AI-3520 ■ AI-3521Q ■ AI-3522Q ■ AI-3523Q ■ AI-3524Q ■ AI-3525Q ■ AI-3526 ■	AI-3514Q ■ AI-3516Q ■ AI-3517Q ■ AI-3519Q ■ AI-3521Q ■ AI-3524Q ■ AI-3525Q ■ AI-3526 ■	AI-3515Q ■ AI-3516Q ■ AI-3517Q ■ AI-3519Q ■ AI-3521Q ■ AI-3524Q ■ AI-3525Q ■ AI-3526 ■	AI-3520Q ■ AI-3521Q ■ AI-3524Q ■ AI-3525Q ■ AI-3526 ■	AI-3524Q ■ AI-3525Q ■ AI-3526 ■	AI-3522Q ■ AI-3525Q ■ AI-3526 ■	AI-3523Q ■	AI-3526 ■
AI-3511 ■ AI-3512 ■ AI-3513 ■ AI-3514 ■ AI-3515 ■ AI-3516 ■ AI-3517 ■ AI-3518 ■ AI-3519 ■ AI-3520 ■ AI-3521 ■ AI-3522 ■ AI-3523 ■ AI-3524 ■ AI-3525 ■ AI-3526 ■	AI-3514 ■ AI-3516 ■ AI-3517 ■ AI-3518 ■ AI-3519 ■ AI-3521 ■ AI-3522 ■ AI-3523 ■ AI-3524 ■ AI-3525 ■ AI-3526 ■	AI-3515 ■ AI-3516 ■ AI-3517 ■ AI-3518 ■ AI-3519 ■ AI-3521 ■ AI-3522 ■ AI-3523 ■ AI-3524 ■ AI-3525 ■ AI-3526 ■	AI-3516Q ■ AI-3517Q ■ AI-3519Q ■ AI-3521Q ■ AI-3524Q ■ AI-3525Q ■ AI-3526 ■	AI-3517Q ■ AI-3519Q ■ AI-3521Q ■ AI-3524Q ■ AI-3525Q ■ AI-3526 ■	AI-3518Q ■ AI-3519Q ■ AI-3521Q ■ AI-3524Q ■ AI-3525Q ■ AI-3526 ■	AI-3519Q ■ AI-3521Q ■ AI-3524Q ■ AI-3525Q ■ AI-3526 ■	AI-3520Q ■ AI-3521Q ■ AI-3524Q ■ AI-3525Q ■ AI-3526 ■	AI-3521Q ■ AI-3524Q ■ AI-3525Q ■ AI-3526 ■	AI-3522Q ■ AI-3525Q ■ AI-3526 ■	AI-3523Q ■	AI-3526 ■				

CHARACTERISTICS

Ambient temperature	-10 ÷ +45 °C
Fluid	10 µm filtered air
Commutation system	spool
Max pressure	10 bar
Connections	for sub-base
Nominal bore (mm)	4
Nominal flow rate (NL/min)	390
Valve body	acetalic resin
Seals	NBR
Electropilot/Coil	A series/U05
Voltage	24 V DC -12 V DC - 24 V AC - 110 V AC - 230 V AC



CODIFICATION KEY

F	-	0	2	2	4
1		2	3	4	

1 Series	2 Type	3 Control 14	4 Return 12
F = COMPA 4 Miniature Valves	02 = 5/2 Sub-base mounting 05 = 5/3 c.c. Sub-base mounting 06 = 5/3 o.c. Sub-base mounting 07 = 5/3 p.c. Sub-base mounting	2 = Electrical DC 4 = Pneumatic 7 = Electrical DC/AC	0 = Pneumomechanical spring 2 = Electrical DC 4 = Pneumatic impulse 7 = Electrical DC/AC
c.c. = closed centres			
o.c. = open centres			
p.c. = pressurized centres			

Pneumatic impulse

■ Single impulse			

Electrical impulse

■ Single impulse			

Inlet plate G1/8

	F-4500		F-4505
--	--------	--	--------

Solenoid valves are supplied without coil and connector

CHARACTERISTICS








Ambient temperature	-5 ÷ +50 °C
Fluid	50 µm filtered air, with or without lubrication
Commutation system	spool
Pressure	1,5 ÷ 9 bar
Nominal bore (mm)	5
Nominal flow rate (NI/min)	770 (5/2) 700 (5/3) 670 (3/2+3/2)
Connections	G1/8
Valve body	zamak
Seals	NBR
Spool	aluminium
Electropilot/Coil	A series/U05 - B series/U04
Voltage	24 V DC -12 V DC - 24 V AC - 110 V AC - 230 V AC (only for version with integrated electrical connection)
Power consumption	U05 = 2 W (DC) 2,3 VA (AC) U04 = 1,2 W (DC)
Manual override	recessed button - 1 position


CODIFICATION KEY

G	-	6	6	4	4	
1	2	3	4	5		

1 Series	2 Type	3 Control 14
G-6 = 20 mm - Valves and solenoid valves threaded body G1/8	2 = 5/2 6 = 3/2+3/2 NC-NC 3 = 5/3 c.c. 7 = 3/2+3/2 NC-NO 4 = 5/3 o.c. 8 = 3/2+3/2 NO-NO 5 = 5/3 p.c.	3 = Pneumatic amplified 4 = Electrical amplified DC 5 = Electrical amplified DC/AC 6 = Electrical amplified DC - B series 10 mm electropilot
4 Return 12		5 Option
0 = Pneumomechanical spring 4 = Electrical amplified DC 1 = Mechanical spring 5 = Electrical amplified DC/AC 3 = Pneumatic amplified 6 = Electrical amplified DC - B series 10 mm electropilot		D = External pilot supply


c.c. = closed centres o.c. = open centres p.c. = pressurized centres

Pneumatic impulse
Single impulse

G-6230
G-6231
Double impulse

G-6233
G-6333

G-6433

G-6533

G-6633

G-6733

G-6833


Solenoid valves are supplied without coil and connector

Electrical impulse - A series 15 mm Electropilot

■ Single impulse



G-6240 DC
G-6250 AC/DC



G-6241 DC
G-6251 AC/DC




Coil with integrated connector
for multipolar version
DD-051-2C 24 V DC
DD-040-2C 24 V AC

Single/double impulse


■ Double impulse




G-6244 DC
G-6255 AC/DC




G-6344 DC
G-6355 AC/DC




G-6444 DC
G-6455 AC/DC




G-6544 DC
G-6555 AC/DC



G-6644 DC
G-6655 AC/DC



G-6744 DC
G-6755 AC/DC



G-6844 DC
G-6855 AC/DC




DIN C (8 mm)

For further information please
contact our Sales Office

Electrical impulse - B series 10 mm Electropilot

■ Single impulse




G-6260
G-6261


■ Double impulse



G-6266




G-6366




G-6466




G-6566



G-6666



G-6766



G-6866

Solenoid valves are supplied without coil and connector


Electrical sub-base

■ Multipolar connection ■ External connection ■ Connector with loose cables

3




GP-6100 **GP-6110** **GP-611212** **GP-611806** **GP-6310/1/2** **GP-6320/1/2**

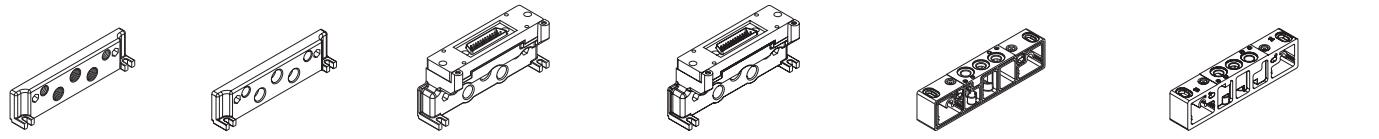

threaded end plate blank end plate threaded end plate with male connector
25 poles
12+12 coils control 12-14 threaded end plate with male connector
25 poles
18 coils control 14
6 coils control 12 sub-base with open diaphragms
GP-6310 without electrical connection
GP-6311 monostable
GP-6312 bistable sub-base with closed diaphragms
GP-6320 without electrical connection
GP-6321 monostable
GP-6322 bistable

GP-6330/1/2 **GP-6340/1/2** **GP-6380** **GP-6385** **GP-6400-1** **GP-6400-2** **GP-6400-5**

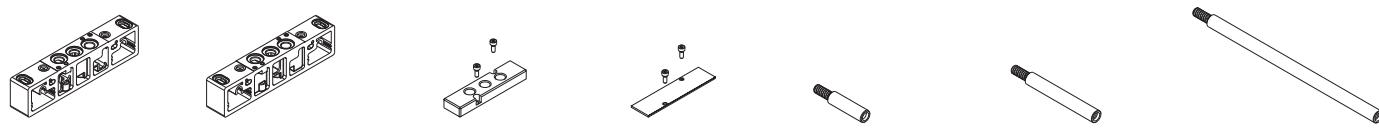

3 1 5	3 1 5	intermediate supply plate (to be used only with GP-63... sub-base)	closing plate for unused valve place	modular tie-rod 1 valve place	modular tie-rod 2 valve places	modular tie-rod 5 valve places
sub-base with closed air supply and open exhausts GP-6330 without electrical connection GP-6331 monostable GP-6332 bistable	sub-base with open air supply and closed exhausts GP-6340 without electrical connection GP-6341 monostable GP-6342 bistable					


AZ4-SN004A

No. 100 hexagonal nuts M4

AZ4-VN0416

No. 100 allen screws M4x16 for tie rods

GP-6512-01/..MF **GP-6514-01/..MF** **GP-651418** **DD-...** **DD-051-2C/DD-040-2C** **DE-652I**

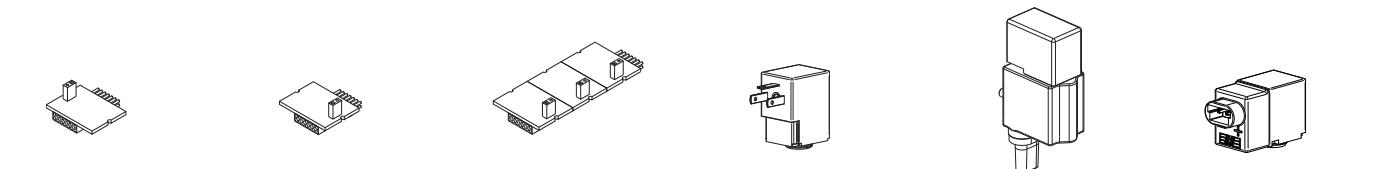


BUS connection card control side 12 with 12 pins GP-6512-01MF 1 place GP-6512-02MF 2 places GP-6512-03MF 3 places GP-6512-05MF 5 places GP-6512-06MF 6 places	BUS connection card control side 14 with 12 pins GP-6514-01MF 1 place GP-6514-02MF 2 places GP-6514-03MF 3 places GP-6514-05MF 5 places GP-6514-06MF 6 places	BUS connection card control side 14 with 18 pins (only 12 places) for manifolds with control 14 and more than 12 coils (up to 18) use GP-651418 card 12 places and then GP-6514-...	24 V DC 2 W coil for single connection	24 V DC 2 W coil with integrated connector for multipolar version	24 V DC 1,35 W coil with in-line connector with protection for a complete tightness
--	--	---	--	---	---

D-530-30/50/200


Customized solutions up to 12 places available upon request

Electrical connections




Miniature connector with loose cables

D-530-30 = wire length 300 mm
D-530-50 = wire length 500 mm
D-530-200 = wire length 2000 mm



15 mm connector



TSCF24S0300
TSCF24S0500
TSCF24S1000

sub-D flying female connector in compliance with CEI 20-22 O.R. II prewired for 24 coils (3-5-10 length)
M3x12 fixing screws

CHARACTERISTICS


Ambient temperature	-5 ÷ +50 °C
Fluid	50 µm filtered air, with or without lubrication
Commutation system	spool
Pressure	1,5 ÷ 9 bar
Connections	sub-base interface
Nominal bore (mm)	5
Nominal flow rate (NL/min)	140 ÷ 740 (depending on the type of fittings)
Valve body	zamak
Seals	NBR
Spool	aluminium
Electropilot/Coil	A series/U05 - B series/U04
Voltage	24 V DC -12 V DC - 24 V AC - 110 V AC - 230 V AC (only version with external connection)
Power consumption	U05 = 2 W (DC) 2,3 VA (AC) U04 = 1,2 W (DC)
Manual override	recessed button - 1 position


CODIFICATION KEY


G	L	-	6	6	4	4	
1			2	3	4	5	

1 Series	2 Type	3 Control 14	4 Return 12	5 Option
GL-6 = 20 mm - Valves and Solenoid Valves for sub-base mounting	2 = 5/2 3 = 5/3 c.c. 4 = 5/3 o.c. 5 = 5/3 p.c. 6 = 3/2+3/2 NC-NC 7 = 3/2+3/2 NC-NO 8 = 3/2+3/2 NO-NO	3 = Pneumatic amplified 4 = Electrical amplified DC 5 = Electrical amplified DC/AC 6 = Electrical amplified DC B series 10 mm electropilot	0 = Pneumomechanical spring 1 = Mechanical spring 3 = Pneumatic amplified 4 = Electrical amplified DC 5 = Electrical amplified DC/AC 6 = Electrical amplified DC B series 10 mm electropilot	D = External pilot supply


c.c. = closed centres o.c. = open centres p.c. = pressurized centres

Pneumatic impulse
Single impulse



GL-6230




GL-6231

Double impulse


GL-6233




GL-6333




GL-6433




GL-6533



GL-6633



GL-6733





GL-6833

Solenoid valves are supplied without coil and connector








Electrical impulse - A series 15 mm Electropilot

■ Single impulse

GL-6240 DC
GL-6250 AC/DCGL-6241 DC
GL-6251 AC/DCCoil with integrated connector
for multipolar version
DD-051-2C 24 V DC
DD-040-2C 24 V AC

Single/double impulse

■ Double impulse

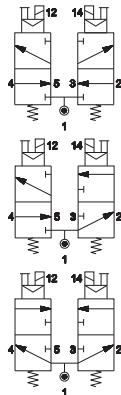
GL-6244 DC
GL-6255 AC/DCGL-6344 DC
GL-6355 AC/DCGL-6444 DC
GL-6455 AC/DCGL-6544 DC
GL-6555 AC/DCGL-6644 DC
GL-6655 AC/DCGL-6744 DC
GL-6755 AC/DCGL-6844 DC
GL-6855 AC/DC

DIN C (8 mm)


For further information please
contact our Sales Office

Electrical impulse - B series 10 mm Electropilot


■ Single impulse

GL-6260
GL-6261


■ Double impulse




GL-6266




GL-6366




GL-6466




GL-6566



GL-6666



GL-6766



GL-6866

Solenoid valves are supplied without coil and connector

Electrical sub-base

■ Multipolar connection



GP-6100

■ External connection




GP-611806


■ Connector with loose cables








GP-6220/1/2



threaded end plate



blank end plate

threaded end plate with
male connector
25 poles
12+12 coils control 12-14threaded end plate with
male connector
25 poles
18 coils control 14
6 coils control 12sub-base with
open diaphragms
GP-6210 without
electrical connection
GP-6211 monostable
GP-6212 bistablesub-base with
closed diaphragms
GP-6220 without
electrical connection
GP-6221 monostable
GP-6222 bistablesub-base with
closed air supply and
open exhausts
GP-6230 without
electrical connection
GP-6231 monostable
GP-6232 bistablesub-base with
open air supply and
closed exhausts
GP-6240 without
electrical connection
GP-6241 monostable
GP-6242 bistableintermediate supply plate
(to be used only with
GP-63... sub-bases)closing plate for
unused valve place

lifting bracket

GP-6400-1



GP-6400-2

GP-6400-5

GP-6512-01/..MF

GP-6514-01/..MF

GP-651418

modular tie-rod
1 valve placemodular tie-rod
2 valve placesmodular tie-rod
5 valve placesBUS connection card
control side 12 with 12 pins
GP-6512-01MF 1 place
GP-6512-02MF 2 places
GP-6512-03MF 3 places
GP-6512-05MF 5 places
GP-6512-06MF 6 placesBUS connection card
control side 14 with 12 pins
GP-6514-01MF 1 place
GP-6514-02MF 2 places
GP-6514-03MF 3 places
GP-6514-05MF 5 places
GP-6514-06MF 6 placesBUS connection card
control side 14 with 18 pins
(only 12 places)
for manifolds with control 14
with more than 12 coils
(up to 18) use GP-651418
card 12 places and then
GP-6514-...

AZ4-SN004A

No. 100 nuts M4 for tie-rods

AZ4-VN0416

No. 100 screws M4x16 for tie-rods

customized solutions up to 12 places available upon request

GZR-100

GZR-V10004/6/8

GZR-V20004/6/8

GZR-V20L004/6/8



blanking plug


straight fitting
GZR-V10004 tube: 4 mm
GZR-V10006 tube: 6 mm
GZR-V10008 tube: 8 mmlow elbow fitting
GZR-V20004 tube: 4 mm
GZR-V20006 tube: 6 mm
GZR-V20008 tube: 8 mmhigh elbow fitting
GZR-V20L004 tube: 4 mm
GZR-V20L006 tube: 6 mm
GZR-V20L008 tube: 8 mm

For sub-bases preset for external pilot supply, add suffix S to part number (e.g. GP-6210S)

DD-...	DD-051-2C/DD-040-2C	DE-652I	D-530-30/50/200
--------	---------------------	---------	-----------------




24 V DC 2 W coil
for single connection



24 V DC 2 W coil
with integrated connector
for multipolar version



24 V DC 1,35 W coil
with in-line connector
with protection for a
complete tightness




Miniature connector with loose
cables
D-530-30 = wire length 300 mm
D-530-50 = wire length 500 mm
D-530-200 = wire length 2000 mm

3


Electrical connections

AM-5109



15 mm connector

TSCF24S0300
TSCF24S0500
TSCF24S1000



sub-D flying female connector in compliance with
CEI 20-22 O.R. II prewired for 24 coils (3-5-10 m length)
M3x12 fixing screws

■ Example of panel mounting




CHARACTERISTICS

Ambient temperature	-10 ÷ +45 °C
Fluid	50 µm filtered air, with or without lubrication
Commutation system	spool
Max pressure	10 bar
Nominal bore (mm)	6
Nominal flow rate (NL/min)	860
Connector	G1/8
Valve body	zamak
Seals	NBR
Spool	aluminium
Electropilot/Coil	AA series/U1-U3
Power consumption	3,5 W (DC), 5 VA (AC)
Connector	AM-5110
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC
Manual override	impulse screw - 2 positions




Pneumatic impulse

Single impulse




Double impulse




Electrical impulse

Single impulse



Double impulse



The valve is supplied with two plugs to be fixed with sealants on unused connections 2-4
 Solenoid valves are supplied without coil/connector/locking nut

Multiple sub-base G1/8




	Places		Places
G-7900-02	2	G-7900-08	8
G-7900-03	3	G-7900-09	9
G-7900-04	4	G-7900-10	10
G-7900-05	5	G-7900-11	11
G-7900-06	6	G-7900-12	12
G-7900-07	7		


G-7885

AM-5151


AM-5152



Closing plate for sub-base place




Angle plate for "H" solenoid option



Angle plate for "P" solenoid option

Threaded connections 2 - 4 on both sides of the valve

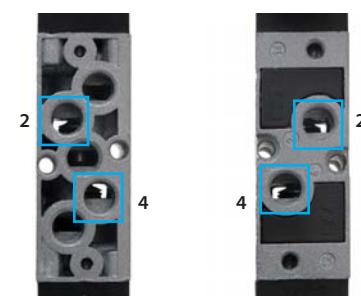

PS

COMBOBOX Valves

INTEGRATED SUB-BASE

MANIFOLD valve with no sub-base

REDUCED DIMENSIONS


Space saving up to 30% in comparison with standard valve MANIFOLDS

HIGH FLOW RATE

830 NL/min spool system UNIVER Original

READY TO USE

Prewired configurations of 2 to 20 valves for a quick installation

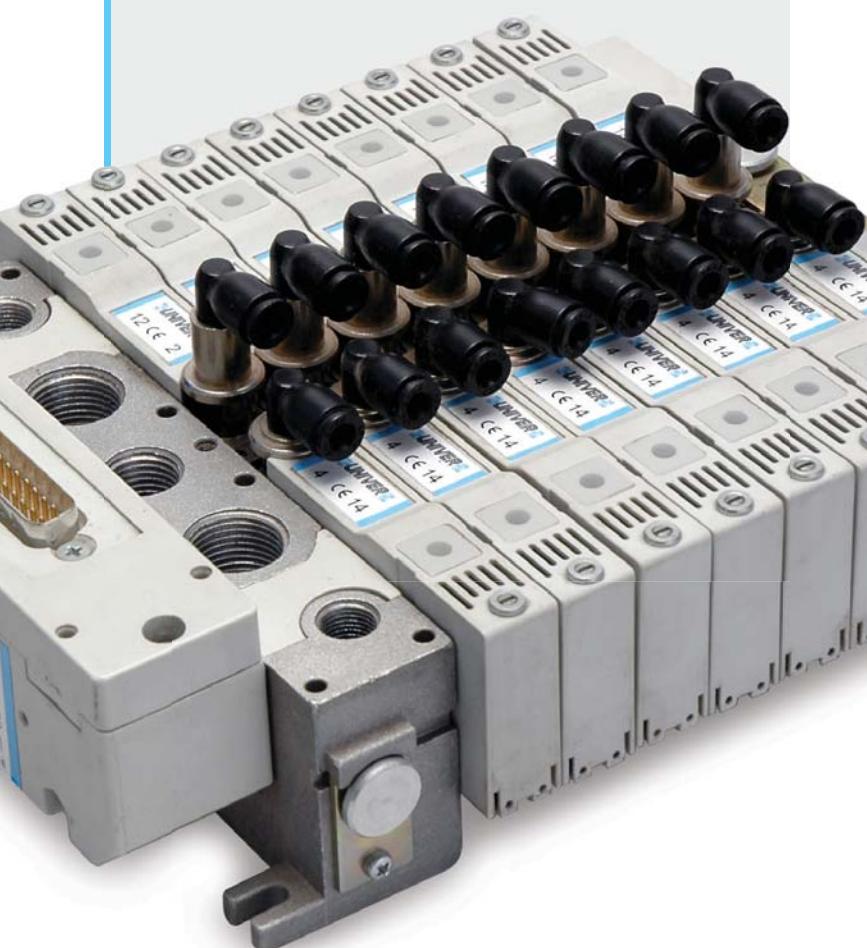

PSC

Single electrical connection



PSP

Multipolar connection



PSR

Pneumatic operation connection



REDUCED DIMENSIONS



MANIFOLD VALVE without sub-base



$\varnothing 4 - 6 - 8$

5/2 - 5/3
3/2+3/2

14,5 → 830
mm NL/min

CHARACTERISTICS

Ambient temperature	-5 ÷ +50 °C (PSC-PSP), -15 ÷ +50 °C (PSR)
Fluid	10 µm filtered air, with or without lubrication
Commutation system	spool
Max pressure	9 bar (electrical control), 10 bar (pneumatic control)
Nominal bore (mm)	6
Nominal flow rate (NI/min)	depending on the type of fittings (see table)
Connections	tube Ø 4, 6, 8
Valve body	zamak
Seals	NBR
Spool	aluminium
Electropilot/Coil	B series/U04
Power consumption	1,35 W
Voltage	24 V DC (12 V DC upon request)
Protection degree	IP65
Manual override	recessed button - 1 position (PSC), impulse screw - 1-2 positions (PSP)



Nominal flow rate (NI/min)

	Ø4	Ø6	Ø8
Straight fitting	200	510	830
Elbow fitting	140	370	700

CODIFICATION KEY


P	S	C	2	6	0	2	4
1	2	3	4	5			

1 Series	2 Type	3 Control 14	4 Return 12	5 Voltage and coil
PSC = Separate wires	2 = 5/2	2 = Pneumatic amplified	0 = Pneumatic spring	Only for PSC and PSP series, assembled coils with standard supplied led
PSP = Plug-in	3 = 5/3 c.c.	6 = Electrical amplified	1 = Mechanical spring	24 = 24 V (standard)
PSR = Pneumatic	4 = 5/3 o.c.		2 = Pneumatic amplified	12 = 12 V (upon request)
	5 = 5/3 p.c.		3 = Pneumatic not amplified	
	6 = 3/2+3/2 NC-NC		6 = Electrical amplified	
	7 = 3/2+3/2 NC-NO		7 = Electrical not amplified	
	8 = 3/2+3/2 NO-NO			


c.c. = closed centres o.c. = open centres p.c. = pressurized centres

PSC Electrical impulse - Electrical connection with separate wires

Single impulse




PSC26024




PSC26124


Double impulse




PSC26624




PSC36624




PSC46624




PSC56624



PSC66624




PSC76624



PSC86624

PSP Electrical impulse - Plug-in integrated electrical connection

■ Single impulse




PSP26024



PSP26124

■ Double impulse



PSP26624




PSP36624




PSP46624




PSP56624



PSP66624




PSP76624




PSP86624

PSR Pneumatic impulse - Pneumatic operation

■ Single impulse




PSR220




PSR221

■ Double impulse



PSR222



PSR223




PSR322




PSR422




PSR522



PSR622



PSR722



PSR822

PSC Manifold with single electrical connection

- With 26 mm inlet plate and 14,5 mm end plate with DIN rail (EN50022)



- With 14,5 mm inlet and end plate



PSP Manifold with multipolar connection

- With 26 mm inlet plate and 14,5 mm end plate with multipolar connector



- With 26 mm inlet plate and 14,5 mm end plate with multipolar connector and intermediate plate




PSR Manifold with pneumatic operation


- With 26 mm inlet plate and 14,5 mm end plate




PS14100

26 mm inlet plate
internal pilot supply

PS14200


26 mm inlet plate
external pilot supply

PS15000




blank plate


PS15100

14,5 mm inlet plate
internal pilot supply


PS15200

14,5 mm inlet plate
external pilot supply

PS15300*

14,5 mm intermediate
plate, closed air supply,
open exhausts

PS15310*	PS15320*	PS15330*	PS15340	PS15350	PS15360
14,5 mm intermediate plate, open supply, closed exhausts	14,5 mm intermediate blank plate	14,5 mm intermediate open plate	intermediate supply plate with closed exhausts and internal pilot supply	intermediate supply plate with closed exhausts and external pilot supply	intermediate supply plate with open exhausts and internal pilot supply

PS15370

intermediate supply plate with open exhausts and external pilot supply

* = For intermediate plate with closed pilot supply ports add suffix 1 to part number.
The intermediate plate takes one valve place. This needs to be considered for a proper purchase of modular tie rods.

Electropilots are supplied through end plates for internal as well as external supply.
In case two different working pressures are applied to the end plates, it is possible to supply either all pilots with one of the two pressures (in general the higher one) or the pilots of each valve group with the working pressure of the same. This is made possible by means of a proper pressure separator.
This same principle applies also in presence of more than two different pressures: in this case it is necessary to use intermediate supply plates suitably coupled with pressure separators.

PSK100145	PSK200145	PSK200290	PSK200725	PSK300145	PSK401

GZR-100	GZR-101	GZR-102	GZR-V10004/6/8	GZR-V20004/6/8	GZR-V20L004/6/8

TIM06M/10M/20M	TIM06B/10B	D-530C-100/200

male connector 25 poles, prewired for monostable valves (M)
TIM06M (Max 6M)
TIM10M (Max 10M)
TIM20M (Max 20M)

male connector 25 poles, prewired for bistable valves (B)
TIM06B (Max 6B)
TIM10B (Max 10B)

miniature bipolar flying connector:
stripped and tinned for protection
D-530C-100 (wire length 1000 mm)
D-530C-200 (wire length 2000 mm)

Electrical connections

TSCF000	TSCF24S0300 TSCF24S0500 TSCF24S1000

sub-D female connector 25 poles without cable

sub-D flying female connector in compliance with
CEI 20-22 O.R. II prewired for 24 coils (3-5-10 m length)
M3x12 fixing screws

MIXED SYSTEM



For heavy applications
Fast commutation
Large number of cycles
High flow rate



AC 7

G1/8



1080
NI/min

AC 8

G1/4



1600
NI/min

AC 9

G1/2



4600
NI/min

Angle plate for "H"
solenoid option



Angle plate for "P"
solenoid option



Plate for external pilot
supply





CHARACTERISTICS


Ambient temperature	-10 ÷ +45 °C		
Fluid	50 µm filtered air, with or without lubrication		
Commutation system	poppet mixed system		
Max pressure	10 bar		
Connections	G1/8	G1/4	G1/2
Nominal bore (mm)	6	8	15
Nominal flow rate (NL/min)	1080	1600	4600
Valve body	zamak	zamak	die-cast aluminium
Seals	NBR, polyurethane		
Spool	aluminium		
Electropilot	U1	U1	U2
Coil	DA	DA	DB
Power consumption	3,5 W (DC) - 5 VA (AC)	3,5 W (DC) - 5 VA (AC)	11 W (DC) - 10 VA (AC)
Connector	AM-5110	AM-5110	AM-5111
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC		
Manual override	impulse screw - 2 positions		



Indirect mechanical operation

■ Preset for pneumatic, mechanical and manual operators				■ Preset for panel operators Ø22			
  AC-7010 G1/8 AC-8010 G1/4 AC-9010 G1/2				  AC-7013 G1/8 AC-8013 G1/4 AC-9013 G1/2			
AI-3550	AI-3551	AI-3560	AI-3562	AI-3563	AI-3570	AI-3571	AI-3572
AI-3511Q ■	AI-3514Q ■	AI-3515Q ■	AI-3516Q ■	AI-3512Q ■	AI-3516Q ■	AI-3517Q ■	AI-3512Q ■
AI-3512 ■	AI-3516 ■	AI-3517 ■	AI-3512 ■	AI-3521 ■	AI-3522 ■	AI-3521Q ■	AI-3523Q ■
AI-3513Q ■	AI-3514D ■	AI-3519 ■	AI-3516D ■		AI-3513Q ■	AI-3514D ■	AI-3519Q ■
AI-3511 ■	AI-3514 ■	AI-3515 ■	AI-3516 ■	AI-3520 ■	AI-3522 ■	AI-3524 ■	AI-3525 ■
AI-3512 ■	AI-3516 ■	AI-3517 ■	AI-3512 ■	AI-3521 ■	AI-3522 ■	AI-3524 ■	AI-3526 ■
AI-3513 ■	AI-3514D ■	AI-3519 ■	AI-3516D ■		AI-3513Q ■	AI-3514D ■	AI-3519Q ■

Pneumatic impulse

■ Single impulse	■ Double impulse
  AC-7100 G1/8 AC-8100 G1/4 AC-9100 G1/2	  AC-7120 G1/8 AC-8120 G1/4 AC-9120 G1/2

Electrical impulse

■ Single impulse



AC-7500 G1/8
AC-8500 G1/4
AC-9500 G1/2

■ Double impulse





AC-7520 G1/8
AC-8520 G1/4
AC-9520 G1/2


Solenoid valves are supplied without coil/connector/locking nut

Modular sub-base




■ G1/8

**AC-7900**Sub-base with connections
G1/8**AC-7905**5/2 MIXED system inlet
plate - G1/8

■ G1/4

**AC-8900**Sub-base with threaded
connections G1/4

Sub-bases are supplied with fixing screws

AM-5148plate for external pilot supply
G1/8 - G1/4**AM-5151**Angle plate for "H" solenoid
option G1/8 - G1/4**AM-5152**Angle plate for "P" solenoid
option G1/8 - G1/4

CHARACTERISTICS

Ambient temperature	-10 ÷ +45 °C
Fluid	50 µm filtered air, with or without lubrication
Commutation system	poppet
Max pressure	10 bar
Connections	G1/8
Nominal bore (mm)	5
Nominal flow rate (NL/min)	600 (NC), 550 (NO)
Valve body	zamak
Seals	NBR
Spool	nickel-plated brass



Roller lever - spring



CH-250

CH-252

CH-254

CH-256

One-way roller lever - spring



CH-260

CH-262

CH-264

CH-266

Ball push - spring



CH-270

CH-272

CH-274

CH-276

Button lever - spring



CH-280

CH-282

CH-284

CH-286

AF-AG

Poppet Valves G1/8 ÷ G1 1/2



WIDE RANGE

G1/8 ÷ G1 1/2

2/2 - 3/2 NC-NO

COMPRESSED AIR VERSION

VACUUM VERSION

Available also with external pilot
vacuum supply

HIGH FLOW RATE

Up to 35000 NI/min
(G1 1/2)

AF NI/min	AG m ³ /h
Compressed air	Vacuum
G1/8 (Ø 5,5)	580 1,5
G1/4 (Ø 8) G3/8 (Ø 10)	1100 4 1500 10
G1/2 (Ø 15) G3/4 (Ø 19)	5400 20 6500 35
G1 (Ø 25)	13500 90
G1 1/2 (Ø 39)	35000 180

Poppet system
UNIVER Original since 1973






CHARACTERISTICS



Ambient temperature	Max +50 °C										
Fluid	50 µm filtered air, with or without lubrication										
Commutation system	poppet										
Max pressure	10 bar										
Connections	G1/8	G1/4	G3/8	G1/2	G3/4	G1	G1 1/2				
Nominal bore (mm)	5,5	8	10	15	19	25	39				
Nominal flow rate (NI/min)	580	1100	1500	5400	6500	13500	35000				
Valve body	zamak (G1/8 ÷ G1), aluminium (G1 1/2)										
Seals	polyurethane conical poppets and Vulkollan diaphragm										
Spool	aluminium (G1/8 ÷ G3/8), steel + plastic (G1/2 ÷ G1 1/2)										
	G1/8 ÷ G3/8			G1/4 ÷ G1 1/2							
Electropilot	U1			U2							
Coil	DA			DB							
Power consumption	3,5 W (DC) - 5 VA (AC)			11 W (DC) - 10 VA (AC)							
Connector	AM-5110			AM-5111							
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC										
Manual override	impulse screw - 2 positions										







Solenoid valves G1/8 ÷ G3/8



Solenoid valves G1/2 ÷ G1 1/2




Pneumatic valves with external operation G1/8 ÷ G3/8




Solenoid valves are supplied without coil/connector/locking nut

Pneumatic valves with external operation G1/2 ÷ G1 1/2




3/2 NC-NO
AF-2603 G1/2
AF-2610 G3/4
AF-2615 G1




3/2 NC-NO
AF-2620 G1 1/2


2/2 Solenoid valve for blowing G1



2/2 NC
AF-2550 G1




2/2 NC
AF-2551 G1



2/2 NC
AF-2552 G1

2/2 Pneumatic valve for blowing with ext. operation G1



2/2 NC
AF-2617 G1


Solenoid valves are supplied without coil/connector/locking nut

CHARACTERISTICS

Ambient temperature	Max +50 °C										
Fluid	50 µm filtered air, with or without lubrication - vacuum										
Commutation system	poppet										
Max vacuum	759,5 mm Hg										
Connections	G1/8	G1/4	G3/8	G1/2	G3/4	G1	G1 1/2				
Nominal bore (mm)	5,5	8	10	15	19	25	39				
Valve body	zamak (G1/8 ÷ G1), aluminium (G1 1/2)										
Seals	polyurethane conical poppets and Vulkollan diaphragm ^(a) ; silicon poppets ^(b)										
Spool	aluminium (G1/8 ÷ G3/8), steel + plastic (G1/2 ÷ G1 1/2)										
	G1/8 ÷ G3/8			G1/4 ÷ G1 1/2							
Electropilot	U1			U2							
Coil	DA			DB							
Power consumption	3,5 W (DC) - 5 VA (AC)			11 W (DC) - 10 VA (AC)							
Connector	AM-5110			AM-5111							
Voltage	12 V DC - 24 V DC - 24 V AC - 110 V AC - 230 V AC										
Manual override	impulse screw - 2 positions										


(a) = valve for vacuum with external air operation

(b) = valve for direct vacuum with external vacuum operation

3/3 Solenoid valve for vacuum with external pilot air supply G1/8 ÷ G3/8


3/2 NC
AG-3001 G1/8


3/2 NO
AG-3002 G1/8




3/2 NC
AG-3009 G1/4
AG-3011 G3/8



3/2 NO
AG-3010 G1/4
AG-3012 G3/8

3/2 Solenoid valve for vacuum with external pilot air supply G1/2 ÷ G1 1/2


3/2 NC
AG-3020 G1/2
AG-3040 G3/4
AG-3050 G1




3/2 NO
AG-3021 G1/2
AG-3041 G3/4
AG-3051 G1




3/2 NC
AG-3062 G1 1/2




3/2 NO
AG-3063 G1 1/2

3/2 Pneumatic valve for vacuum with external air operation G1/8 ÷ G3/8



3/2 NC
AG-3071 G1/8



3/2 NO
AG-3072 G1/8



3/2 NC
AG-3073 G1/4
AG-3075 G3/8




3/2 NO
AG-3074 G1/4
AG-3076 G3/8


2/2 NC-NO version available upon request

Solenoid valves are supplied without coil/connector/locking nut


3/2 Pneumatic valve for vacuum with external air operation G1/2 ÷ G1 1/2




3/2 NC
AG-3081 G1/2
AG-3091 G3/4
AG-3100 G1



3/2 NO
AG-3082 G1/2
AG-3092 G3/4
AG-3101 G1




3/2 NC
AG-3110 G1 1/2




3/2 NO
AG-3111 G1 1/2


3/2 Solenoid valve for direct vacuum with pilot vacuum supply G1/4 ÷ G1 1/2




3/2 NC
AG-3210 G1/4
AG-3214 G3/8




3/2 NO
AG-3211 G1/4
AG-3215 G3/8




3/2 NC
AG-3222 G1/2
AG-3232 G3/4
AG-3242 G1



3/2 NO
AG-3223 G1/2
AG-3233 G3/4
AG-3243 G1




3/2 NC
AG-3256 G1 1/2




3/2 NO
AG-3257 G1 1/2


2/2 - 3/2 Solenoid valve for vacuum with direct operation G1/4 - G1/2




3/2 NC
AG-3310 G1/4
AG-3311 G1/4
AG-3312 G1/4
AG-3313 G1/4



2/2 NC
AG-3300 G1/4
AG-3301 G1/4
AG-3302 G1/4
AG-3303 G1/4



3/2 NC
AG-3330 G1/2
AG-3331 G1/2
AG-3332 G1/2



2/2 NC
AG-3320 G1/2
AG-3321 G1/2
AG-3322 G1/2

■ U2 - 17 VA coil



DB-0607 24V AC - 50/60 Hz
DB-0608 110V AC - 50/60 Hz
DB-0610 220V AC - 50/60 Hz

Solenoid valves are supplied without coil/connector/locking nut

CHARACTERISTICS

Ambient temperature	-10 ÷ +90 °C	
Fluid	50 µm filtered air, with or without lubrication	
Commutation system	poppet	
Max pressure	10 bar	
Connections	standard	sensible
Nominal bore (mm)	2,3	1,5
Nominal flow rate (NL/min)	110	55
Force (N)	5	4
Valve body	zamak	
Seals	NBR	
Spool	nickel-plated brass	



Mechanical push button - spring

		AI-3500 standard AI-3500S sensible
		AI-3501 standard AI-3501S sensible
		AI-3502 standard
		AI-3503 2/2 NO Available upon request

Mechanical push button for panel operation - spring


		AI-3500Q standard AI-3500SQ sensible
		AI-3501Q standard AI-3501SQ sensible
		AI-3502Q standard
		AI-3503Q 2/2 NO Available upon request
AI-3550	AI-3551	AI-3560
AI-3562	AI-3563	AI-3570
AI-3571	AI-3572	AI-3573
AI-3574	AI-3575	AI-3576
AI-3577	AI-3578	AI-3579
AI-3580	AI-3581	AI-3582
AI-3583	AI-3584	AI-3585
AI-3586	AI-3587	AI-3588
AI-3589	AI-3590	AI-3591
AI-3592	AI-3593	AI-3594
AI-3595	AI-3596	AI-3597
AI-3598	AI-3599	AI-3600
AI-3601	AI-3602	AI-3603
AI-3604	AI-3605	AI-3606
AI-3607	AI-3608	AI-3609
AI-3610	AI-3611	AI-3612
AI-3613	AI-3614	AI-3615
AI-3616	AI-3617	AI-3618
AI-3619	AI-3620	AI-3621
AI-3622	AI-3623	AI-3624
AI-3625	AI-3626	AI-3627
AI-3628	AI-3629	AI-3630
AI-3631	AI-3632	AI-3633
AI-3634	AI-3635	AI-3636
AI-3637	AI-3638	AI-3639
AI-3640	AI-3641	AI-3642
AI-3643	AI-3644	AI-3645
AI-3646	AI-3647	AI-3648
AI-3649	AI-3650	AI-3651
AI-3652	AI-3653	AI-3654
AI-3655	AI-3656	AI-3657
AI-3658	AI-3659	AI-3660
AI-3661	AI-3662	AI-3663
AI-3664	AI-3665	AI-3666
AI-3667	AI-3668	AI-3669
AI-3670	AI-3671	AI-3672
AI-3673	AI-3674	AI-3675
AI-3676	AI-3677	AI-3678
AI-3679	AI-3680	AI-3681
AI-3682	AI-3683	AI-3684
AI-3685	AI-3686	AI-3687
AI-3688	AI-3689	AI-3690
AI-3691	AI-3692	AI-3693
AI-3694	AI-3695	AI-3696
AI-3697	AI-3698	AI-3699
AI-3700	AI-3701	AI-3702
AI-3703	AI-3704	AI-3705
AI-3706	AI-3707	AI-3708
AI-3709	AI-3710	AI-3711
AI-3712	AI-3713	AI-3714
AI-3715	AI-3716	AI-3717
AI-3718	AI-3719	AI-3720
AI-3721	AI-3722	AI-3723
AI-3724	AI-3725	AI-3726
AI-3727	AI-3728	AI-3729
AI-3730	AI-3731	AI-3732
AI-3733	AI-3734	AI-3735
AI-3736	AI-3737	AI-3738
AI-3739	AI-3740	AI-3741
AI-3742	AI-3743	AI-3744
AI-3745	AI-3746	AI-3747
AI-3748	AI-3749	AI-3750
AI-3751	AI-3752	AI-3753
AI-3754	AI-3755	AI-3756
AI-3757	AI-3758	AI-3759
AI-3760	AI-3761	AI-3762
AI-3763	AI-3764	AI-3765
AI-3766	AI-3767	AI-3768
AI-3769	AI-3770	AI-3771
AI-3772	AI-3773	AI-3774
AI-3775	AI-3776	AI-3777
AI-3778	AI-3779	AI-3780
AI-3781	AI-3782	AI-3783
AI-3784	AI-3785	AI-3786
AI-3787	AI-3788	AI-3789
AI-3790	AI-3791	AI-3792
AI-3793	AI-3794	AI-3795
AI-3796	AI-3797	AI-3798
AI-3799	AI-3800	AI-3801
AI-3802	AI-3803	AI-3804
AI-3805	AI-3806	AI-3807
AI-3808	AI-3809	AI-3810
AI-3811	AI-3812	AI-3813
AI-3814	AI-3815	AI-3816
AI-3817	AI-3818	AI-3819
AI-3820	AI-3821	AI-3822
AI-3823	AI-3824	AI-3825
AI-3826	AI-3827	AI-3828
AI-3829	AI-3830	AI-3831
AI-3832	AI-3833	AI-3834
AI-3835	AI-3836	AI-3837
AI-3838	AI-3839	AI-3840
AI-3841	AI-3842	AI-3843
AI-3844	AI-3845	AI-3846
AI-3847	AI-3848	AI-3849
AI-3850	AI-3851	AI-3852
AI-3853	AI-3854	AI-3855
AI-3856	AI-3857	AI-3858
AI-3859	AI-3860	AI-3861
AI-3862	AI-3863	AI-3864
AI-3865	AI-3866	AI-3867
AI-3868	AI-3869	AI-3870
AI-3871	AI-3872	AI-3873
AI-3874	AI-3875	AI-3876
AI-3877	AI-3878	AI-3879
AI-3880	AI-3881	AI-3882
AI-3883	AI-3884	AI-3885
AI-3886	AI-3887	AI-3888
AI-3889	AI-3890	AI-3891
AI-3892	AI-3893	AI-3894
AI-3895	AI-3896	AI-3897
AI-3898	AI-3899	AI-3900
AI-3901	AI-3902	AI-3903
AI-3904	AI-3905	AI-3906
AI-3907	AI-3908	AI-3909
AI-3910	AI-3911	AI-3912
AI-3913	AI-3914	AI-3915
AI-3916	AI-3917	AI-3918
AI-3919	AI-3920	AI-3921
AI-3922	AI-3923	AI-3924
AI-3925	AI-3926	AI-3927
AI-3928	AI-3929	AI-3930
AI-3931	AI-3932	AI-3933
AI-3934	AI-3935	AI-3936
AI-3937	AI-3938	AI-3939
AI-3940	AI-3941	AI-3942
AI-3943	AI-3944	AI-3945
AI-3946	AI-3947	AI-3948
AI-3949	AI-3950	AI-3951
AI-3952	AI-3953	AI-3954
AI-3955	AI-3956	AI-3957
AI-3958	AI-3959	AI-3960
AI-3961	AI-3962	AI-3963
AI-3964	AI-3965	AI-3966
AI-3967	AI-3968	AI-3969
AI-3970	AI-3971	AI-3972
AI-3973	AI-3974	AI-3975
AI-3976	AI-3977	AI-3978
AI-3979	AI-3980	AI-3981
AI-3982	AI-3983	AI-3984
AI-3985	AI-3986	AI-3987
AI-3988	AI-3989	AI-3990
AI-3991	AI-3992	AI-3993
AI-3994	AI-3995	AI-3996
AI-3997	AI-3998	AI-3999
AI-3999	AI-4000	AI-4001
AI-4002	AI-4003	AI-4004
AI-4005	AI-4006	AI-4007
AI-4008	AI-4009	AI-4010
AI-4011	AI-4012	AI-4013
AI-4014	AI-4015	AI-4016
AI-4017	AI-4018	AI-4019
AI-4020	AI-4021	AI-4022
AI-4023	AI-4024	AI-4025
AI-4026	AI-4027	AI-4028
AI-4029	AI-4030	AI-4031
AI-4032	AI-4033	AI-4034
AI-4035	AI-4036	AI-4037
AI-4038	AI-4039	AI-4040
AI-4041	AI-4042	AI-4043
AI-4044	AI-4045	AI-4046
AI-4047	AI-4048	AI-4049
AI-4050	AI-4051	AI-4052
AI-4053	AI-4054	AI-4055
AI-4056	AI-4057	AI-4058
AI-4059	AI-4060	AI-4061
AI-4062	AI-4063	AI-4064
AI-4065	AI-4066	AI-4067
AI-4068	AI-4069	AI-4070
AI-4071	AI-4072	AI-4073
AI-4074	AI-4075	AI-4076
AI-4077	AI-4078	AI-4079
AI-4080	AI-4081	AI-4082
AI-4083	AI-4084	AI-4085
AI-4086	AI-4087	AI-4088
AI-4089	AI-4090	AI-4091
AI-4092	AI-4093	AI-4094
AI-4095	AI-4096	AI-4097
AI-4098	AI-4099	AI-4100
AI-4101	AI-4102	AI-4103
AI-4104	AI-4105	AI-4106
AI-4107	AI-4108	AI-4109
AI-4110	AI-4111	AI-4112
AI-4113	AI-4114	AI-4115
AI-4116	AI-4117	AI-4118
AI-4119	AI-4120	AI-4121
AI-4122	AI-4123	AI-4124
AI-4125	AI-4126	AI-4127
AI-4128	AI-4129	AI-4130
AI-4131	AI-4132	AI-4133
AI-4134	AI-4135	AI-4136
AI-4137	AI-4138	AI-4139
AI-4140	AI-4141	AI-4142
AI-4143	AI-4144	AI-4145
AI-4146	AI-4147	AI-4148
AI-4149	AI-4150	AI-4151
AI-4152	AI-4153	AI-4154
AI-4155	AI-4156	AI-4157
AI-4158	AI-4159	AI-4160
AI-4161	AI-4162	AI-4163
AI-4164	AI-4165	AI-4166
AI-4167	AI-4168	AI-4169
AI-4170	AI-4171	AI-4172
AI-4173	AI-4174	AI-4175
AI-4176	AI-4177	AI-4178
AI-4179	AI-4180	AI-4181
AI-4182	AI-4183	AI-4184
AI-4185	AI-4186	AI-4187
AI-4188	AI-4189	AI-4190
AI-4191	AI-4192	AI-4193
AI-4194	AI-4195	AI-4196
AI-4197	AI-4198	AI-4199
AI-4199	AI-4200	AI-4201
AI-4202	AI-4203	AI-4204
AI-4205	AI-4206	AI-4207
AI-4208	AI-4209	AI-4210
AI-4211	AI-4212	AI-4213
AI-4214	AI-4215	AI-4216
AI-4217	AI-4218	AI-4219
AI-4220	AI-4221	AI-4222
AI-4223	AI-4224	AI-4225
AI-4226	AI-4227	AI-4228
AI-4229	AI-4230	AI-4231
AI-4232	AI-4233	AI-4234
AI-4235	AI-4236	AI-4237
AI-4238	AI-4239	AI-4240
AI-4241	AI-4242	AI-4243
AI-4244	AI-4245	AI-4246
AI-4247	AI-4248	AI-4249
AI-4250	AI-4251	AI-4252
AI-4253	AI-4254	AI-4255
AI-4256	AI-4257	AI-4258
AI-4259	AI-4260	AI-4261
AI-4262	AI-4263	AI-4264
AI-4265	AI-4266	AI-4267
AI-4268	AI-4269	AI-4270
AI-4271	AI-4272	AI-4273
AI-4274	AI-4275	AI-4276
AI-4277	AI-4278	AI-4279
AI-4280	AI-4281	AI-4282
AI-4283	AI-4284	AI-4285
AI-4286	AI-4287	AI-4288
AI-4289	AI-4290	AI-4291
AI-4292	AI-4293	AI-4294
AI-4295	AI-4296	AI-4297
AI-4298	AI-4299	AI-4300
AI-4301	AI-4302	AI-4303
AI-4304	AI-4305	AI-4306</

CHARACTERISTICS


Ambient temperature	-10 ÷ +90 °C
Fluid	50 µm filtered air, with or without lubrication
Commutation system	poppet
Max pressure	10 bar
Connections	M5, tube Ø4
Nominal bore (mm)	2,5
Nominal flow rate (NI/min)	70
Valve body	zamak
Seals	NBR
Spool	nickel-plated brass


Ball push - spring


■ Tube Ø4




■ M5


Roller lever - spring


■ Tube Ø4




■ M5


One-way roller lever - spring

■ Tube Ø4




■ M5




Bulkhead mechanical push button - spring

■ Tube Ø4




■ M5




Button lever - spring

■ Tube Ø4




■ M5




Mechanical push button for panel operation - spring

■ Tube Ø4



■ M5



AI-3511Q ■	AI-3514Q ■	AI-3515Q ■	AI-3520Q ■	AI-3524Q ■	AI-3522Q ■	AI-3525Q ■	AI-3526Q ■
AI-3512Q ■	AI-3516Q ■	AI-3517Q ■	AI-3521Q ■			AI-3523Q ■	
AI-3513Q ■	AI-3514QD ■	AI-3519Q ■					AI-3516QD ■


CHARACTERISTICS

Ambient temperature	-10 ÷ +90 °C
Fluid	50 µm filtered air, with or without lubrication
Commutation system	poppet
Max pressure	10 bar
Connections	M5, tube Ø4
Nominal bore (mm)	2,5
Nominal flow rate (NI/min)	70
Valve body	zamak
Seals	NBR
Spool	nickel-plated brass






Mechanical push button for panel mounting

■ Tube Ø4



■ M5

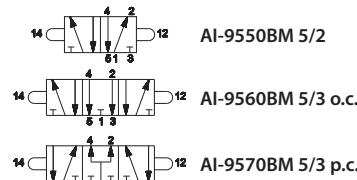

o.c. = open centres p.c. = pressurized centres

Recessed button	Protruding button	Two-position head button	Short lever selector	Long lever selector	Key selector
AI-35B10N ■ AI-35B10R ■ AI-35B10V ■	AI-35B11N ■ AI-35B11R ■ AI-35B11V ■	AI-35B13N ■ AI-35B13R ■	AI-35B20 2 steady positions AI-35B21 3 unsteady positions AI-35B22 3 steady positions	AI-35B25 2 steady positions AI-35B26 3 unsteady positions AI-35B27 3 steady positions	AI-35B30 2 steady positions AI-35B31 3 unsteady positions AI-35B32 3 steady positions

CHARACTERISTICS

Ambient temperature	-10 ÷ +70 °C	
Fluid	filtered air 50 µm, with or without lubrication	
Commutation system	poppet	
Max pressure	10 bar	
Connections	G1/8	G1/4
Nominal bore (mm)	2,3	8
Nominal flow rate (NL/min)	98	800
PNEUMATIC FOOT VALVE:		
Valve body	zamak	
Foot valve lever	aluminium	
Pedal body and protection	plastic material with reinforcing steel plate	
Seals	oil and wear resistant compound	
Spool	aluminium	
SOLENOID FOOT VALVE		
Valve body, foot valve lever, protection	dielectric plastic material	



Pneumatic foot valve G1/4 with protection

	Spring return	Bistable	With safety control	
	AM-5000		AM-5003	
	AM-5001		AM-5004	
	AM-5002		AM-5005	
External operation - Spring return		External operation - bistable		
	AM-5021		AM-5031	
			External operation with safety control	
				AM-5041

Pneumatic foot valve G1/4 without protection

	Spring return	Bistable	
	AM-5000A		AM-5003A
	AM-5001A		AM-5004A

Pneumatic foot valve G1/8 with protection

	Spring return	Solenoid foot valve
	AM-5043	
	AM-5043B	

Version without protection available upon request

- AM-5050
No electrical microswitch
- AM-5051
Electrical microswitch
- AM-5052
Double electrical microswitch

HIGH FLOW RATE**310 NI/min** (UNIVER traditional spool technology)**COMPACT SIZE: 10 mm**

Highest reduction of overall dimensions

EASY INSTALLATION

All pneumatic connections on the same side

COMPLETE SOLUTION

Threaded body and body for sub-base mounting

5/2 - 5/3 - 3/2+3/2**1 w**
Standard**0,3 w**
Low consumption**P10F**

Electrical connection with external connector

Threaded ports (M5)



Integrated electrical connection


**P10B**

For sub-base (M5-M7-Tube 4)

Integrated electrical connection



Version with in-line connector

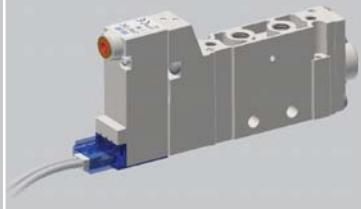
CANopen DeviceNet **PROFI® NET** **PROFI® BUS** **EtherNet/IP** **EtherCAT®**
TC Series

Connection to modular serial communication system



CHARACTERISTICS

Ambient temperature	-5 ÷ +50 °C
Fluid	10 µm filtered air, with or without lubrication
Commutation system	spool
Max pressure	9 bar (electrical control) * 10 bar (pneumatic control)
Connections	M5 (P10F) - M5, M7, tube Ø 4 (P10B)
Nominal flow rate (NI/min)	310 (5/2) 230 (5/3) 250 (3/2+3/2)
Valve body	zamak
Seals	NBR
Electropilot	B10 (0,3W) - B11 (1 W)
Spool	aluminium
Voltage	24 V DC (± 10%)
Power consumption	B10 = 0,3 W, Speed-up 1 W (25 ms) B11 = 1 W
Protection degree	IP65
Manual override	recessed button - 1 position



* = At pressure higher than 7bar with B10 pilot (0.3W) it is recommended to use solenoid valves with external pilot supply


CODIFICATION KEY

P	1	0	F	2	4	4	2	4	
1	2	3	4	5	6				


1 Series	2 Type	3 Control 14	4 Return 12
P10F = Threaded body	2 = 5/2	3 = Pneumatic amplified	0 = Pneumomechanical spring
P10B = Body for sub-base	3 = 5/3 c.c.	4 = Electrical amplified 90° (0,3W)	1 = Mechanical spring
	4 = 5/3 o.c.	5 = Electrical amplified 90° (1W)	3 = Pneumatic amplified
	5 = 5/3 p.c.		4 = Electrical amplified 90° (0,3W)
			6 = Electrical amplified 90° (1W)

5 Voltage	6 Option
24 = 24 V DC	D = External pilot supply on valve body (P10 = M3)


c.c. = closed centres o.c. = open centres p.c. = pressurized centres

Pneumatic impulse - Threaded connections M5
Single impulse



P10F230




P10F231

Double impulse



P10F233




P10F333




P10F433




P10F533



P10F633




P10F733



P10F833

Electrical impulse - Threaded connections M5

Single impulse



P10F24024 0,3 W

P10F26024 1 W

P10F24124 0,3 W

P10F26124 1 W

B10




Low power
consumption 0,3 W

NEW - B11



Standard 1 W

Double impulse



P10F24424 0,3 W

P10F26624 1 W

P10F34424 0,3 W


P10F36624 1 W

P10F44424 0,3 W

P10F46624 1 W


P10F54424 0,3 W

P10F56624 1 W




P10F64424 0,3 W

P10F66624 1 W



P10F74424 0,3 W

P10F76624 1 W




P10F84424 0,3 W

P10F86624 1 W

Integrated electrical connection




TIM1024




male connection module
25 poles, type sub-D

P10SF100




sub-base 1 place

P10SF110




sub-base 1 place
1-3-5 closed

P10SF200



sub-base 2 places

P10SF210




sub-base 2 places
1-3-5 closed

P10SF500



left supply plate G1/8
for TIM module

P10SF505



right supply plate G1/8

P10SF550




pressure separator

P10SF560




closing plate for unused
valve place

P10SF570




intermediate supply plate
for threaded version

P10SS14M**



bus connection card,
side 14
** = 04, 06, 08, 10, 12 places

P10SS12M**



bus connection card,
side 12
** = 04, 06, 08, 10, 12 places

P10STR01




modular tie-rods
1 valve place

P10STR02



modular tie-rods
2 valve places

P10STR05



modular tie-rods
5 valve places

AZ4-SN003A

No. 100 nuts M3 for tie-rods

AZ4-VN0310

No. 100 screws M3x10 for tie-rods

Electrical connection with external connector

3



P10SF300	P10SF310	P10SF400	P10SF410	P10SF515	P10SF550
sub-base 1 place	sub-base 1 place 1-3-5 closed	sub-base 2 places	sub-base 2 places 1-3-5 closed	right/left supply place G1/8	pressure separator
closing plate for unused valve place	intermediate supply plate for threaded version	modular tie-rods 1 valve place	modular tie-rods 2 valve places	modular tie-rods 5 valve places	

AZ4-SN003A


No. 100 nuts M3
for tie-rods

AZ4-VN0310


No. 100 screws M3x10
for tie-rods

Pneumatic impulse - Body for sub-base mounting

■ Single impulse




P10B230




P10B231


■ Double impulse



P10B233




P10B333



P10B433



P10B533

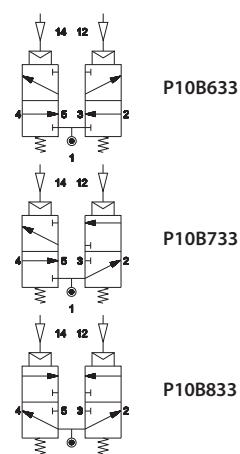


P10B633

P10B733

P10B833

Electrical impulse - Body for sub-base mounting

Single impulse



P10B24024 0,3 W

P10B26024 1 W

P10B24124 0,3 W

P10B26124 1 W

B10




Low power consumption 0,3 W

NEW - B11




Standard 1 W

Double impulse




P10B24424 0,3 W

P10B26624 1 W




P10B34424 0,3 W

P10B36624 1 W




P10B44424 0,3 W

P10B46624 1 W




P10B54424 0,3 W

P10B56624 1 W




P10B64424 0,3 W

P10B66624 1 W



P10B74424 0,3 W

P10B76624 1 W




P10B84424 0,3 W

P10B86624 1 W

Integrated electrical connection




TIM1024




male connection module
25 poles, type sub-D

P10SB100/107




sub-base 1 place
side outlets M5, M7

P10SB110/117




sub-base 1 place
side outlets M5, M7
1-3-5 closed

P10SB200/207




sub-base 2 places
side outlets M5, M7

P10SB210/217




sub-base 2 places
side outlets M5, M7
1-3-5 closed

P10SB304




sub-base 1 place
side outlets with push-in
connections tube 4
1-3-5 closed

P10SB314




sub-base 1 place side
outlets with push-in
connections tube 4
1-3-5 closed

P10SB404




sub-base 2 places
side outlets with push-in
connections tube 4
1-3-5 closed

P10SB414




sub-base 2 places
side outlets with push-in
connections tube 4
1-3-5 closed

P10SB500



supply plate G1/8
for TIM module

P10SB505




right supply plate G1/8

P10SB550




pressure separator

P10SB560



closing plate for unused
valve place

P10SB570



intermediate supply
plate for sub-base
version

P10SS14**M	P10SS12**M	P10STR01	P10STR02	P10STR05	
					AZ4-SN003A No. 100 nuts M3 for tie-rods AZ4-VN0310 No. 100 screws M3x10 for tie-rods

Electrical connections


D-535U40300 D-535U40500	TSCFN24S000	TSCFN24S0300 TSCFN24S0500 TSCFN24S1000	TSCFN16D0300 TSCFN16D0500 TSCFN16D1000
single connector cable 3-5 m	female connector 25 poles, type sub-D, no cable M3x8 fixing screws	female connector 25 poles, type sub-D, prewired for 24 coils (3-5-10 m length) M3x8 fixing screws	sub-D male/female flying connector (upon request) prewired for 16 coils with cable Ø 8 mm (3-5-10 m length) suitable for dynamic laying - M3x8 fixing screws

■ TC series Serial Communication System



CHARACTERISTICS

Ambient temperature	-5 ÷ +50 °C
Fluid	10 µm filtered air, with or without lubrication
Commutation system	spool
Max pressure	9 bar (electrical control) * 10 bar (pneumatic control)
Connections	M5 (P10F) - M5, M7, tube Ø 4 (P10B)
Nominal flow rate (NL/min)	310 (5/2) 230 (5/3) 250 (3/2+3/2)
Valve body	zamak
Seals	NBR
Electropilot	B10 (0,3W) - B11 (1W)
Spool	aluminium
Voltage	24 V DC (± 10%)
Power consumption	B10 = 0,3 W, speed -up 1 W (25 ms) B11 = 1 W
Protection degree	IP65
Manual override	recessed button - 1 position

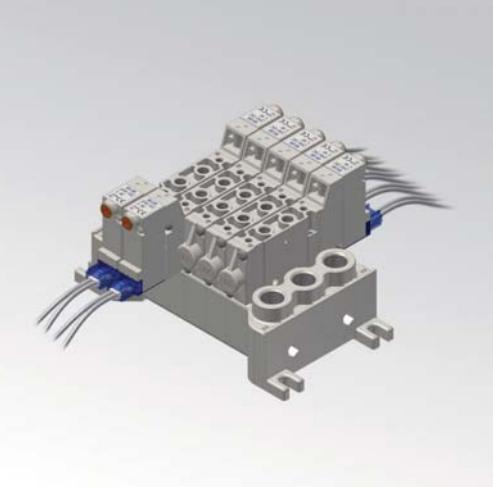

* = At pressure higher than 7bar with B10 pilot (0.3W) it is recommended to use solenoid valves with external pilot supply

CODIFICATION KEY

P	1	0	F	2	8	0	2	4	
1	2	3	4	5	6				

1 Series	2 Type	3 Control 14	4 Return 12
P10F = Threaded body	2 = 5/2	6 = 3/2+3/2 NC-NC	8 = Electrical amplified in-line (0,3W)
P10B = Body for sub-base	3 = 5/3 c.c.	7 = 3/2+3/2 NC-NO	9 = Electrical amplified in-line (1W)
	4 = 5/3 o.c.	8 = 3/2+3/2 NO-NO	
	5 = 5/3 p.c.		

5 Voltage	6 Option
24 = 24 V DC	D = External pilot supply on valve body (P10 = M3)

c.c. = closed centres o.c. = open centres p.c. = pressurized centres

Electrical impulse - Threaded connections M5

■ Single impulse


	 P10F28024 0,3 W P10F29024 1 W	 P10F28124 0,3 W P10F29124 1 W	B10 Low power consumption 0,3 W	NEW - B11 Standard 1 W
--	--	--	---	--------------------------------------

■ Double impulse

	 P10F28824 0,3 W P10F29924 1 W	 P10F38824 0,3 W P10F39924 1 W	 P10F48824 0,3 W P10F49924 1 W	 P10F58824 0,3 W P10F59924 1 W	 P10F68824 0,3 W P10F69924 1 W
	 P10F78824 0,3 W P10F79924 1 W	 P10F88824 0,3 W P10F89924 1 W			

Electrical connection with external connector


3

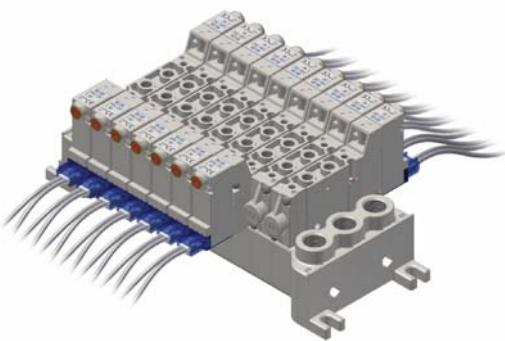

P10SF300	P10SF310	P10SF400	P10SF410	P10SF515	P10SF550
sub-base 1 place	sub-base 1 place 1-3-5 closed	sub-base 2 places	sub-base 2 places 1-3-5 closed	right/left supply plate G1/8	pressure separator
P10SF560	P10SF570	P10STR01	P10STR02	P10STR05	
closing plate for unused valve place	intermediate supply plate for threaded version	modular tie-rods 1 valve place	modular tie-rods 2 valve places	modular tie-rods 5 valve places	
					AZ4-SN003A No. 100 nuts M3 for tie-rods AZ4-VN0310 No. 100 screws M3x10 for tie-rods

Electrical impulse - Body for sub-base mounting

Single impulse

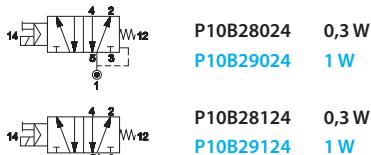

P10B28024 0,3 W

P10B29024 1 W

P10B28124 0,3 W

P10B29124 1 W

B10




Low power consumption 0,3 W

NEW - B11



Standard 1 W

Double impulse



P10B28824 0,3 W

P10B29924 1 W

P10B38824 0,3 W


P10B39924 1 W

P10B48824 0,3 W

P10B49924 1 W


P10B58824 0,3 W

P10B59924 1 W




P10B68824 0,3 W

P10B69924 1 W



P10B78824 0,3 W


P10B79924 1 W



P10B88824 0,3 W


P10B89924 1 W

Electrical connection with external connector

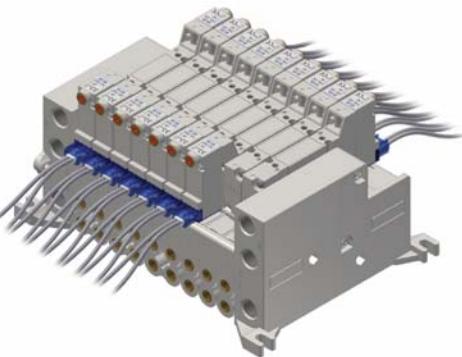

P10SB100/107	P10SB110/117	P10SB200/207	P10SB210/217	P10SB304	P10SB314
sub-base 1 place side outlets M5, M7	sub-base 1 place side outlets M5, M7 1-3-5 closed	sub-base 2 places side outlets M5, M7	sub-base 2 places side outlets M5, M7 1-3-5 closed	sub-base 1 place side outlets with push-in connections tube 4	sub-base 1 place side outlets with push-in connections tube 4 1-3-5 closed
P10SB404	P10SB414	P10SB502	P10SB505	P10SB550	P10SB560
sub-base 2 places side outlets with push-in connections tube 4 1-3-5 closed	sub-base 2 places side outlets with push-in connections tube 4 1-3-5 closed	supply plate G1/8	right supply plate G1/8	pressure separator	closing plate for unused valve place
P10SB570	P10STR01	P10STR02	P10STR05		
				AZ4-SN003A No. 100 nuts M3 for tie-rods	AZ4-VN0310 No. 100 screws M3x10 for tie-rods
intermediate supply plate for sub-base	modular tie-rods 1 valve place	modular tie-rods 2 valve places	modular tie-rods 5 valve places		

D-530-30/50/200



Miniature connector with loose cables

D-530-30 = wire length 300 mm

D-530-50 = wire length 500 mm

D-530-200 = wire length 2000 mm

HIGH FLOW RATE

800 NI/min (UNIVER traditional spool technology)

COMPACT SIZE: 15 mm


Highest reduction of overall dimensions

EASY INSTALLATION

All pneumatic connections on the same side

COMPLETE SOLUTION

Threaded body and body for sub-base mounting

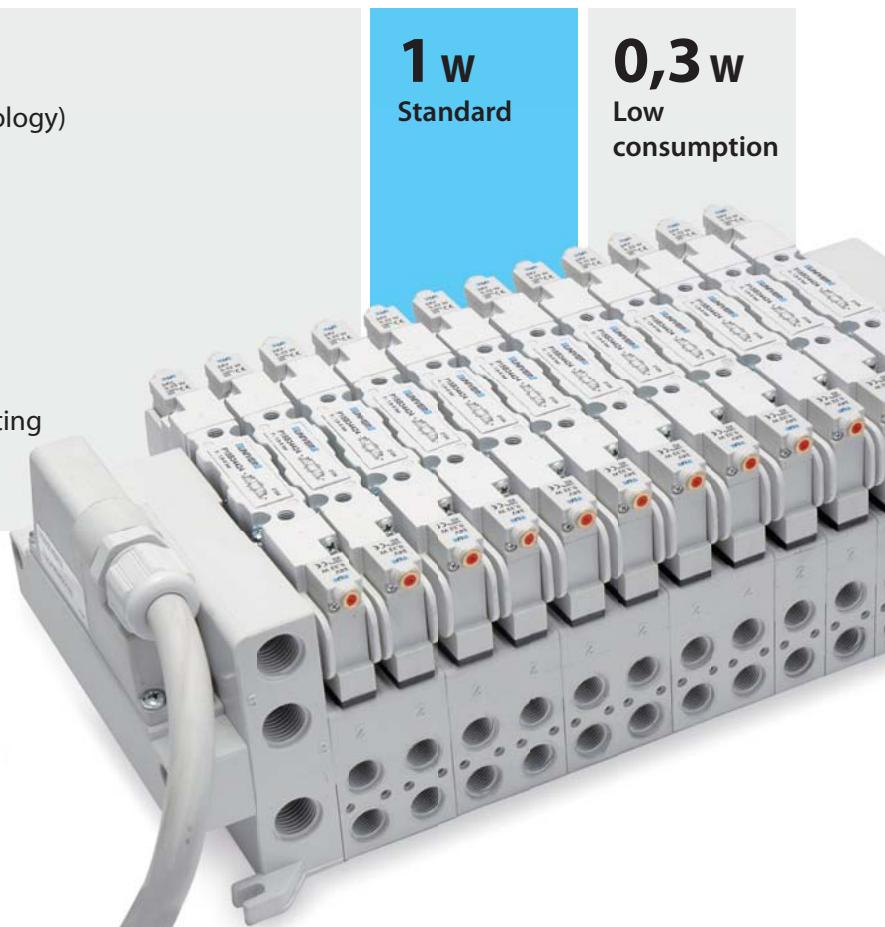5/2 - 5/3 - 3/2+3/2**1 w**
Standard**0,3 w**
Low consumption**P15F**


Electrical connection with external connector

**Threaded ports (G1/8)**


Integrated electrical connection

**P15B****For sub-base (G1/8 - Tube 4-6-8)**

Integrated electrical connection



Version with in-line connector


CANopen DeviceNet **PROFI® NET** **PROFI® BUS** **EtherNet/IP** **EtherCAT**
TC Series

Connection to modular serial communication system



CHARACTERISTICS

Ambient temperature	-5 ÷ 50 °C
Fluid	10 µm filtered air, with or without lubrication
Commutation system	spool
Max pressure	9 bar (electrical control) * 10 bar (pneumatic control)
Connections	G1/8 (P15F) - G1/8 - tube Ø 4-6-8 (P15B)
Nominal flow rate (NI/min)	800 (5/2) 720 (5/3) 720 (3/2+3/2)
Valve body	zamak
Seals	NBR
Spool	aluminium
Electropilot	B10 (0,3W) - B11 (1 W)
Voltage	24 V DC (± 10%)
Power consumption	B10 = 0,3 W, speed -up 1 W (25 ms) B11 = 1 W
Protection degree	IP65
Manual override	recessed button - 1 position



* = At pressure higher than 7bar with B10 pilot (0.3W) it is recommended to use solenoid valves with external pilot supply

CODIFICATION KEY

P	1	5	F	2	4	4	2	4	
1	2	3	4	5	6				

1 Series	2 Type	3 Control 14	4 Return 12
P15F = Threaded body	2 = 5/2	3 = Pneumatic amplified	0 = Pneumomechanical spring
P15B = Body for sub-base	3 = 5/3 c.c.	4 = Electrical amplified 90° (0,3W)	1 = Mechanical spring
P15D = Threaded body 15 mm connector	4 = 5/3 o.c. 5 = 5/3 p.c.	5 = 3/2+3/2 NC-NO 8 = 3/2+3/2 NO-NO	3 = Pneumatic amplified 4 = Electrical amplified 90° (1W) 6 = Electrical amplified 90° (0,3W) 6 = Electrical amplified 90° (1W)


5 Voltage

24 = 24 V DC


6 Option

D = External pilot supply on valve body (P15 = M5)


c.c. = closed centres o.c. = open centres p.c. = pressurized centres

Pneumatic impulse - Threaded connections G1/8
Single impulse



P15F230




P15F231

Double impulse



P15F233




P15F333




P15F433



P15F633




P15F733



P15F833


Electrical impulse - Threaded connections G1/8

■ Single impulse



P15F24024 0,3 W

P15F26024 1 W



P15F24124 0,3 W

P15F26124 1 W

B10




Low power consumption 0,3 W

■ NEW - B11




Standard 1 W

■ Double impulse




P15F24424 0,3 W

P15F26624 1 W




P15F34424 0,3 W

P15F36624 1 W




P15F44424 0,3 W

P15F46624 1 W




P15F54424 0,3 W

P15F56624 1 W




P15F64424 0,3 W

P15F66624 1 W



P15F74424 0,3 W

P15F76624 1 W




P15F84424 0,3 W

P15F86624 1 W


Electrical impulse - Threaded connections G1/8 - 15 mm connector

■ Single impulse



P15D24024 0,3 W


P15D26024 1 W



P15D24124 0,3 W


P15D26124 1 W

■ Double impulse




P15D24424 0,3 W

P15D26624 1 W




P15D34424 0,3 W

P15D36624 1 W




P15D44424 0,3 W

P15D46624 1 W




P15D54424 0,3 W

P15D56624 1 W




P15D64424 0,3 W

P15D66624 1 W



P15D74424 0,3 W

P15D76624 1 W



P15D84424 0,3 W

P15D86624 1 W

Integrated electrical connection


TIM1524	TIM151806	TIM1536	P15SF100	P15SF110	P15SF200	P15SF210
male connection module 25 poles 12+12 coils type sub-D	male connection module 25 poles 18 coils, side 14 6 coils, side 12 type sub-D	male connection module 37 poles 16+16 coils type sub-D	sub-base 1 place	sub-base 1 place 1-3-5 closed	sub-base 2 places	sub-base 2 places 1-3-5 closed
P15SF500	P15SF505	P15SF550	P15SF560	P15SF570	P15SS**..M	
					male bus connection card, ** = side 14 or 12 .. = 04, 06, 08 places	
left supply plate G1/4 for TIM module	right supply plate G1/4	pressure separator	closing plate for unused valve place	intermediate supply plate for threaded version	male bus connection card, ** = side 14 or 12 .. = 04, 06, 08 places	
P15SS**08MF	P15SS**04MFP	P15SS**04MP	P15STR01	P15STR02	P15STR05	
male/female bus connection card ** = side 14 or 12 8 places	male/female bus connection card extension ** = side 14 o 12 4 places	bus card extension ** = side 14 o 12 4 places	modular tie-rods 1 valve place	modular tie-rods 2 valve places	modular tie-rods 5 valve places	
AZ4-SN004A No. 100 nuts M4 for tie-rods	AZ4-VN0414 No. 100 screws M4x14 for tie-rods					

Electrical connection with external connector

P15SF300	P15SF310	P15SF400	P15SF410	P15SF515	P15SF550	P15SF560
sub-base 1 place	sub-base 1 place 1-3-5 closed	sub-base 2 places	sub-base 2 places 1-3-5 closed	right/left supply plate G1/4	pressure separator	closing plate for unused valve place
P15SF570	P15STR01	P15STR02	P15STR05			
intermediate supply plate for threaded version	modular tie-rods 1 valve place	modular tie-rods 2 valve places	modular tie-rods 5 valve places			
AZ4-SN004A No. 100 nuts M4 for tie-rods	AZ4-VN0414 No. 100 screws M4x14 for tie-rods					

Pneumatic impulse - Body for sub-base mounting

■ Single impulse




P15B230



P15B231


■ Double impulse




P15B233




P15B333




P15B433




P15B533



P15B633




P15B733



P15B833


Electrical impulse - Body for sub-base mounting

■ Single impulse



P15B24024 0,3 W

P15B26024 1 W



P15B24124 0,3 W

P15B26124 1 W

B10




Low power consumption 0,3 W

■ NEW - B11




Standard 1 W

■ Double impulse




P15B24424 0,3 W

P15B26624 1 W




P15B64424 0,3 W

P15B66624 1 W




P15B34424 0,3 W

P15B36624 1 W




P15B74424 0,3 W

P15B76624 1 W




P15B44424 0,3 W

P15B46624 1 W



P15B84424 0,3 W

P15B86624 1 W



P15B54424 0,3 W

P15B56624 1 W

Integrated electrical connection




TIM1524	TIM151806	TIM1536	P15SB100	P15SB110	P15SB200	P15SB210
male connection module 25 poles 12+12 coils type sub-D	male connection module 25 poles 18 coils side 14 6 coils side 12 type sub-D	male connection module 37 poles 16+16 coils type sub-D	sub-base 1 place side outlets G1/8	sub-base 1 place side outlets G1/8 1-3-5 closed	sub-base 2 places side outlets G1/8	sub-base 2 places side outlets G1/8 1-3-5 closed
P15SB300	P15SB310	P15SB400	P15SB410	P15SB500	P15SB505	P15SB550
sub-base 1 place side outlets for push-in fittings	sub-base 1 place side outlets for push-in fittings 1-3-5 closed	sub-base 2 places side outlets for push-in fittings	sub-base 2 places side outlets for push-in fittings 1-3-5 closed	supply plate G1/4 for TIM module	right supply plate G1/4	pressure separator
P15SB560	P15SB570	P15SS**..M	P15SS**08MF	P15SS**04MFP	P15SS**04MP	
closing plate for unused valve place	intermediate supply plate for sub-base	male bus connection card ** = side 14 or 12 .. = 04, 06, 08 places	male/female bus connection card ** = side 14 or 12 8 places	male/female bus connection card extension ** = side 14 or 12 4 places	bus card connection extension ** = side 14 or 12 4 places	
P15STR01	P15STR02	P15STR05	GZR-V10004/06/08	AZ4-SN004A	AZ4-VN0414	
				No. 100 nuts M4 for tie-rods	No. 100 screws M4x14 for tie-rods	
modular tie-rods 1 valve place	modular tie-rods 2 valve places	modular tie-rods 5 valve places	straight fitting GZR-V10004 = tube Ø4 mm GZR-V10006 = tube Ø6 mm GZR-V10008 = tube Ø8 mm	AZ4-SN004A	AZ4-VN0414	

Electrical connections

D-535U40300 D-535U40500	AM-5109	TSCFN24S000 TSCFN36S000		TSCFN24S0300 TSCFN24S0500 TSCFN24S1000 TSCFN32S0300 TSCFN32S0500 TSCFN32S1000	TSCFN16D0300 TSCFN16D0500 TSCFN16D1000
single connector with cable 3-5 m	15 mm connector	female connector 25/37 poles, type sub-D, no cable M3x8 fixing screws	female connector 25/37 poles, type sub-D with cable 3-5-10 m M3x8 fixing screws	sub-D male/female flying connector prewired for 16 coils with cable Ø 8 mm (3-5-10 m length) suitable for dynamic laying M3x8 fixing screws	

CHARACTERISTICS

Ambient temperature	-5 ÷ 50 °C
Fluid	10 µm filtered air, with or without lubrication
Commutation system	spool
Max pressure	9 bar (electrical control) * 10 bar (pneumatic control)
Connections	G1/8 (P15F) - G1/8 - tube Ø 4-6-8 (P15B)
Nominal flow rate (NI/min)	800 (5/2) 720 (5/3) 720 (3/2+3/2)
Valve body	zamak
Seals	NBR
Spool	aluminium
Electropilot	B10 (0,3W) - B11 (1 W)
Voltage	24 V DC (± 10%)
Power consumption	B10 = 0,3 W, speed-up 1 W (25 ms) B11 = 1 W
Protection degree	IP65
Manual override	recessed button - 1 position

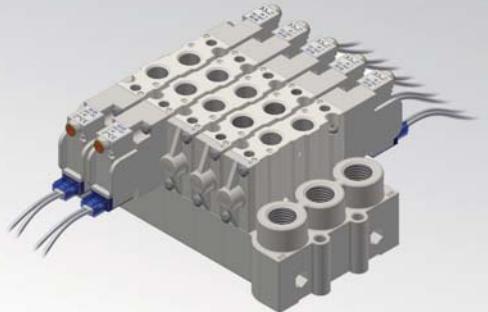

* = At pressure higher than 7bar with B10 pilot (0.3W) it is recommended to use solenoid valves with external pilot supply

CODIFICATION KEY

P	1	5	F	2	8	0	2	4	
1	2	3	4	5	6				

1 Series	2 Type	3 Control 14	4 Return 12
P15F = Threaded body	2 = 5/2	6 = 3/2+3/2 NC-NC	8 = Electrical amplified in-line (0,3W)
P15B = Body for sub-base	3 = 5/3 c.c.	7 = 3/2+3/2 NC-NO	9 = Electrical amplified in-line (1W)
	4 = 5/3 o.c.	8 = 3/2+3/2 NO-NO	
	5 = 5/3 p.c.		


5 Voltage

24 = 24 V DC

6 Option

D = External pilot supply on valve body (P15 = M5)



c.c. = closed centres o.c. = open centres p.c. = pressurized centres

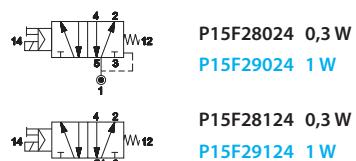Electrical impulse - Threaded connections G1/8
Single impulse

B10



Low power consumption 0,3 W

NEW - B11

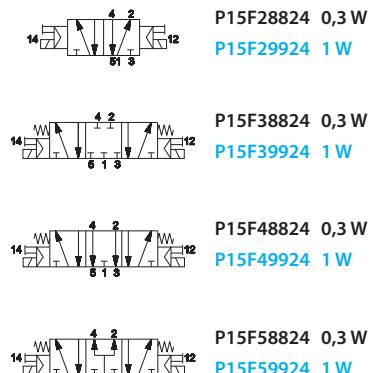

Standard 1 W

Double impulse


P15F68824 0,3 W
P15F69924 1 W



P15F78824 0,3 W
P15F79924 1 W



P15F88824 0,3 W
P15F89924 1 W



Electrical connection with external connector



P15SF300	P15SF310	P15SF400	P15SF410	P15SF515	P15SF550	P15SF560
sub-base 1 place	sub-base 1 place 1-3-5 closed	sub-base 2 places	sub-base 2 places 1-3-5 closed	right/left supply plate G1/4	pressure separator	closing plate for unused valve place
P15SF570	P15STR01	P15STR02	P15STR05			
				AZ4-SN004A No. 100 nuts M4 for tie-rods	AZ4-VN0414 No. 100 screws M4x14 for tie-rods	
intermediate supply plate for threaded version	modular tie-rods 1 valve place	modular tie-rods 2 valve places	modular tie-rods 5 valve places			

Electrical impulse - Body for sub-base mounting

Single impulse

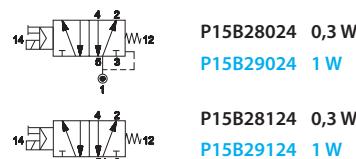

P15B28024 0,3 W

P15B29024 1 W

P15B28124 0,3 W

P15B29124 1 W

B10




NEW - B11



Low power
consumption 0,3 W

Standard 1 W

Double impulse

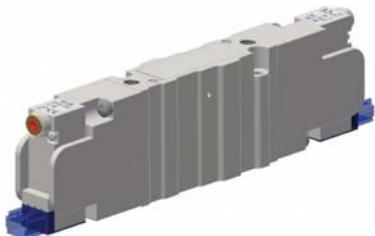

P15B28824 0,3 W


P15B29924 1 W

P15B38824 0,3 W

P15B39924 1 W


P15B48824 0,3 W

P15B49924 1 W




P15B68824 0,3 W

P15B69924 1 W



P15B78824 0,3 W

P15B79924 1 W




P15B88824 0,3 W

P15B89924 1 W

Electrical connection with external connector

3

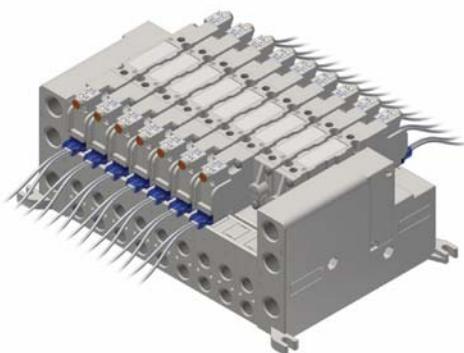

P15SB100	P15SB110	P15SB200	P15SB210	P15SB300	P15SB310	P15SB400
sub-base 1 place side outlets G1/8	sub-base 1 place side outlets G1/8 1-3-5 closed	sub-base 2 places side outlets G1/8	sub-base 2 places side outlets G1/8 1-3-5 closed	sub-base 1 place side outlets for GZR push-in fittings	sub-base 1 place side outlets for GZR push-in fittings 1-3-5 closed	sub-base 2 places side outlets for GZR push-in fittings
P15SB410	P15SB502	P15SB505	P15SB550	P15SB560	P15SB570	
sub-base 2 places side outlets for GZR push-in fittings 1-3-5 closed	left supply plate G1/4	right supply plate G1/4	pressure separator	closing plate for unused valve place	intermediate supply plate for sub-base	
P15STR01	P15STR02	P15STR05	GZR-V10004/06/08			
modular tie-rods 1 valve place	modular tie-rods 2 valve places	modular tie-rods 5 valve places	straight fitting GZR-V10004 = tube Ø4 mm GZR-V10006 = tube Ø6 mm GZR-V10008 = tube Ø8 mm			


AZ4-SN004A

No. 100 nuts M4 for tie-rods

AZ4-VN0414

No. 100 screws M4x14 for tie-rods

D-530-30/50/200



Miniature connector with loose cables
D-530-30 = cable length 300 mm
D-530-50 = cable length 500 mm
D-530-200 = cable length 2000 mm

HIGH FLOW RATE


Flow rate higher than **800 NL/min**

REDUCED DIMENSIONS

Body width 15 mm

COMPLETE SOLUTION

Versions available 5/2 - 5/3 - 3/2+3/2

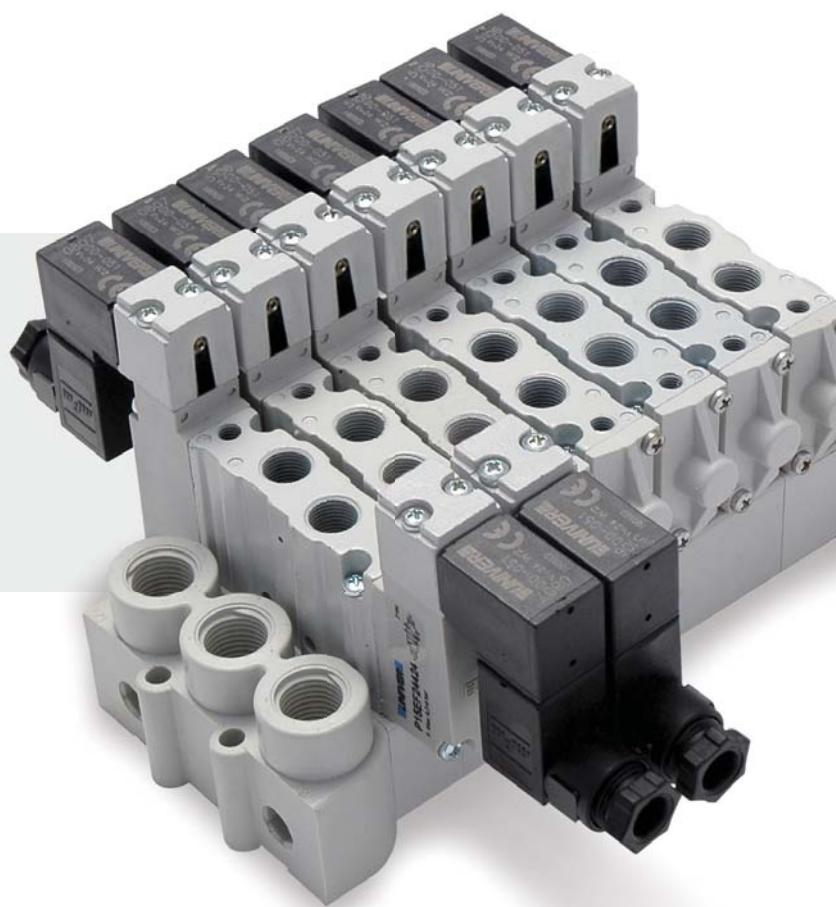

P15EF



P15EB



P15EF

Threaded ports (G1/8)



15 mm Electropilot - A series
UNIVER Original



Interchangeable coil - U05 type
90° x 90° revolvable
(12 - 24 V DC, 24 - 48 - 110 - 230 V AC)



Manual override (upon request)
Monostable + 2 positions



Sub-base mounting
Easy installation by means of 2 screws



Single mounting
Side holes on valve body

P15EB

For sub-base (G1/8 - Tube 4-6-8)



CHARACTERISTICS

Ambient temperature	-5 ÷ 50 °C
Fluid	10 µm filtered air, with or without lubrication
Commutation system	spool
Max pressure	9 bar
Connections	G1/8
Nominal flow rate (NL/min)	800 (5/2) 720 (5/3) 720 (3/2+3/2)
Valve body	zamak
Seals	NBR
Spool	aluminium
Electropilot	A series (15 mm)
Coil	U05 series
Voltage	12 V DC - 24 V DC - 24 V AC - 48 V AC - 110 V AC - 230 V AC
Power consumption	2 W (DC) 2,3 VA (AC)
Protection degree	IP65
Manual override	impulse screw - 1-2 positions



CODIFICATION KEY


P	1	5	E	F	2	5	5	2	4	
1			2	3	4		5		6	

1 Series	2 Type	3 Control 14
P15EF = COMPACT Valves - Threaded body G1/8 A series electropilot (15 mm)	2 = 5/2 6 = 3/2+3/2 NC-NC 3 = 5/3 c.c. 7 = 3/2+3/2 NC-NO 4 = 5/3 o.c. 8 = 3/2+3/2 NO-NO 5 = 5/3 p.c.	5 = Electrical amplified 15 mm
4 Return 12	5 Voltage	6 Option
0 = Pneumomechanical spring 1 = Mechanical spring 5 = Electrical amplified 15 mm	12 = 12 V DC 48 = 48 V AC 24 = 24 V DC 11 = 110 V AC 34 = 24 V AC 23 = 230 V AC	C = 2-position manual override (upon request) D = External pilot supply

c.c. = closed centres o.c. = open centres p.c. = pressurized centres

Electrical impulse - Threaded connection G1/8

Single impulse




P15EF250**




DIN C (8 mm)

For further information please contact our Sales Office


Double impulse




P15EF255**




P15EF355**




P15EF455**




P15EF555**



P15EF655**



P15EF755**



P15EF855**

** = Voltage 12 V DC - 24 V DC - 24 V AC - 48 V AC - 110 V AC - 230 V AC (Example: P15EF25024)

Solenoid valves are supplied with coils, without connectors

Electrical connection with external connector



P15SF300	P15SF310	P15SF400	P15SF410	P15SF515	P15SF550	P15SF560
sub-base 1 place	sub-base 1 place 1-3-5 closed	sub-base 2 places	sub-base 2 places 1-3-5 closed	right/left supply plate G1/4	pressure separator	closing plate for unused valve place
P15SF570	P15STR01	P15STR02	P15STR05			
					AZ4-SN004A No. 100 nuts M4 for tie-rods	
intermediate supply plate for threaded version	modular tie-rods 1 valve place	modular tie-rods 2 valve places	modular tie-rods 5 valve places		AZ4-VN0414 No. 100 screws M4x14 for tie-rods	


Pre-assembled sub-base



Part No.	Positions
P15SF499-02	2
P15SF499-03	3
P15SF499-04	4
P15SF499-05	5
P15SF499-06	6
P15SF499-07	7
P15SF499-08	8
P15SF499-09	9
P15SF499-10	10

Pre-assembled sub-bases include seals and screws for valve assembly

Electrical connections



15 mm connector

CHARACTERISTICS

Ambient temperature	-5 ÷ 50 °C
Fluid	10 µm filtered air, with or without lubrication
Commutation system	spool
Max pressure	9 bar
Connections	G1/8
Nominal flow rate (NL/min)	800 (5/2) 720 (5/3) 720 (3/2+3/2)
Valve body	zamak
Seals	NBR
Spool	aluminium
Electropilot	A series (15 mm)
Coil	U05 series
Voltage	12 V DC - 24 V DC - 24 V AC - 48 V AC - 110 V AC - 230 V AC
Power consumption	2 W (DC) 2,3 VA (AC)
Protection degree	IP65
Manual override	impulse screw - 1-2 positions



CODIFICATION KEY

P	1	5	E	B	2	5	5	2	4	
1					2	3	4		5	6

1 Series

P15EB = COMPACT Valves for sub-base mounting
A series electropilot (15 mm)

2 Type

2 = 5/2	6 = 3/2+3/2 NC-NC
3 = 5/3 c.c.	7 = 3/2+3/2 NC-NO
4 = 5/3 o.c.	8 = 3/2+3/2 NO-NO
5 = 5/3 p.c.	

3 Control 14

5 = Electrical amplified 15 mm

4 Return 12

0 = Pneumomechanical spring
1 = Mechanical spring
5 = Electrical amplified 15 mm

5 Voltage

12 = 12 V DC	48 = 48 V AC
24 = 24 V DC	11 = 110 V AC
54 = 24 V AC	23 = 230 V AC


6 Variant

C = 2-position manual override (upon request)
D = External pilot supply

c.c. = closed centres o.c. = open centres p.c. = pressurized centres

Electrical impulse - Body for sub-base mounting - 15 mm connector

Single impulse




P15EB250**




DIN C (8 mm)

For further information please contact our Sales Office


Double impulse




P15EB255**




P15EB355**




P15EB455**




P15EB555**



P15EB655**



P15EB755**



P15EB855**

** = Voltage 12 V DC - 24 V DC - 24 V AC - 48 V AC - 110 V AC - 230 V AC (Example: P15EB25024)


Solenoid valves are supplied with coils, without connectors

Electrical connection with external connector



P15SB100	P15SB110	P15SB200	P15SB210	P15SB300	P15SB310	P15SB400
sub-base 1 place side outlets G1/8	sub-base 1 place side outlets G1/8 1-3-5 closed	sub-base 2 places side outlets G1/8	sub-base 2 places side outlets G1/8 1-3-5 closed	sub-base 1 place side outlets for GZR push-in fittings	sub-base 1 place side outlets for GZR push-in fittings 1-3-5 closed	sub-base 2 places side outlets for GZR push-in fittings
P15SB410	P15SB502	P15SB505	P15SB550	P15SB560	P15SB570	
sub-base 2 places side outlets for GZR push-in fittings 1-3-5 closed	left supply plate G1/4	right supply plate G1/4	pressure separator	closing plate for unused valve place	intermediate supply plate for sub-base	
P15STR01	P15STR02	P15STR05	GZR-V10004/06/08			
				AZ4-SN004A No. 100 nuts M4 for tie-rods	AZ4-VN0414 No. 100 screws M4x14 for tie-rods	
modular tie-rods 1 valve place	modular tie-rods 2 valve places	modular tie-rods 5 valve places	straight fitting GZR-V10004 = tube Ø4 mm GZR-V10006 = tube Ø6 mm GZR-V10008 = tube Ø8 mm			


Pre-assembled sub-base



Part No.	Positions
P15SB499-02	2
P15SB499-03	3
P15SB499-04	4
P15SB499-05	5
P15SB499-06	6
P15SB499-07	7
P15SB499-08	8
P15SB499-09	9
P15SB499-10	10

Pre-assembled sub-bases include seals and screws for valve assembly


Electrical connections



15 mm connector

CHARACTERISTICS

Controlled devices	Manifolds, Digital input M12/M8, Output M12
Handling capacity	Max 64 inputs + 64 outputs (PROFIBUS-DP, CANopen, DeviceNet) Max 64 inputs + 88 outputs (PROFINET, EtherNet/IP, EtherCAT)
Integrated configuration	BD series (VDMA) 18 - 26 mm P10 - P15 series (COMPACT)
Distributed configuration	Remote expansion modules for valve manifolds with sub-D 25 plug-in
FieldBus protocols	CANopen, DeviceNet, PROFINET, PROFIBUS-DP, EtherNet/IP, EtherCAT

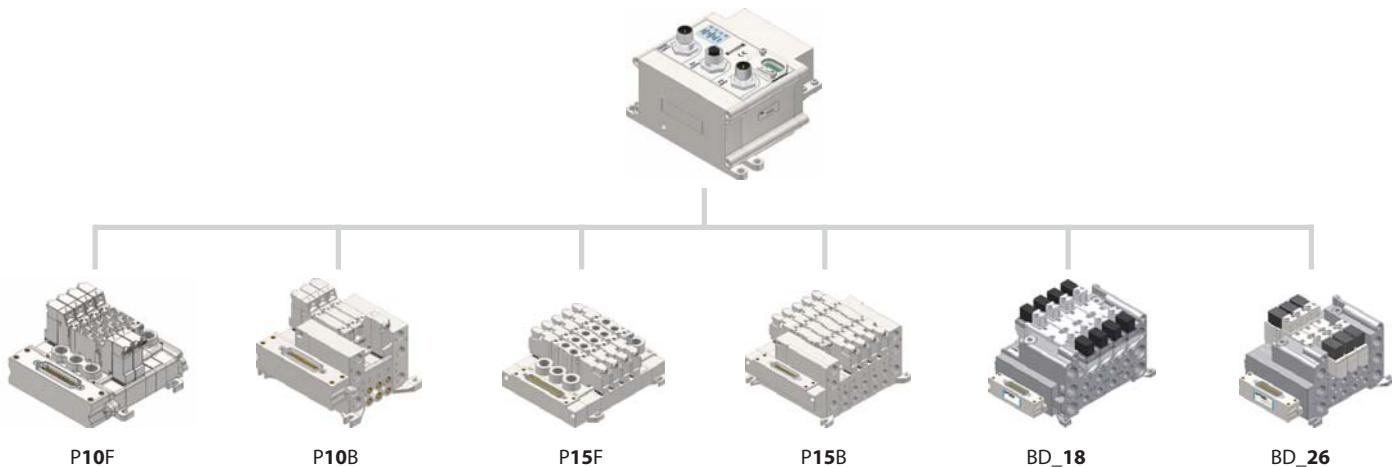
Serial module for all manifold models

Serial module

■ CANopen		■ PROFIBUS-DP	
	Part No. TCXC	Part No. TCXP	
Auxiliary power supply 1 x M12 - 4 pins male		Auxiliary power supply 1 x M12 - 4 pins male	
Fieldbus 1 x M12 - 5 pins male		Fieldbus 1 x M12 - 4 pins male B code	
Connectors 1 x M12 - 5 pins female		Connectors 1 x M12 - 4 pins female B code	
Diagnostics Optical, Primary, Extended		Diagnostics Optical, Primary, Extended	
Capacity max I/O 64 In - 40 Out	24 coils	Capacity max I/O 64 In - 40 Out	24 coils
LSS Slave supported			
■ DeviceNet		■ EtherNet/IP	
	Part No. TCXD	Part No. TCXEN	
Auxiliary power supply 1 x 7/8" - 4 pins male		Auxiliary power supply 1 x M12 - 4 pins male	
Fieldbus 1 x 7/8" - 5 pins male		Fieldbus 2 x M12 - 4 pins female D code	
Connectors 1 x 7/8" - 5 pins female		Connectors	
Diagnostics Optical, Primary, Extended		Diagnostics Optical, Primary, Extended	
Capacity max I/O 64 In - 40 Out	24 coils	Capacity max I/O 64 In - 64 Out	24 coils
■ PROFINET		■ EtherCAT	
	Part No. TCXPN	Part No. TCXEC	
Auxiliary power supply 1 x M12 - 4 pins male		Auxiliary power supply 1 x M12 - 4 pins male	
Fieldbus 2 x M12 - 4 pins female		Fieldbus 2 x M12 - 4 pins female D code	
Connectors D code		Connectors	
Diagnostics Optical, Primary, Extended		Diagnostics Optical, Primary, Extended	
Capacity max I/O 64 In - 72 Out	24 coils	Capacity max I/O 64 In - 64 Out	24 coils

Configurable expansion modules

**TZ-F4M12**

CANopen, ProfiBus, ProfiNet
EtherNet/IP, EtherCat
Power Supply Connector M12
female 4 poles

TZ-F5M12

CanOpen
Input Bus M12
female 5 poles

TZ-M5M12/T

CanOpen
Output Bus M12
male 5 poles

TZ-F478

DeviceNet
Power Supply Connector 7/8
female 4 poles

TZ-F578

DeviceNet
Input Bus 7/8
female 5 poles

TZ-M578/T

TZ-M578
DeviceNet
Input Bus 7/8
male 5 poles

TZ-F5M12-B

ProfiBus
Input Bus M12
female 5 poles B-code

TZ-M4M12-B/BT

TZ-M4M12-B
ProfiBus
Output Bus M12
male 4 poles B-code


TZ-M4M12-D

ProfiNet, EtherNet/IP, EtherCat
Input/Output Bus M12
male 4 poles D-code

TSCFN16...

TSCFN16D0300
Prewired cable, sub-D, 25 poles,
16 signals 3 m
TSCFN16D0500
Prewired cable, sub-D 25 poles,
16 signals 5 m
TSCFN16D1000
Prewired cable, sub-D 25 poles,
16 signals 10 m

Assembly scheme

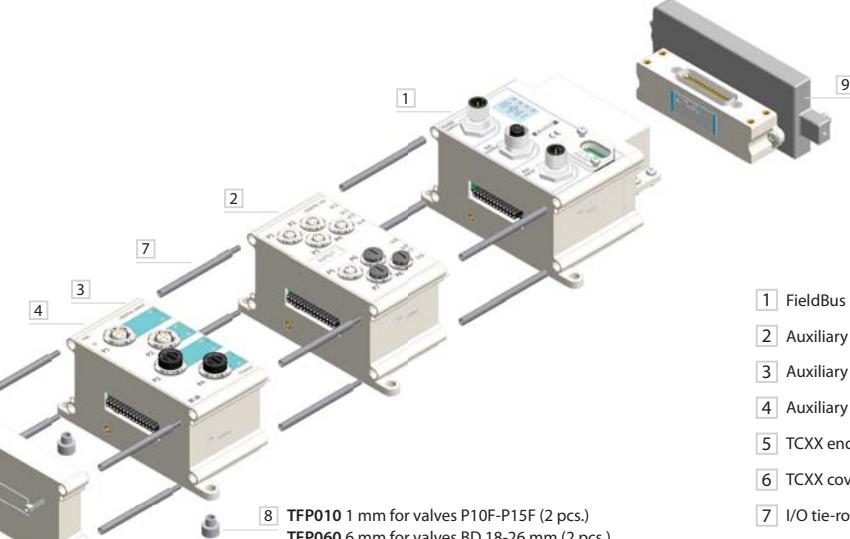

- [1] FieldBus Module
- [2] Auxiliary Module - Inputs 8 x M8
- [3] Auxiliary Module - Inputs 4 x M12
- [4] Auxiliary Module - Outputs 4 x M12
- [5] TCXX end cover included (1 pc)
- [6] TCXX cover screws included (4 pcs.)
- [7] I/O tie-rods included (4 pcs.)
- [8] Support foot for modules
- [9] Adaptor for 18-26 mm VDMA Manifold

MATCHING TABLE - COILS/ELECTROPILOTS - ELECTROPILOTS/SOLENOID VALVES		Electropilots						
		A (U05)	B (U04)	AA (U1)	AA (U3)		AB (U2)	
Coils	U04	10 mm						
	U05	15 mm	■					
	U1	22 mm		■				
	U2	30 mm			■		■	■
	U3	30 mm			■	■		
Solenoid valves	BE	ISO 1 - ISO 2 ISO 3 - ISO 4	■ (a)			■		R
	AE	ISO 1 - ISO 2			■	■		
	BD	ISO 01 26 mm ISO 02 18 mm	■					
	AC-N	Interface NAMUR			■	■		
	CL	G1/8			■	■		
	CM	G1/4			■	■		
	COMP A 2/4		■					
	G6	G1/8	■	■				
	GL6	sub-base						
	G7	G1/8	R		■	■		
	PS	tube Ø 4 tube Ø 6 tube Ø 8		■				
	AC	G1/8 - G1/4 G1/2			■	■		
	AF	G1/8 G1/4 - G3/8 G1/2 ÷ G1 G1 1/2			R	R		
	AG	G1/8 G1/4 ÷ G1 G1 1/2			■	■		
	P15E	G1/8	■					

■ = Standard

R = Upon request

(a) = Connector M12

10 mm U04 Coils for B series electropilots

■ With integrated 90° upward connector



DE-352 24 V DC 1,2 W
DE-452 24 V DC 1,35 W
(with led)

DE-355 24 V DC 0,5 W
NEW

■ With in-line connector



Connector:
D-500
D-530-...
D-535-...

DE-552 24 V DC 1,2 W
DE-652 24 V DC 1,35 W
(with led)

DE-555 24 V DC 0,5 W
NEW

Connector:
D-500
D-530-...
D-535-...

■ With loose cables (length 300 mm)



DE-052L030 24 V DC 1,2 W

■ With in-line connector with protecting cover for complete tightness



DE-642I 12 V DC 1,35 W
DE-652I 24 V DC 1,35 W
(with led)

DE-655I 24 V DC 0,5 W
NEW

Connector:
D-530C-100
D-530C-200

15 mm U05 Coils for A series electropilot

■ with integrated 90° upward connector ■ with integrated 90° downward connector ■ with in-line connector



DD-351 24 V DC 2 W

Connector:
D-500
D-530-...
D-535-...



DD-151 24 V DC 2 W

Connector:
D-500
D-530-...
D-535-...



DD-551 24 V DC 2 W

Connector:
D-500
D-530-...
D-535-...

■ with loose cables

DD-051L030 12 V DC 2 W
DD-052L030 24 V DC 2,5 W

■ 15 mm - Faston

DD-013 230 V AC 50/60 Hz 3,5 VA
DD-040 24 V AC 50/60 Hz 2,3 VA
DD-041 12 V DC 2 W
DD-042 12 V DC 2,5 W
DD-050 48 V AC 50/60 Hz 2,3 VA

Connector:
AM-5109

DD-051 24 V DC 2 W
DD-052 24 V DC 2,5 W
DD-060 110 V AC 50/60 Hz 2,3 VA
DD-070 230 V AC 50/60 Hz 2,3 VA

U1 - U2 - U3 Coil

■ 22 mm (U1)



DA-0050 12 V DC 3,5 W
DA-0051 24 V DC 3,5 W
DA-0106 24 V AC 50/60 Hz 5 VA
DA-0108 110 V AC 50/60 Hz 5 VA
DA-0124 230 V AC 50/60 Hz 5 VA

■ 30 mm (U2)



DB-0501 12 V DC 11 W
DB-0502 24 V DC 11 W
DB-0507 24 V AC 50/60 Hz 10 VA
DB-0509 110 V AC 50/60 Hz 10 VA
DB-0510 230 V AC 50/60 Hz 10 VA

■ 30 mm (U3)



DC-0301 12 V DC 2,5 W
DC-0302 24 V DC 2,5 W
DC-0307 24 V AC 50/60 Hz 3,3 VA
DC-0309 110 V AC 50/60 Hz 3,3 VA
DC-0310 230 V AC 50/60 Hz 3,3 VA



U1-U2-U3 coils are certified in compliance with CSA regulation, certificate n. LR 113373-1.

For coils certified in compliance with UL regulation, please contact our Sales Office

Connectors

■ Miniature connector without wires



D-500

Coil:
U04/U05

■ Miniature connector with loose cables



D-530-30
D-530-50
D-530-200

Coil:
U04/U05

■ Miniature connector with cable



D-535-30
D-535-50
D-535-200

Coil:
U04/U05

■ 15 mm Connector



AM-5109

Coil:
U05

■ 20 mm Connector



AM-5110

Coil:
U1

■ 30 mm Connector




AM-5111

Coil:
U2/U3

Operator/button modularity

3

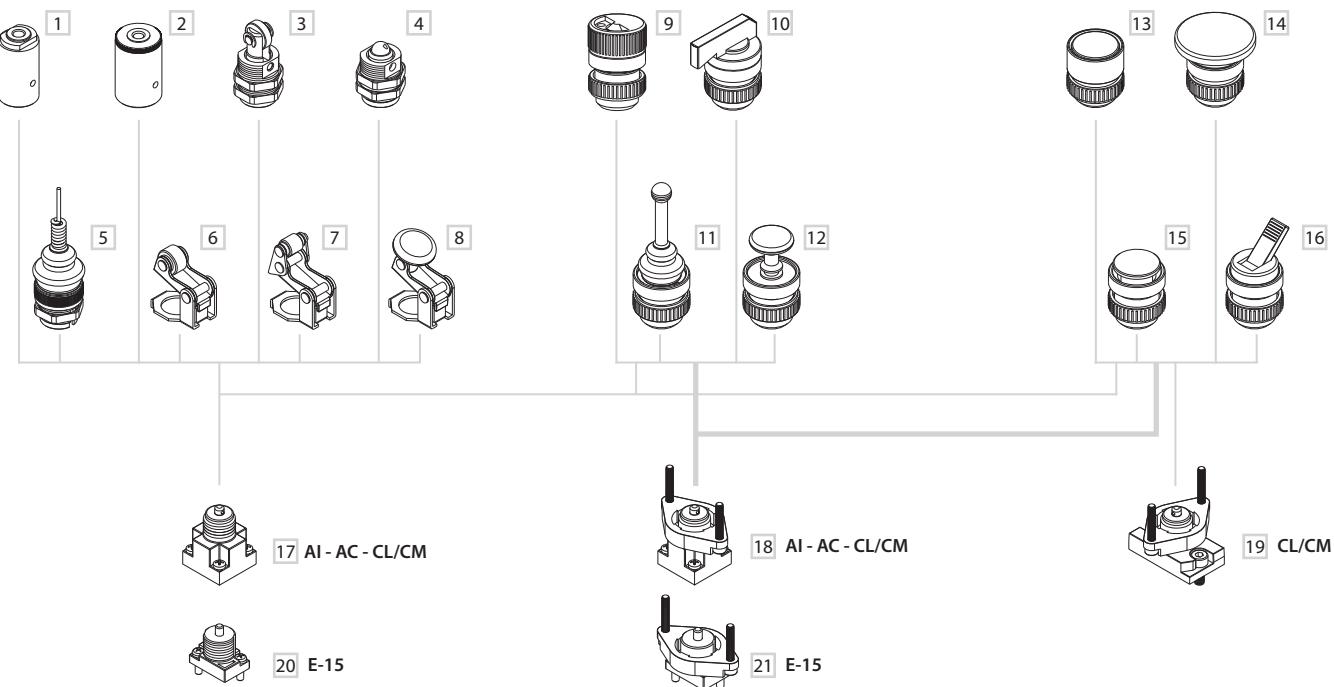

PNEUMATIC / MECHANICAL OPERATORS

- 1 Pneumatic operator
- 2 Amplified pneumatic operator
- 3 Roller operator 1 position
- 4 Ball-push operator 1 position
- 5 Omni-directional antenna 1 position
- 6 Roller lever operator 1 position
- 7 Articulated roller lever operator 1 position
- 8 Key operator 1 position

MANUAL OPERATORS

- 9 Rotating selector
- 10 Rotating lever selector
- 11 Omni-directional operator
- 12 Push-pull operator
- 13 Recessed button
- 14 Head button
- 15 Button
- 16 Lever

OVERRIDE

- 17 Threaded indirect operation
- 18 Indirect panel operation
- 19 Direct panel operation
- 20 Ball-push direct operation
- 21 Ball-push direct panel operation

Recessed button

Head button

- 1 Position
 - AI-3511 black ■
 - AI-3512 red ■
 - AI-3513 green ■
- For panel mounting 1 Position
 - AI-3511Q black ■
 - AI-3512Q red ■
 - AI-3513Q green ■

- 1 Position
 - AI-3514 red ■
 - AI-3516 black ■
- 2 Positions
 - AI-3514D red ■
 - AI-3516D black ■
- For panel mounting 1 Position
 - AI-3514Q red ■
 - AI-3516Q black ■
- For panel mounting 2 Positions
 - AI-3514QD red ■
 - AI-3516QD black ■

Button

Lever

- 1 Position
 - AI-3515 green ■
 - AI-3517 red ■
 - AI-3519 black ■
- For panel mounting 1 Position
 - AI-3515Q green ■
 - AI-3517Q red ■
 - AI-3519Q black ■

- 2 Positions
 - AI-3524 black ■
- For panel mounting 2 Positions
 - AI-3524Q black ■

Rotating selector for accident prevention



- With light 1 position
 AI-3521 black ■
- For panel mounting with light 1 position
 AI-3521Q black ■

- With light 2 positions
 AI-3520 black ■
- For panel mounting with light 2 positions
 AI-3520Q black ■

Rotating lever selector



- With light 1 position
 AI-3523 black ■
- For panel mounting with light 1 position
 AI-3523Q black ■

- With light 2 positions
 AI-3522 black ■
- For panel mounting with light 2 positions
 AI-3522Q black ■

Omni-directional lever



- With centre return 1 position
 AI-3525 black ■
- For panel mounting with centre return 1 position
 AI-3525Q black ■

Push-pull operator



- 2 positions
 AI-3526 black ■
- For panel mounting 2 positions
 AI-3526Q black ■

AI-3529



reducer for Ø 30,5 to Ø 22,5, to be used with AI-35..Q limit switches

Pneumatic and mechanical operators

- | | | | |
|--|--|--|---|
| ■ Pneumatic operator

⇒ - [] AI-3550 | ■ Roller operator with dust protection

◎ - [] AI-3560 | ■ Omni-directional antenna 1 position with centre return

→ - [] AI-3563 | ■ Roller lever 1 position

◎ - [] AI-3570 |
| ■ Amplified pneumatic operator

□ - [] AI-3551 | ■ Ball operator with dust protection

◎ - [] AI-3562 | | ■ Articulated one-way roller lever 1 position

◎ - [] AI-3571 |
| | | | ■ Push button 1 position

□ - [] AI-3572 |

YR240 Brass ball valve 2/2 with rotary actuator

■ Double/single acting



Temperature: -20 ÷ 120 °C

Fluid: air, water, etc.

Working pressure: Max 40 bar
(based on working temperature)

Double acting

Part No.	Ø	DN	Part No.	Ø	DN
YR240008DA	8	G1/4	YR240008SR	8	G1/4
YR240010DA	10	G3/8	YR240010SR	10	G3/8
YR240015DA	15	G1/2	YR240015SR	15	G1/2
YR240020DA	20	G3/4	YR240020SR	20	G3/4
YR240025DA	25	G1	YR240025SR	25	G1
YR240032DA	32	G1 1/4	YR240032SR	32	G1 1/4
YR240040DA	40	G1 1/2	YR240040SR	40	G1 1/2
YR240050DA	50	G2	YR240050SR	50	G2
YR240065DA	65	G2 1/2	YR240065SR	65	G2 1/2
YR240080DA	80	G3	YR240080SR	80	G3
YR240100DA	100	G4	YR240100SR	100	G4

YR250 Ball valve 2/2 AISI 316 with manual lever or rotary actuator

■ With manual lever



Part No.	Ø	DN
YR250008LM	8	G1/4
YR250010LM	10	G3/8
YR250015LM	15	G1/2
YR250020LM	20	G3/4
YR250025LM	25	G1
YR250032LM	32	G1 1/4
YR250040LM	40	G1 1/2
YR250050LM	50	G2
YR250065LM	65	G2 1/2
YR250080LM	80	G3

■ Double/single acting



Temperature: -25 ÷ 200 °C

Fluid: air, water, chemical agents, etc.

Working pressure: Max 63 bar
(based on working temperature)

Part No.	Ø	DN	Part No.	Ø	DN
YR250008DA	8	G1/4	YR250008SR	8	G1/4
YR250010DA	10	G3/8	YR250010SR	10	G3/8
YR250015DA	15	G1/2	YR250015SR	15	G1/2
YR250020DA	20	G3/4	YR250020SR	20	G3/4
YR250025DA	25	G1	YR250025SR	25	G1
YR250032DA	32	G1 1/4	YR250032SR	32	G1 1/4
YR250040DA	40	G1 1/2	YR250040SR	40	G1 1/2
YR250050DA	50	G2	YR250050SR	50	G2
YR250065DA	65	G2 1/2	YR250065SR	65	G2 1/2
YR250080DA	80	G3	YR250080SR	80	G3

YR260 Ball valve 2/2 AISI 316 (3 pieces) with manual lever or rotary actuator

■ With manual lever



Part No.	Ø	DN
YR260008LM	8	G1/4
YR260010LM	10	G3/8
YR260015LM	15	G1/2
YR260020LM	20	G3/4
YR260025LM	25	G1
YR260032LM	32	G1 1/4
YR260040LM	40	G1 1/2
YR260050LM	50	G2
YR260065LM	65	G2 1/2
YR260080LM	80	G3

■ Double/single acting



Temperature: -25 ÷ 200 °C

Fluid: air, water, chemical agents, etc.

Working pressure: Max 63 bar
(based on working temperature)

Part No.	Ø	DN	Part No.	Ø	DN
YR260008DA	8	G1/4	YR260008SR	8	G1/4
YR260010DA	10	G3/8	YR260010SR	10	G3/8
YR260015DA	15	G1/2	YR260015SR	15	G1/2
YR260020DA	20	G3/4	YR260020SR	20	G3/4
YR260025DA	25	G1	YR260025SR	25	G1
YR260032DA	32	G1 1/4	YR260032SR	32	G1 1/4
YR260040DA	40	G1 1/2	YR260040SR	40	G1 1/2
YR260050DA	50	G2	YR260050SR	50	G2
YR260065DA	65	G2 1/2	YR260065SR	65	G2 1/2
YR260080DA	80	G3	YR260080SR	80	G3

YR270 L-shaped ball valve 3/2 AISI 316 with manual lever or rotary actuator

With manual lever



Part. No	Ø	DN
YR270008LM	8	G1/4
YR270010LM	10	G3/8
YR270015LM	15	G1/2
YR270020LM	20	G3/4
YR270025LM	25	G1
YR270032LM	32	G1 1/4
YR270040LM	40	G1 1/2
YR270050LM	50	G2

Double/single acting



Temperature: -15 ÷ 230 °C
Fluid: air, water, chemical agents, etc.
Working pressure: Max 64 bar
 (based on working temperature)

Double acting			Single acting		
Part. No	Ø	DN	Part. No	Ø	DN
YR270008DA	8	G1/4	YR270008SR	8	G1/4
YR270010DA	10	G3/8	YR270010SR	10	G3/8
YR270015DA	15	G1/2	YR270015SR	15	G1/2
YR270020DA	20	G3/4	YR270020SR	20	G3/4
YR270025DA	25	G1	YR270025SR	25	G1
YR270032DA	32	G1 1/4	YR270032SR	32	G1 1/4
YR270040DA	40	G1 1/2	YR270040SR	40	G1 1/2
YR270050DA	50	G2	YR270050SR	50	G2

YR280 Brass L-shaped ball valve 3/2 with manual lever or rotary actuator

With manual lever



Part. No	Ø	DN
YR280008LM	8	G1/4
YR280010LM	10	G3/8
YR280015LM	15	G1/2
YR280020LM	20	G3/4
YR280025LM	25	G1
YR280032LM	32	G1 1/4
YR280040LM	40	G1 1/2
YR280050LM	50	G2

Double/single acting




Temperature: -20 ÷ 160 °C
Fluid: air, water, chemical agents, etc.
Working pressure: DN 1/4 "÷ DN 3/4" PN30
 DN 1" PN16 - DN 1"1/4÷DN 2" PN10

Double acting			Single acting		
Part. No	Ø	DN	Part. No	Ø	DN
YR280008DA	8	G1/4	YR280008SR	8	G1/4
YR280010DA	10	G3/8	YR280010SR	10	G3/8
YR280015DA	15	G1/2	YR280015SR	15	G1/2
YR280020DA	20	G3/4	YR280020SR	20	G3/4
YR280025DA	25	G1	YR280025SR	25	G1
YR280032DA	32	G1 1/4	YR280032SR	32	G1 1/4
YR280040DA	40	G1 1/2	YR280040SR	40	G1 1/2
YR280050DA	50	G2	YR280050SR	50	G2

Binary Counter (Flip Flop)

AP-500
 Electrical override




Working pressure: 10 bar

Energizing pressure: 1,5 bar

Ambient temperature: -30 ÷ +80 °C

Coil: U1 - DA series

AP-520
 Pneumatic override



Solenoid valves are supplied without coil/connector/locking nut

Flow control valve - metallic body

AM-50

One-way and two-way flow control valve
 M5 - G1/8 - G1/4 - G3/8 - G1/2




Ø mm

AM-5060	M5	1
AM-5061	G1/8	1
AM-5062	G1/8	2,25
AM-5063	G1/8	3,5
AM-5064	G1/4	5
AM-5065	G1/4	6
AM-5066	G3/8	6
AM-5067	G1/2	9
AM-5070	M5	1
AM-5071	G1/8	1
AM-5072	G1/8	2,25
AM-5074	G1/4	5
AM-5076	G3/8	6
AM-5077	G1/2	9

AM-50

One-way flow control valve G1/2 - G3/4 - G1




Ø mm

AM-5090	G1/2	9
AM-5091	G3/4	9
AM-5092	G1	12

Signal processing valve

AM-51


Two-pressure valve "AND"




AM-5160
 threaded body G1/8

AM-51


Selector valve "OR"




AM-5162
 threaded body G1/8



AM-5161
 push-in fittings Ø4x2



AM-5163
 push-in fittings Ø4x2



AM-5164
 threaded body G1/4


Gradual starter

AM-52

Gradual starter G1/8 ÷ G1




With manual regulation



		Ø mm
AM-5240	G1/8	6,5
AM-5241	G1/4	6,5
AM-5242	G1/4	9,5
AM-5243	G3/8	9,5


With electrical switch



		Ø mm
AM-5242E	G1/8	9,5
AM-5243E	G3/8	9,5




With manual regulation



		Ø mm
AM-5254	G1/2	15
AM-5255	G3/4	15
AM-5256	G1	24

With electrical switch




		Ø mm
AM-5259	G1/2	15
AM-5260	G3/4	15
AM-5261	G1	24

Economizer

AM-53

Economizer G1/8 ÷ G1



		Ø mm
AM-5350	G1/8	6,5
AM-5351	G1/4	6,5
AM-5352	G1/4	9,5
AM-5353	G3/8	9,5
AM-5354	G1/2	15
AM-5355	G3/4	15
AM-5356	G1	24

Check valve

AM-54

Check valve G1/2 - G3/4 - G1




2 →○→ 1

		Ø mm
AM-5400	G1/2	15
AM-5401	G3/4	15
AM-5402	G1	24

Blocking valve

AM-55

Blocking valve



		Ø mm
AM-5500	G1/8	6,5
AM-5501	G1/4	6,5
AM-5502	G1/4	9,5
AM-5503	G3/8	9,5
AM-5504	G1/2	15




		Ø mm
AM-5510	G1/8	6,5
AM-5511	G1/4	6,5
AM-5512	G1/4	9,5
AM-5513	G3/8	9,5
AM-5514	G1/2	15

Transducer and pressure switch

AM-5200


Pneumoelectrical transducer



AM-5200

AM-5220

Adjustable pressure switch



AM-5220

Digital pressure switch

■ HZ9N ...


Working temperature: 0 ÷ 60 °C

Voltage: 12 - 24 V DC

Repeatability: ≤ ± 2% F.S., ± 1 digit

Analog output: 1 ÷ 5 V 4 - 20 mA (upon request)

Connection: connector M8 and cable (upon request)

Part No.	Working pressure (bar)	Output	Min. adjustable unit (bar)	Cable length (m)	Thread
HZ9NC04	-1 +1	2xPNP	0,001	2 m	G1/8 - M5
HZ9NC02	-1 +1	2xNPN	0,001	2 m	G1/8 - M5
HZ9NP04	0 -10	2xPNP	0,01	2 m	G1/8 - M5
HZ9NP02	0 -10	2xNPN	0,01	2 m	G1/8 - M5

HZ9N1F



Adaptor for panel mounting + protection cover

HZ9N2F



Supports - 2 pcs

HZ9NM08-0200


 M8 Extensions
2 m Cable

Adjustable diaphragm pressure switch

■ HZ9N12


Max pressure: 80 bar

Max temperature: -10 ÷ 120 °C

Max voltage: 250 V AC

Max current: 0,5 A

Body: brass

Version with NC - NC/NO contact upon request

Part No.	Adjustable range (bar)	Tolerance 20° C (bar)	Contact	Thread
HZ9N12110060	1 - 10	± 0,5	NO	R1/8
HZ9N12110080	1 - 10	± 0,5	NO	R1/4
HZ9N12111060	0,1 - 1	± 0,1	NO	R1/8
HZ9N12111080	0,1 - 1	± 0,1	NO	R1/4

ATEX



ATEX version available

For further information please contact our Sales Office

HZ9N12A


 Protection cap
IP54

HZ9N12B


 Protection connector
IP65

HZ9N12C


 Protection connector
IP65 DIN

CHARACTERISTICS


Ambient temperature	-20 ÷ +50 °C
Fluid temperature	-10 ÷ +95 °C
Fluid	water, air, non-corrosive gases
Valve body	brass
Seals	NBR
Coil	U1 U2
Power consumption	see coil section
Voltage	24 V DC, 24 V AC, 110 V AC, 220 V AC 50/60 Hz

Other versions available upon request

- VITON, EPDM seals; EPM seals for food industry
- Nickel-plated brass or AISI 316 stainless steel body
- NO version
- G1 1/4 - G1 1/2 - G2



2 ways NC direct action



Part No.	Connections	Nom. bore (mm)	Pressure (bar)				Coil	KV (l/min)
			Nominal	Min	Max AC	Max DC		
YF210061D (a)	G1/8	2	25	0	12	10	U1	1,5
YF210062D (b)	G1/8	2	25	0	22	20	U2	1,7
YF210082D (b)	G1/4	3,5	100	0	10	8	U2	5,4

2 ways NC servo-assisted diaphragm



Part No.	Connections	Nom. bore (mm)	Pressure (bar)				Coil	KV (l/min)
			Nominal	Min	Max AC	Max DC		
YF210151S	G1/2	12,7	25	0,15	18	16	U1	40
YF210201S	G3/4	19	25	0,15	16	13	U1	90
YF210251S	G1	25	25	0,15	12	10	U1	176

3 ways NC direct action



Part No.	Connections	Nom. bore (mm)	Pressure (bar)				Coil	KV (l/min)
			Nominal	Min	Max AC	Max DC		
YF310061D (c)	G1/8	1,5	10	0	10	10	U1	1
YF310082D (d)	G1/4	2,4	10	0	10	10	U2	2,3

Coils

■ U1

YFDA-0224	24 V AC - 50/60 Hz - 8 VA
YFDA-0211	110 V AC - 50/60 Hz - 8 VA
YFDA-0223	230 V AC - 50/60 Hz - 8 VA
DA-0102	24 V DC - 6 W


■ U2

YFDB-0224	24 V AC - 50/60 Hz - 13 VA
YFDB-0211	110 V AC - 50/60 Hz - 13 VA
YFDB-0223	230 V AC - 50/60 Hz - 13 VA
DB-0502	24 V DC - 11 W

Solenoid valves are supplied with locking nut, without coil and connector

CHARACTERISTICS


Ambient temperature	-20 ÷ +50 °C
Fluid	50 µm filtered air, with or without lubrication
Pressure	1,5 ÷ 9 bar
Connections	G1/4
Pace regulators	embodied
Function	it allows cylinders to stop with highly precise position repeatability
Solenoid Valves	GL series
Commutation system	spool
Electropilot/Coil	A series/U05 series
Voltage	24 V DC - 12 V DC - 24 V AC - 110 V AC - 230 V AC (only version with external electrical connection)
Power consumption	U05 = 2 W (DC) 2,3 VA (AC)
Manual override	recessed button - 1 position

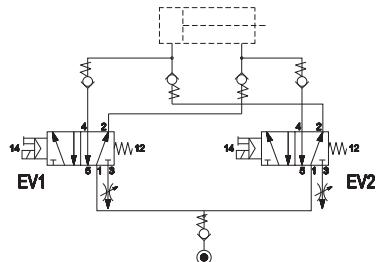
■ Embodied pace regulators


For further information please contact our Sales Office

DD- ...
AM-5109


15 mm U05 Coil - Faston



15 mm Connectors

4



Air Treatment



Air Treatment Units

HZE

3



Pressure Gauges

HZ9

10

Regulators and
Transducers

HZRP

HZRE

11

11



Microregulators

HZRM

12

MODULAR


40 mm (HZE0) 63 mm (HZE1) 80 mm (HZE2)

INTEGRATED GAUGE

Standard supplied

COMPLETE SOLUTION

Possibility of assembling combinations complete with accessories

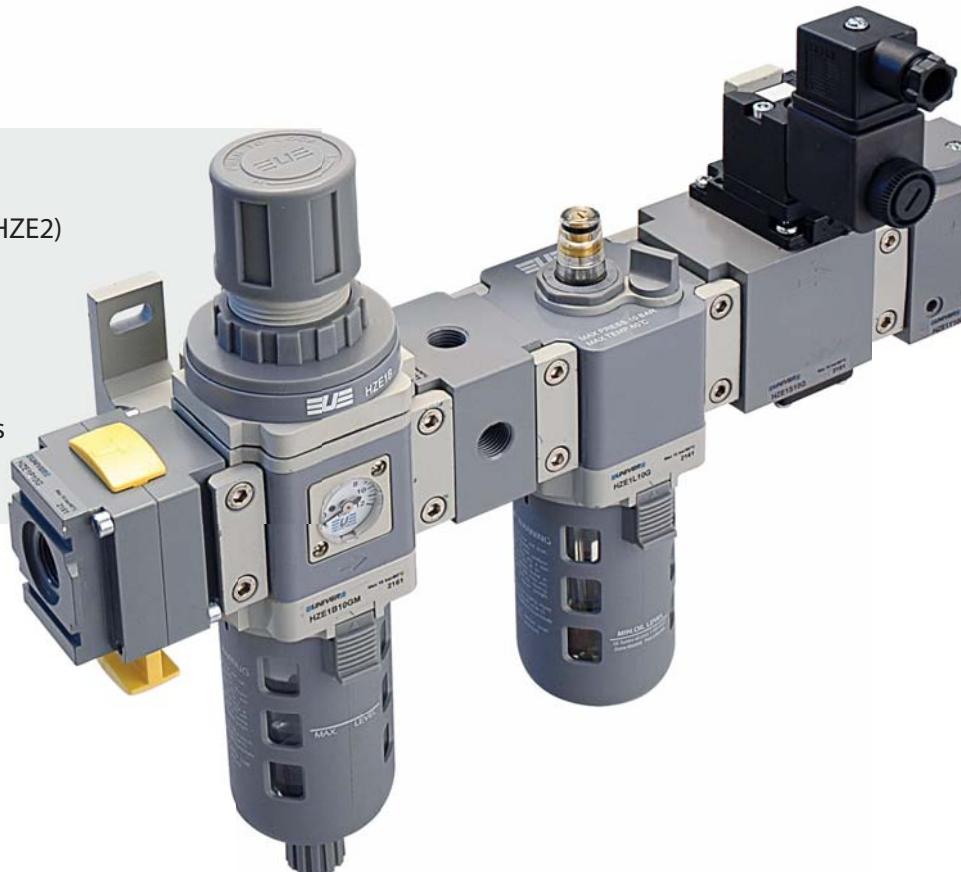

G1/4

Size 0



FR+L

600
NI/min

G3/8 - G1/2

Size 1



G1/2

Size 2



FR+L

2800
NI/min

4300
NI/min



HZE-Y
Gradual starter



HZE-N
Diverter block



HZE-P
Lockable valve



HZE-S
Shut-off valve



HZE-RL
Lockable regulator

CHARACTERISTICS

Ambient temperature	0 ÷ +60 °C
Fluid	filtered air, with or without lubrication
Working pressure	10 bar
Max pressure	15 bar
Size	0 - 1 - 2
Body	technopolymer with metal threaded elements (size 0) die-cast aluminium (size 1-2)
Knob	technopolymer
Ring nut	technopolymer
Bowl	polycarbonate
Bowl guard	technopolymer (size 1-2)
Filter element	polyethylene
Seals	NBR
Springs	steel
Diaphragm	fabric reinforced rubber

For round gauge mounting (HZ9P):

Size 0 = Replace HZ9464G gauge with HZE7Z480 square adaptor G1/8, to be ordered separately

Size 1-2 = Replace HZ9464G gauge with HZE7Z480 square adaptor G1/8 placed on the rear side of the regulator or filter regulator

CODIFICATION KEY

H	Z	E	0	B	0	8	G		M
1	2	3	4	5	6				

1 Series

HZE = Air treatment units with standard manual drain

2 Size

0 = Small (G1/4)
1 = Medium (G3/8 - G1/2)
2 = Large (G1/2)

3 Model

F = Filter
R = Regulator
L = Lubricator
B = Filter regulator
D = Filter regulator+Lubricator (FR+L)
C = Filter+Regulator+Lubricator (F+R+L)

4 Thread

08G = G1/4 (size 0)
10G = G3/8 (size 1)
15G = G1/2 (size 1-2)
20G = G3/4 (size 2) *
25G = G1 (size 2) *

5 Option

A = Automatic drain (except for size 0)
S = Semi-automatic drain

6 Pressure gauge

M = Integrated square pressure gauge (standard supplied)
 Square adaptor G1/8 upon request

* = with threaded ends

Filter



Size	0	1	2
Part No.	HZE0F08G	HZE1F10G	HZE1F15G
Connections	G1/4	G3/8	G1/2
Filtration rate (μm)	5	5	5
Nominal flow rate (NL/min) ^(A)	1100	3500	6500
Max inlet pressure (bar-MPa-psi)	10 - 1 - 145	10 - 1 - 145	10 - 1 - 145
Condensation drain capacity (cm^3)	12	45	80
Condensation drain	manual	manual	manual

(A) = Inlet pressure 7 bar, Δp 0,5 bar

Regulator

		
Size	0	1
Part No.	HZE0R08GM	HZE1R10GM
Connections	G1/4	G3/8
Nominal flow rate (NL/min) ^(A)	1000	2100
Max inlet pressure (bar-MPa-psi)	10 - 1 - 145	10 - 1 - 145
Pressure adjustment-relieving version (bar)	0,5 ÷ 8,5	0,5 ÷ 8,5
Pressure gauge (standard supplied)	HZ9464G	HZ9464G
Pressure gauge adaptor	G1/8^(B)	G1/8^(C)
(A) = Inlet pressure 7 bar, outlet pressure 5 bar - Δp 1 bar		
(B) = Upon request (replace HZ9464G gauge with HZE7Z480 square adaptor G1/8, to be ordered separately)		
(C) = Standard supplied (replace HZ9464G gauge with HZE7Z480 square adaptor G1/8 placed on the rear side)		

Other available versions

■ Without manometer size 0



Size	Part No.
0	HZE0R08G


■ Lockable knob size 1-2



Size	Part No.
1	HZE1RL10GM - HZE1RL15GM
2	HZE2RL15GM

■ Check valve size 0-1-2

The check valve inside the regulator allows to relieve downstream pressure in a quick and effective way.



Size	Part No.
0	HZE0R08GMV
1	HZE1R10GMV-HZE1R15GMV
2	HZE2R15GMV

Lubricator

		
Size	0	1
Part No.	HZE0L08G	HZE1L10G
Connections	G1/4	G3/8
Nominal flow rate (NL/min) ^(A)	1400	4400
Max inlet pressure (bar-MPa-psi)	10 - 1 - 145	10 - 1 - 145
Bowl capacity (cm³)	20	85
Recommended oil	ISO VG 32	ISO VG 32
Min. working flow rate (NL/min)	25	30
(A) = Inlet pressure 7 bar - Δp 0,5 bar		

Filter regulator



Size	0	1	2
Part No.	HZE0B08GM	HZE1B10GM	HZE1B15GM
Connections	G1/4	G3/8	G1/2
Filtration rate (μm)	5	5	5
Nominal flow rate (NL/min) ^(A)	600	2300	4500
Max inlet pressure (bar-MPa-psi)	10 - 1 - 145	10 - 1 - 145	10 - 1 - 145
Pressure adjustment - relieving version (bar)	0,5 ÷ 8,5	0,5 ÷ 8,5	0,5 ÷ 8,5
Pressure gauge (standard supplied)	HZ9464G	HZ9464G	HZ9464G
Pressure gauge adaptor	G1/8 ^(B)	G1/8 ^(C)	G1/8 ^(C)
Condensation drain capacity (cm ³)	12	45	80
Condensation drain	manual	manual	manual

(A) = Inlet pressure 7 bar, outlet pressure 5 bar - Δp 1 bar


(B) = Upon request (replace HZ9464G gauge with HZE7Z480 square adaptor G1/8, to be ordered separately)

(C) = Standard supplied (replace HZ9464G gauge with HZE7Z480 square adaptor G1/8 placed on the rear side)

Other available versions

Check valve size 0-1-2


The check valve inside the filter regulator allows to relieve downstream pressure in a quick and effective way.

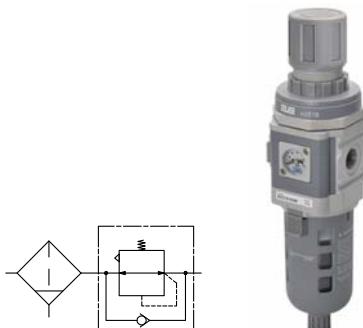

Size	Part No.
0	HZE0B08GMV
1	HZE1B10GMV-HZE1B15GMV
2	HZE2B15GMV

Filter regulator + Lubricator

4




Size	0	1	2
Part No.	HZE0D08GM	HZE1D10GM	HZE1D15GM
Connections	G1/4	G3/8	G1/2
Filtration rate (μm)	5	5	5
Nominal flow rate (NL/min) ^(A)	600	2800	4300
Max inlet pressure (bar-MPa-psi)	10 - 1 - 145	10 - 1 - 145	10 - 1 - 145
Fluid	compressed air	compressed air	compressed air
Pressure adjustment - relieving version (bar)	0,5 ÷ 8,5	0,5 ÷ 8,5	0,5 ÷ 8,5
Pressure gauge (standard supplied)	HZ9464G	HZ9464G	HZ9464G
Pressure gauge adaptor	G1/8 ^(B)	G1/8 ^(C)	G1/8 ^(C)
Condensation drain capacity (cm ³)	12	45	80
Condensation drain	manual	manual	manual
Recommended oil	ISO VG 32	ISO VG 32	ISO VG 32
Min. working flow rate (NL/min)	25	30	65

(A) = Inlet pressure 7 bar, outlet pressure 5 bar - Δp 1 bar

(B) = Upon request (replace HZ9464G gauge with HZE7Z480 square adaptor G1/8, to be ordered separately)

(C) = Standard supplied (replace HZ9464G gauge with HZE7Z480 square adaptor G1/8 placed on the rear side)

Filter + Regulator + Lubricator




Size	0	1	2
Part No.	HZE0C08GM	HZE1C10GM	HZE2C15GM
Connections	G1/4	G3/8	G1/2
Filtration rate (μm)	5	5	5
Nominal flow rate (NL/min) ^(A)	550	1700	2500
Max inlet pressure (bar-MPa-psi)	10 - 1 - 145	10 - 1 - 145	10 - 1 - 145
Fluid	compressed air	compressed air	compressed air
Pressure adjustment - relieving version (bar)	0,5 ÷ 8,5	0,5 ÷ 8,5	0,5 ÷ 8,5
Pressure gauge (standard supplied)	HZ9464G	HZ9464G	HZ9464G
Pressure gauge adaptor	G1/8 ^(B)	G1/8 ^(C)	G1/8 ^(C)
Condensation drain capacity (cm ³)	12	45	80
Condensation drain	manual	manual	manual
Recommended oil	ISO VG 32	ISO VG 32	ISO VG 32
Min. working flow rate (NL/min)	25	30	65

(A) = Inlet pressure 7 bar, outlet pressure 5 bar - Δp 1 bar

(B) = Upon request (replace HZ9464G gauge with HZE7Z480 square adaptor G1/8, to be ordered separately)


(C) = Standard supplied (replace HZ9464G gauge with HZE7Z480 square adaptor G1/8 placed on the rear side)

Gradual Starter

		
Size	0	1
Part No.	HZE0Y08G	HZE1Y10G
Connections	G1/4	G3/8
Nominal flow rate (NL/min) ^(A)	900	2200
Max inlet pressure (bar-MPa-psi)	10 - 1 - 145	10 - 1 - 145
Min. pressure (bar)	2	3,5
Fluid	compressed air	


(A) = Inlet pressure 7 bar, outlet pressure 5 bar - Δp 1 bar

Diverter Block

		
Size	0	1
Part No.	HZE0N08G	HZE1N10G
Connections	In/Out G1/4	In/Out G3/8
	Auxiliary G1/8	In/Out G1/2
Max inlet pressure (bar-MPa-psi)	10 - 1 - 145	10 - 1 - 145
Fluid	compressed air	

Use blanking plugs to close unused ways (not included)

Lockable Valve

		
Size	0	1
Part No.	HZE0P08G	HZE1P10G
Connections	G1/4	G3/8
Nominal flow rate (NL/min) ^(A)	900	5000
Max inlet pressure (bar-MPa-psi)	10 - 1 - 145	10 - 1 - 145
Fluid	compressed air	

(A) = Inlet pressure 7 bar, outlet pressure 5 bar - Δp 1 bar

Shut-off valve



Size	0	1	HZE1S15G
Part No.	HZE0S08G		
Connections	G1/4	G3/8	G1/2
Nominal flow rate (NL/min) ^(A)	900	2800	
Max inlet pressure (bar-MPa-psi)	10 - 1 - 145	10 - 1 - 145	
Min. pressure (bar-MPa-psi)	2 - 0,16 - 23	2 - 0,2 - 29	
Fluid	compressed air	compressed air	
Commutation system	poppet	poppet	
Ways/Positions	3/2 NC	3/2 NC	
Control	indirect electropneumatic	indirect electropneumatic	
Nominal diameter (mm)	8	10	
Electropilot	U1 AA series	U1 AA series	
Coil	DA/DC	DA/DC	
Manual Override	two-position screw	two-position screw	

(A) = Inlet pressure 7 bar, outlet pressure 5 bar - Δp 1 bar

Coils



Other available versions



Solenoid valves are supplied with locking nut, without coil

HZE0/1Z200	HZE0/1/2Z210	HZE0/1/2Z300	HZE0/1/2Z310	HZE7Z480/90	HZE2Z500/501
------------	--------------	--------------	--------------	-------------	--------------



Assembly kit
Size 0 HZE0Z200
Size 1-2 HZE1Z200

T-bracket assembly kit
Size 0 HZE0Z210
Size 1 HZE1Z210
Size 2 HZE2Z210

C-bracket
Size 0 HZE0Z300
Size 1 HZE1Z300
Size 2 HZE2Z300

Regulator L-bracket
Size 0 HZE0Z310
Size 1 HZE1Z310
Size 2 HZE2Z310

Threaded adaptor for pressure gauge
Size 0-1-2
G1/8 HZE7Z480
G1/4 HZE7Z490
Screw torque:
Max 0,6 Nm

Threaded ends
Size 2
G3/4 HZE2Z500
G1 HZE2Z501

Filter and filter regulator accessories

HZE0/1/2Z600	HZE0/1/2Z600SS	HZE7Z400	HZE0/1Z401	HZE0/1Z402
--------------	----------------	----------	------------	------------



Standard bowl with manual drain
Size 0 HZE0Z600
Size 1 HZE1Z600
Size 2 HZE2Z600

Bowl with semi-automatic drain
Size 0 HZE0Z600SS
Size 1 HZE1Z600SS
Size 2 HZE2Z600SS

Automatic drain
Size 1-2 HZE7Z400

Semi-automatic drain
Size 0 HZE0Z401
Size 1-2 HZE1Z401

Manual drain
Size 0 HZE0Z402
Size 1-2 HZE1Z402

HZE0/1/2Z660

HZE1/2Z670



Filter elements 5 µm
Size 0 HZE0Z660
Size 1 HZE1Z660
Size 2 HZE2Z660

Coalescing filter 0,3 µm
Size 1 HZE1Z670
Size 2 HZE2Z670

Other filter elements upon request

Regulator and filter regulator accessories

HZE0/1/2Z602	HZE1/2Z652/4/8	HZE0/1/2Z603	HZE0/1/2Z610/1
--------------	----------------	--------------	----------------



Knob
Size 0 HZE0Z602
Size 1 HZE1Z602
Size 2 HZE2Z602

Regulator spring
Size 1 Pressure adjustment
HZE1Z652 0,5 ÷ 1,7
HZE1Z654 0,5 ÷ 3,5
HZE1Z658 0,5 ÷ 8,5
Size 2
HZE2Z652 0,5 ÷ 1,7
HZE2Z654 0,5 ÷ 3,5
HZE2Z658 0,5 ÷ 8,5

Ring nut for panel
Size 0 HZE0Z603
Size 1 HZE1Z603
Size 2 HZE2Z603

Diaphragm kit
Size 0 HZE0Z610 relieving
HZE0Z611 non-relieving
Size 1 HZE1Z610 relieving
HZE1Z611 non-relieving
Size 2 HZE2Z610 relieving
HZE2Z611 non-relieving

Lubricator accessories

HZE0/1/2Z601	HZE7Z470
--------------	----------



Standard bowl
Size 0 HZE0Z601
Size 1 HZE1Z601
Size 2 HZE2Z601

Lubricator transparent dome
Size 0-1-2 HZE7Z470

Pressure gauge

4

■ HZ9P



Thread: brass, copper alloy
Body: technopolymer
Movement: brass
Indicator: aluminium, black painted
Dial: acrylic pressure mounted
Accuracy: EN 837 class 1,6 - 2,5. ASME B40.1 grade B
Protection: IP 43

Part No.	\emptyset	Scale		Thread
		Bar	MPa	
HZ9P400318	40	0 - 2,5	0 - 0,25	R1/8
HZ9P400618	40	0 - 6	0 - 0,6	R1/8
HZ9P401018	40	0 - 10	0 - 1	R1/8
HZ9P500314	50	0 - 2,5	0 - 0,25	R1/4
HZ9P500614	50	0 - 6	0 - 0,6	R1/4
HZ9P501014	50	0 - 10	0 - 1	R1/4
HZ9P630314	63	0 - 2,5	0 - 0,25	R1/4
HZ9P630614	63	0 - 6	0 - 0,6	R1/4
HZ9P631014	63	0 - 10	0 - 1	R1/4

Pressure gauge with flange for panel mounting

■ HZ9PB



Thread: brass, copper alloy
Body: metal, black painted
Assembly: chromium plated front flange with 3 holes
Movement: brass
Indicator: aluminium, black painted
Dial: acrylic
Accuracy: EN 837 class 1,6 - 2,5. ASME B40.1 grade B
Protection: IP 43

Part No.	\emptyset	Scale		Thread
		Bar	MPa	
HZ9PB400318	40	0 - 2,5	0 - 0,25	R1/8
HZ9PB400618	40	0 - 6	0 - 0,6	R1/8
HZ9PB401018	40	0 - 10	0 - 1	R1/8
HZ9PB500314	50	0 - 2,5	0 - 0,25	R1/4
HZ9PB500614	50	0 - 6	0 - 0,6	R1/4
HZ9PB501014	50	0 - 10	0 - 1	R1/4
HZ9PB630314	63	0 - 2,5	0 - 0,25	R1/4
HZ9PB630614	63	0 - 6	0 - 0,6	R1/4
HZ9PB631014	63	0 - 10	0 - 1	R1/4

Pressure gauge with bracket for panel mounting

■ HZ9PBS



Thread: brass, copper alloy
Body: metal, black painted
Assembly: border with rear bracket
Movement: brass
Indicator: aluminium, black painted
Dial: acrylic
Accuracy: EN 837 class 1,6 - 2,5. ASME B40.1 grade B
Protection: IP 43

Part No.	\emptyset	Scale		Thread
		Bar	MPa	
HZ9PBS400318	40	0 - 2,5	0 - 0,25	R1/8
HZ9PBS400618	40	0 - 6	0 - 0,6	R1/8
HZ9PBS401018	40	0 - 10	0 - 1	R1/8
HZ9PBS500314	50	0 - 2,5	0 - 0,25	R1/4
HZ9PBS500614	50	0 - 6	0 - 0,6	R1/4
HZ9PBS501014	50	0 - 10	0 - 1	R1/4
HZ9PBS630314	63	0 - 2,5	0 - 0,25	R1/4
HZ9PBS630614	63	0 - 6	0 - 0,6	R1/4
HZ9PBS631014	63	0 - 10	0 - 1	R1/4

Recessed pressure gauge

■ HZ9464G



Body: tecnopolymer
Assembly: HZE series regulator and filter regulator size 0-1-2
Scale: 0 ÷ 12 bar
Dial: polycarbonate
Accuracy: ± 3% full scale

Precision regulators

■ HZRP10



Adjusting range

HZRP1008GA 0,1 ÷ 3 bar
 HZRP1008GB 0,1 ÷ 4 bar
 HZRP1008GC 0,1 ÷ 8 bar

HZRP12: version with oversized exhaust

■ HZRP20



Adjusting range

HZRP2008GA 0 ÷ 0,1 bar
 HZRP2008GB 0 ÷ 1 bar
 HZRP2008GC 0 ÷ 2 bar
 HZRP2008GD 0 ÷ 4 bar
 HZRP2008GE 0 ÷ 10 bar

Part No.	HZRP10	HZRP20
Fluid	filtered compressed air, not lubricated	
Connections	G1/4	
Max pressure	10 bar	17 bar
Ambient temperature	-17 ÷ +55 °C	-40 ÷ +70 °C
Nominal flow rate	420 NI/min ^(B)	1600 NI/min ^(B)
Consumption	3 NI/min	30 ÷ 375 NI/min (based on outlet pressure)
Exhaust capacity	HZRP10 = 90 NI/min HZRP12 = 330 NI/min	110 NI/min
Pressure variation	less than 0,4 mbar ^(A)	less than 7 mbar ^(A)
Sensitivity	0,3 mbar	0,3 mbar
Body	zamak	die-cast aluminium
Diaphragms	NBR	NBR
Capsule and adjusting screw	stainless steel	stainless steel, brass
Knob	technopolymer	technopolymer

(A) = HZRP10 With supply pressure variation 2 bar

(A) = HZRP20 With supply pressure variation 7 bar

(B) = HZRP10 Inlet pressure 7 bar, outlet pressure 1,4 bar

(B) = HZRP20 Inlet pressure 7 bar, outlet pressure 5 bar, Δp 1 bar

HZRP1310



Fixing bracket
for HZRP10

HZRP2310



Fixing bracket
for HZRP20

HZ9P...



Gauges Ø50 - R1/4
 HZP500314 0 - 2,5 bar
 HZP500614 0 - 6 bar
 HZP501014 0 - 10 bar

Electro-pneumatic transducers



■ HZRE10

Adjusting range
 0,2 ÷ 1 bar
 0,14 ÷ 4 bar
 0,2 ÷ 8 bar

■ HZRE20

Adjusting range
 0,2 ÷ 1 bar
 0,14 ÷ 4 bar
 0,14 ÷ 7 bar

Part No.

HZRE10

HZRE20

Fluid	filtered compressed air, not lubricated	
Connections	G1/4	
Max pressure	7 ÷ 10 bar	7 ÷ 9 bar
Temperature	-30 ÷ +65 °C	-40 ÷ +70 °C
Flow rate	350 ÷ 600 NI/min	
Control Signal	0-10 V / 4-20 mA	
Voltage	-	7-30 V DC
Control System	Piezoelectric open ring	Piezoelectric closed ring
Hysteresis	< 0,5% F.S.	± 0,10% F.S.
Repeatability		

Values of pressure and flow rate vary according to the model of transducer.

For further information please contact our Sales Office

Microregulators for air



Part No.	HZRM08G
Ambient temperature	-10 ÷ 50 °C
Max working pressure	20 bar
Fluid-relieving version	filtered air, with or without lubrication, neutral gases
Pressure adjustment ^(A)	0,8 ÷ 8 bar
Connections	G1/4
Pressure gauge connections	G1/8
Nominal flow rate ^(B)	320 NL/min
Body	aluminium
Knob	technopolymer
Bonnet	technopolymer
Spring	steel C85
Diaphragm	nitrile rubber (NBR)

(A) = Different adjustment range upon request

(B) = Nitrogen flow rate inlet pressure 15 bar, outlet pressure 5 bar, Δp 1 bar

Ring nut for panel mounting not included

HZRM603

HZRM310

HZRM652/4/8

HZRM610/1

AZ-0200


Ring nut for panel
HZRM603 Technopolymer

Regulator L-bracket
HZRM310 Nickel-plated steel

Regulator spring
Pressure adjustment:
HZRM652 0,2÷1,5 bar
HZRM654 0,3÷3 bar
HZRM658 1,5÷15 bar

Diaphragm kit
HZRM610 relieving
HZRM611 non-relieving

Grub screw G1/8
AZ-0200

Microregulators for air and water



Part No.	Brass		Stainless steel	
	Upon request			
Ambient temperature	-10 ÷ 50 °C		-20 ÷ 80 °C	
Max working pressure	20 bar		30 bar	
Fluid relieving version	filtered air, with or without lubrication, neutral gases		water and compatible fluids	
non-relieving version				
Pressure adjustment ^(A)	0,8 ÷ 8 bar			
Connections	G1/4			
Pressure gauge connections	G1/8			
Nominal flow rate ^(B)	320 NL/min			
Body	brass		stainless steel AISI 316	
Knob	technopolymer		-	
Bonnet	technopolymer		stainless steel AISI 316	
Bonnet upon request	brass		technopolymer	
Spring	steel C85		stainless steel AISI 302	
Diaphragm	NBR		stainless steel AISI 316	

(A) = Different adjustment range upon request

(B) = Nitrogen flow rate Inlet pressure 15 bar, outlet pressure 5 bar, Δp 1 bar

Ring nut for panel mounting not included

HZRM603/603A

HZRM310/310A


Ring nut for panel
HZRM603 Technopolymer
HZRM603A Stainless steel AISI 316L

Regulator L-bracket
HZRM310 Nickel-plated steel
HZRM310A Stainless steel AISI 316L

5

Accessories



Push-in Fittings

HA
HAR
HB2
5
6Fittings with
pneumatic functions

HC

9



Standard Fittings

HD

13



Push-on Fittings

HGC

16



Olive Fittings

HGO

18



Quick Couplings

HGU

19



Tubes

HE/HF

20

Magnetic and
Electronic SensorsDF
DH/KM
DF-R/DF-T21
22
22


CHARACTERISTICS

Temperature	-20 ÷ 80 °C (based on the type of tube)
Fluid	compressed air, vacuum
Max pressure	15 bar
Working pressure	-0,99 ÷ 10 bar
Body	technopolymer
Fixing elements	nickel-plated brass with O-ring in NBR for parallel thread version (standard) teflon coating for taper thread version (upon request)
Clamp	stainless steel
Release ring	technopolymer
Application fields	pneumatic circuits
Recommended hoses	polyamide PA 10.12, polyurethane Sh.A98, co-polyurethane Sh.55D

HA02 Smooth body straight parallel male 	HA04 Straight parallel male 	HA06 Plastic straight parallel male
Ø connection	Ø connection	Ø connection
HA0204M5 4 M5 HA0206M5 6 M5 HA020418 4 G1/8 HA020618 6 G1/8 HA020818 8 G1/8 HA020414 4 G1/4 HA020614 6 G1/4 HA020814 8 G1/4 HA021014 10 G1/4 HA020838 8 G3/8 HA021038 10 G3/8 HA021238 12 G3/8 HA021012 10 G1/2 HA021212 12 G1/2	HA0404M5 4 M5 HA0406M5 6 M5 HA040418 4 G1/8 HA040618 6 G1/8 HA040818 8 G1/8 HA040414 4 G1/4 HA040614 6 G1/4 HA040814 8 G1/4 HA041014 10 G1/4 HA040838 8 G3/8 HA041038 10 G3/8 HA041238 12 G3/8 HA041012 10 G1/2 HA041212 12 G1/2	HA060618 6 G1/8 HA060818 8 G1/8 HA060614 6 G1/4 HA060814 8 G1/4 HA061014 10 G1/4 HA060838 8 G3/8 HA061038 10 G3/8 HA061238 12 G3/8 HA061012 10 G1/2 HA061212 12 G1/2
HA07 Straight female 	HA08 Swivel elbow female 	HA10B Low elbow
Ø connection	Ø connection	Ø connection
HA070418 4 G1/8 HA070618 6 G1/8 HA070818 8 G1/8 HA070614 6 G1/4 HA070814 8 G1/4 HA071014 10 G1/4 HA070838 8 G3/8 HA071038 10 G3/8 HA071238 12 G3/8 HA071212 12 G1/2	HA080418 4 G1/8 HA080618 6 G1/8 HA080818 8 G1/8 HA080614 4 G1/4 HA080814 8 G1/4 HA081014 10 G1/4 HA080838 8 G3/8 HA081038 10 G3/8 HA081238 12 G3/8 HA081212 12 G1/2	HA10B04M5 4 M5 HA10B06M5 6 M5 HA10B0418 4 G1/8 HA10B0618 6 G1/8 HA10B0818 8 G1/8 HA10B0414 4 G1/4 HA10B0614 6 G1/4 HA10B0814 8 G1/4 HA10B1014 10 G1/4 HA10B0838 8 G3/8 HA10B1038 10 G3/8 HA10B1238 12 G3/8 HA10B1012 10 G1/2 HA10B1212 12 G1/2
HA12 Extended swivel elbow parallel male 	HA12B Extended swivel low elbow parallel male 	HA14 Lateral Tee male
Ø connection	Ø connection	Ø connection
HA1204M5 4 M5 HA1206M5 6 M5 HA120418 4 G1/8 HA120618 6 G1/8 HA120818 8 G1/8 HA120414 4 G1/4 HA120614 6 G1/4 HA120814 8 G1/4 HA121014 10 G1/4 HA120638 6 G3/8 HA120838 8 G3/8 HA121038 10 G3/8 HA121238 12 G3/8 HA121012 10 G1/2 HA121212 12 G1/2	HA12B04M5 4 M5 HA12B06M5 6 M5 HA12B0418 4 G1/8 HA12B0618 6 G1/8 HA12B0818 8 G1/8 HA12B0414 4 G1/4 HA12B0614 6 G1/4 HA12B0814 8 G1/4 HA12B1014 10 G1/4 HA12B0638 6 G3/8 HA12B0838 8 G3/8 HA12B1038 10 G3/8 HA12B1238 12 G3/8 HA12B1012 10 G1/2 HA12B1212 12 G1/2	HA1404M5 4 M5 HA1406M5 6 M5 HA140418 4 G1/8 HA140618 6 G1/8 HA140818 8 G1/8 HA140614 6 G1/4 HA140814 8 G1/4 HA141014 10 G1/4 HA140838 8 G3/8 HA141038 10 G3/8 HA141238 12 G3/8 HA141012 10 G1/2 HA141212 12 G1/2
HA14B Low lateral Tee male 	HA16 Central Tee male 	HA16B Low central Tee male
Ø connection	Ø connection	Ø connection
HA14B04M5 4 M5 HA14B06M5 6 M5 HA14B0418 4 G1/8 HA14B0618 6 G1/8 HA14B0818 8 G1/8 HA14B0614 6 G1/4 HA14B0814 8 G1/4 HA14B1014 10 G1/4 HA14B0838 8 G3/8 HA14B1038 10 G3/8 HA14B1238 12 G3/8 HA14B1012 10 G1/2 HA14B1212 12 G1/2	HA1604M5 4 M5 HA1606M5 6 M5 HA160418 4 G1/8 HA160618 6 G1/8 HA160818 8 G1/8 HA160614 6 G1/4 HA160814 8 G1/4 HA161014 10 G1/4 HA160838 8 G3/8 HA161038 10 G3/8 HA161238 12 G3/8 HA161012 10 G1/2 HA161212 12 G1/2	HA16B04M5 4 M5 HA16B06M5 6 M5 HA16B0418 4 G1/8 HA16B0618 6 G1/8 HA16B0818 8 G1/8 HA16B0614 6 G1/4 HA16B0814 8 G1/4 HA16B1014 10 G1/4 HA16B0838 8 G3/8 HA16B1038 10 G3/8 HA16B1238 12 G3/8 HA16B1012 10 G1/2 HA16B1212 12 G1/2
NEW	NEW	NEW

HA18 Y parallel male	HA19 Intermediate straight	HA20 Intermediate elbow																																																																																				
 Ø connection <table> <tbody> <tr><td>HA1804M5</td><td>4</td><td>M5</td></tr> <tr><td>HA1806M5</td><td>6</td><td>M5</td></tr> <tr><td>HA180418</td><td>4</td><td>G1/8</td></tr> <tr><td>HA180618</td><td>6</td><td>G1/8</td></tr> <tr><td>HA180818</td><td>8</td><td>G1/8</td></tr> <tr><td>HA180614</td><td>6</td><td>G1/4</td></tr> <tr><td>HA180814</td><td>8</td><td>G1/4</td></tr> <tr><td>HA181014</td><td>10</td><td>G1/4</td></tr> <tr><td>HA180838</td><td>8</td><td>G3/8</td></tr> <tr><td>HA181038</td><td>10</td><td>G3/8</td></tr> <tr><td>HA181238</td><td>12</td><td>G3/8</td></tr> <tr><td>HA181012</td><td>10</td><td>G1/2</td></tr> <tr><td>HA181212</td><td>12</td><td>G1/2</td></tr> </tbody> </table>	HA1804M5	4	M5	HA1806M5	6	M5	HA180418	4	G1/8	HA180618	6	G1/8	HA180818	8	G1/8	HA180614	6	G1/4	HA180814	8	G1/4	HA181014	10	G1/4	HA180838	8	G3/8	HA181038	10	G3/8	HA181238	12	G3/8	HA181012	10	G1/2	HA181212	12	G1/2	 Ø1 Ø2 <table> <tbody> <tr><td>HA190400</td><td>4</td><td>4</td></tr> <tr><td>HA190600</td><td>6</td><td>6</td></tr> <tr><td>HA190604</td><td>6</td><td>4</td></tr> <tr><td>HA190800</td><td>8</td><td>8</td></tr> <tr><td>HA190806</td><td>8</td><td>6</td></tr> <tr><td>HA191000</td><td>10</td><td>10</td></tr> <tr><td>HA191008</td><td>10</td><td>8</td></tr> <tr><td>HA191200</td><td>12</td><td>12</td></tr> <tr><td>HA191210</td><td>12</td><td>10</td></tr> </tbody> </table>	HA190400	4	4	HA190600	6	6	HA190604	6	4	HA190800	8	8	HA190806	8	6	HA191000	10	10	HA191008	10	8	HA191200	12	12	HA191210	12	10																			
HA1804M5	4	M5																																																																																				
HA1806M5	6	M5																																																																																				
HA180418	4	G1/8																																																																																				
HA180618	6	G1/8																																																																																				
HA180818	8	G1/8																																																																																				
HA180614	6	G1/4																																																																																				
HA180814	8	G1/4																																																																																				
HA181014	10	G1/4																																																																																				
HA180838	8	G3/8																																																																																				
HA181038	10	G3/8																																																																																				
HA181238	12	G3/8																																																																																				
HA181012	10	G1/2																																																																																				
HA181212	12	G1/2																																																																																				
HA190400	4	4																																																																																				
HA190600	6	6																																																																																				
HA190604	6	4																																																																																				
HA190800	8	8																																																																																				
HA190806	8	6																																																																																				
HA191000	10	10																																																																																				
HA191008	10	8																																																																																				
HA191200	12	12																																																																																				
HA191210	12	10																																																																																				
HA21 Intermediate lateral Tee	HA22 Intermediate cross	HA23 Intermediate Y connector																																																																																				
 Ø <table> <tbody> <tr><td>HA210400</td><td>4</td></tr> <tr><td>HA210600</td><td>6</td></tr> <tr><td>HA210800</td><td>8</td></tr> <tr><td>HA211000</td><td>10</td></tr> <tr><td>HA211200</td><td>12</td></tr> </tbody> </table>	HA210400	4	HA210600	6	HA210800	8	HA211000	10	HA211200	12	 Ø <table> <tbody> <tr><td>HA220400</td><td>4</td></tr> <tr><td>HA220600</td><td>6</td></tr> <tr><td>HA220800</td><td>8</td></tr> <tr><td>HA221000</td><td>10</td></tr> <tr><td>HA221200</td><td>12</td></tr> </tbody> </table>	HA220400	4	HA220600	6	HA220800	8	HA221000	10	HA221200	12	 Ø1 Ø2 <table> <tbody> <tr><td>HA230404</td><td>4</td><td>4</td></tr> <tr><td>HA230604</td><td>6</td><td>4</td></tr> <tr><td>HA230606</td><td>6</td><td>6</td></tr> <tr><td>HA230806</td><td>8</td><td>6</td></tr> <tr><td>HA230808</td><td>8</td><td>8</td></tr> <tr><td>HA231008</td><td>10</td><td>8</td></tr> <tr><td>HA231010</td><td>10</td><td>10</td></tr> <tr><td>HA231210</td><td>12</td><td>10</td></tr> <tr><td>HA231212</td><td>12</td><td>12</td></tr> </tbody> </table>	HA230404	4	4	HA230604	6	4	HA230606	6	6	HA230806	8	6	HA230808	8	8	HA231008	10	8	HA231010	10	10	HA231210	12	10	HA231212	12	12																																					
HA210400	4																																																																																					
HA210600	6																																																																																					
HA210800	8																																																																																					
HA211000	10																																																																																					
HA211200	12																																																																																					
HA220400	4																																																																																					
HA220600	6																																																																																					
HA220800	8																																																																																					
HA221000	10																																																																																					
HA221200	12																																																																																					
HA230404	4	4																																																																																				
HA230604	6	4																																																																																				
HA230606	6	6																																																																																				
HA230806	8	6																																																																																				
HA230808	8	8																																																																																				
HA231008	10	8																																																																																				
HA231010	10	10																																																																																				
HA231210	12	10																																																																																				
HA231212	12	12																																																																																				
HA24 Reducing stem	HA25 Y connector with male stem	HA26 Plug																																																																																				
 Ø1 Ø2 <table> <tbody> <tr><td>HA240406</td><td>4</td><td>6</td></tr> <tr><td>HA240408</td><td>4</td><td>8</td></tr> <tr><td>HA240608</td><td>6</td><td>8</td></tr> <tr><td>HA240610</td><td>6</td><td>10</td></tr> <tr><td>HA240810</td><td>8</td><td>10</td></tr> <tr><td>HA240812</td><td>8</td><td>12</td></tr> <tr><td>HA241012</td><td>10</td><td>12</td></tr> </tbody> </table>	HA240406	4	6	HA240408	4	8	HA240608	6	8	HA240610	6	10	HA240810	8	10	HA240812	8	12	HA241012	10	12	 Ø <table> <tbody> <tr><td>HA250400</td><td>4</td></tr> <tr><td>HA250600</td><td>6</td></tr> <tr><td>HA250800</td><td>8</td></tr> <tr><td>HA251000</td><td>10</td></tr> <tr><td>HA251200</td><td>12</td></tr> </tbody> </table>	HA250400	4	HA250600	6	HA250800	8	HA251000	10	HA251200	12	 Ø <table> <tbody> <tr><td>HA260400</td><td>4</td></tr> <tr><td>HA260600</td><td>6</td></tr> <tr><td>HA260800</td><td>8</td></tr> <tr><td>HA261000</td><td>10</td></tr> <tr><td>HA261200</td><td>12</td></tr> </tbody> </table>	HA260400	4	HA260600	6	HA260800	8	HA261000	10	HA261200	12																																											
HA240406	4	6																																																																																				
HA240408	4	8																																																																																				
HA240608	6	8																																																																																				
HA240610	6	10																																																																																				
HA240810	8	10																																																																																				
HA240812	8	12																																																																																				
HA241012	10	12																																																																																				
HA250400	4																																																																																					
HA250600	6																																																																																					
HA250800	8																																																																																					
HA251000	10																																																																																					
HA251200	12																																																																																					
HA260400	4																																																																																					
HA260600	6																																																																																					
HA260800	8																																																																																					
HA261000	10																																																																																					
HA261200	12																																																																																					
HA27 Swivel banjo connector (parallel male thread) with wrench head	HA28 Swivel banjo connector parallel male-female	HA29 Triple branch lateral Tee																																																																																				
 Ø connection <table> <tbody> <tr><td>HA2704M5</td><td>4</td><td>M5</td></tr> <tr><td>HA2706M5</td><td>6</td><td>M5</td></tr> <tr><td>HA270418</td><td>4</td><td>G1/8</td></tr> <tr><td>HA270618</td><td>6</td><td>G1/8</td></tr> <tr><td>HA270818</td><td>8</td><td>G1/8</td></tr> <tr><td>HA270614</td><td>6</td><td>G1/4</td></tr> <tr><td>HA270814</td><td>8</td><td>G1/4</td></tr> <tr><td>HA271014</td><td>10</td><td>G1/4</td></tr> <tr><td>HA270838</td><td>8</td><td>G3/8</td></tr> <tr><td>HA271038</td><td>10</td><td>G3/8</td></tr> <tr><td>HA271238</td><td>12</td><td>G3/8</td></tr> <tr><td>HA271012</td><td>10</td><td>G1/2</td></tr> <tr><td>HA271212</td><td>12</td><td>G1/2</td></tr> </tbody> </table>	HA2704M5	4	M5	HA2706M5	6	M5	HA270418	4	G1/8	HA270618	6	G1/8	HA270818	8	G1/8	HA270614	6	G1/4	HA270814	8	G1/4	HA271014	10	G1/4	HA270838	8	G3/8	HA271038	10	G3/8	HA271238	12	G3/8	HA271012	10	G1/2	HA271212	12	G1/2	 Ø connection <table> <tbody> <tr><td>HA2804M5</td><td>4</td><td>M5</td></tr> <tr><td>HA2806M5</td><td>6</td><td>M5</td></tr> <tr><td>HA280418</td><td>4</td><td>G1/8</td></tr> <tr><td>HA280618</td><td>6</td><td>G1/8</td></tr> <tr><td>HA280818</td><td>8</td><td>G1/8</td></tr> <tr><td>HA280614</td><td>6</td><td>G1/4</td></tr> <tr><td>HA280814</td><td>8</td><td>G1/4</td></tr> <tr><td>HA281014</td><td>10</td><td>G1/4</td></tr> <tr><td>HA280838</td><td>8</td><td>G3/8</td></tr> <tr><td>HA281038</td><td>10</td><td>G3/8</td></tr> <tr><td>HA281238</td><td>12</td><td>G3/8</td></tr> <tr><td>HA281012</td><td>10</td><td>G1/2</td></tr> <tr><td>HA281212</td><td>12</td><td>G1/2</td></tr> </tbody> </table>	HA2804M5	4	M5	HA2806M5	6	M5	HA280418	4	G1/8	HA280618	6	G1/8	HA280818	8	G1/8	HA280614	6	G1/4	HA280814	8	G1/4	HA281014	10	G1/4	HA280838	8	G3/8	HA281038	10	G3/8	HA281238	12	G3/8	HA281012	10	G1/2	HA281212	12	G1/2	 Ø <table> <tbody> <tr><td>HA290400</td><td>4</td></tr> <tr><td>HA290600</td><td>6</td></tr> <tr><td>HA290800</td><td>8</td></tr> </tbody> </table>	HA290400	4	HA290600	6	HA290800	8
HA2704M5	4	M5																																																																																				
HA2706M5	6	M5																																																																																				
HA270418	4	G1/8																																																																																				
HA270618	6	G1/8																																																																																				
HA270818	8	G1/8																																																																																				
HA270614	6	G1/4																																																																																				
HA270814	8	G1/4																																																																																				
HA271014	10	G1/4																																																																																				
HA270838	8	G3/8																																																																																				
HA271038	10	G3/8																																																																																				
HA271238	12	G3/8																																																																																				
HA271012	10	G1/2																																																																																				
HA271212	12	G1/2																																																																																				
HA2804M5	4	M5																																																																																				
HA2806M5	6	M5																																																																																				
HA280418	4	G1/8																																																																																				
HA280618	6	G1/8																																																																																				
HA280818	8	G1/8																																																																																				
HA280614	6	G1/4																																																																																				
HA280814	8	G1/4																																																																																				
HA281014	10	G1/4																																																																																				
HA280838	8	G3/8																																																																																				
HA281038	10	G3/8																																																																																				
HA281238	12	G3/8																																																																																				
HA281012	10	G1/2																																																																																				
HA281212	12	G1/2																																																																																				
HA290400	4																																																																																					
HA290600	6																																																																																					
HA290800	8																																																																																					
HA30 Triple branch lateral Tee	HA31 Triple branch lateral Tee male thread	HA32 Triple branch lateral Tee male thread																																																																																				
 Ø1 Ø2 <table> <tbody> <tr><td>HA300604</td><td>6</td><td>4</td></tr> <tr><td>HA300804</td><td>8</td><td>4</td></tr> <tr><td>HA300806</td><td>8</td><td>6</td></tr> <tr><td>HA301006</td><td>10</td><td>6</td></tr> <tr><td>HA301008</td><td>10</td><td>8</td></tr> </tbody> </table>	HA300604	6	4	HA300804	8	4	HA300806	8	6	HA301006	10	6	HA301008	10	8	 Ø1 Ø2 connection <table> <tbody> <tr><td>HA314618</td><td>6</td><td>4</td><td>G1/8</td></tr> <tr><td>HA314814</td><td>8</td><td>4</td><td>G1/4</td></tr> <tr><td>HA316814</td><td>8</td><td>6</td><td>G1/4</td></tr> <tr><td>HA318138</td><td>10</td><td>8</td><td>G3/8</td></tr> <tr><td>HA318112</td><td>10</td><td>8</td><td>G1/2</td></tr> </tbody> </table>	HA314618	6	4	G1/8	HA314814	8	4	G1/4	HA316814	8	6	G1/4	HA318138	10	8	G3/8	HA318112	10	8	G1/2	 Ø connection <table> <tbody> <tr><td>HA320418</td><td>4</td><td>G1/8</td></tr> <tr><td>HA320618</td><td>6</td><td>G1/8</td></tr> <tr><td>HA320818</td><td>8</td><td>G1/8</td></tr> <tr><td>HA320414</td><td>4</td><td>G1/4</td></tr> <tr><td>HA320614</td><td>6</td><td>G1/4</td></tr> <tr><td>HA320814</td><td>8</td><td>G1/4</td></tr> <tr><td>HA320638</td><td>6</td><td>G3/8</td></tr> <tr><td>HA320838</td><td>8</td><td>G3/8</td></tr> </tbody> </table>	HA320418	4	G1/8	HA320618	6	G1/8	HA320818	8	G1/8	HA320414	4	G1/4	HA320614	6	G1/4	HA320814	8	G1/4	HA320638	6	G3/8	HA320838	8	G3/8																									
HA300604	6	4																																																																																				
HA300804	8	4																																																																																				
HA300806	8	6																																																																																				
HA301006	10	6																																																																																				
HA301008	10	8																																																																																				
HA314618	6	4	G1/8																																																																																			
HA314814	8	4	G1/4																																																																																			
HA316814	8	6	G1/4																																																																																			
HA318138	10	8	G3/8																																																																																			
HA318112	10	8	G1/2																																																																																			
HA320418	4	G1/8																																																																																				
HA320618	6	G1/8																																																																																				
HA320818	8	G1/8																																																																																				
HA320414	4	G1/4																																																																																				
HA320614	6	G1/4																																																																																				
HA320814	8	G1/4																																																																																				
HA320638	6	G3/8																																																																																				
HA320838	8	G3/8																																																																																				

<p>■ HA33 Bulkhead connector</p> <table border="1"> <thead> <tr> <th></th> <th>Ø</th> <th></th> </tr> </thead> <tbody> <tr><td>HA330004</td><td>4</td><td></td></tr> <tr><td>HA330006</td><td>6</td><td></td></tr> <tr><td>HA330008</td><td>8</td><td></td></tr> <tr><td>HA330010</td><td>10</td><td></td></tr> <tr><td>HA330012</td><td>12</td><td></td></tr> </tbody> </table>		Ø		HA330004	4		HA330006	6		HA330008	8		HA330010	10		HA330012	12		<p>■ HA34 Threaded bulkhead connector</p> <table border="1"> <thead> <tr> <th></th> <th>Ø</th> <th>connection</th> </tr> </thead> <tbody> <tr><td>HA340418</td><td>4</td><td>G1/8</td></tr> <tr><td>HA340618</td><td>6</td><td>G1/8</td></tr> <tr><td>HA340818</td><td>8</td><td>G1/8</td></tr> <tr><td>HA340414</td><td>4</td><td>G1/4</td></tr> <tr><td>HA340614</td><td>6</td><td>G1/4</td></tr> <tr><td>HA340814</td><td>8</td><td>G1/4</td></tr> <tr><td>HA341014</td><td>10</td><td>G1/4</td></tr> <tr><td>HA340838</td><td>8</td><td>G3/8</td></tr> <tr><td>HA341038</td><td>10</td><td>G3/8</td></tr> <tr><td>HA341238</td><td>12</td><td>G3/8</td></tr> <tr><td>HA341012</td><td>10</td><td>G1/2</td></tr> <tr><td>HA341212</td><td>12</td><td>G1/2</td></tr> </tbody> </table>		Ø	connection	HA340418	4	G1/8	HA340618	6	G1/8	HA340818	8	G1/8	HA340414	4	G1/4	HA340614	6	G1/4	HA340814	8	G1/4	HA341014	10	G1/4	HA340838	8	G3/8	HA341038	10	G3/8	HA341238	12	G3/8	HA341012	10	G1/2	HA341212	12	G1/2	<p>■ HA35 Elbow bulkhead connector</p> <table border="1"> <thead> <tr> <th></th> <th>Ø</th> <th></th> </tr> </thead> <tbody> <tr><td>HA350004</td><td>4</td><td></td></tr> <tr><td>HA350006</td><td>6</td><td></td></tr> <tr><td>HA350008</td><td>8</td><td></td></tr> <tr><td>HA350010</td><td>10</td><td></td></tr> <tr><td>HA350012</td><td>12</td><td></td></tr> </tbody> </table>		Ø		HA350004	4		HA350006	6		HA350008	8		HA350010	10		HA350012	12																																																																															
	Ø																																																																																																																																																										
HA330004	4																																																																																																																																																										
HA330006	6																																																																																																																																																										
HA330008	8																																																																																																																																																										
HA330010	10																																																																																																																																																										
HA330012	12																																																																																																																																																										
	Ø	connection																																																																																																																																																									
HA340418	4	G1/8																																																																																																																																																									
HA340618	6	G1/8																																																																																																																																																									
HA340818	8	G1/8																																																																																																																																																									
HA340414	4	G1/4																																																																																																																																																									
HA340614	6	G1/4																																																																																																																																																									
HA340814	8	G1/4																																																																																																																																																									
HA341014	10	G1/4																																																																																																																																																									
HA340838	8	G3/8																																																																																																																																																									
HA341038	10	G3/8																																																																																																																																																									
HA341238	12	G3/8																																																																																																																																																									
HA341012	10	G1/2																																																																																																																																																									
HA341212	12	G1/2																																																																																																																																																									
	Ø																																																																																																																																																										
HA350004	4																																																																																																																																																										
HA350006	6																																																																																																																																																										
HA350008	8																																																																																																																																																										
HA350010	10																																																																																																																																																										
HA350012	12																																																																																																																																																										
<p>■ HA38 Stem elbow</p> <table border="1"> <thead> <tr> <th></th> <th>Ø</th> <th></th> </tr> </thead> <tbody> <tr><td>HA380400</td><td>4</td><td></td></tr> <tr><td>HA380600</td><td>6</td><td></td></tr> <tr><td>HA380800</td><td>8</td><td></td></tr> <tr><td>HA381000</td><td>10</td><td></td></tr> <tr><td>HA381200</td><td>12</td><td></td></tr> </tbody> </table>		Ø		HA380400	4		HA380600	6		HA380800	8		HA381000	10		HA381200	12		<p>■ HA39 Intermediate double Y</p> <table border="1"> <thead> <tr> <th></th> <th>Ø2</th> <th>Ø1</th> <th>Ø2</th> <th></th> </tr> </thead> <tbody> <tr><td>HA390604</td><td>6</td><td>4</td><td></td><td></td></tr> <tr><td>HA390804</td><td>8</td><td>4</td><td></td><td></td></tr> <tr><td>HA390806</td><td>8</td><td>6</td><td></td><td></td></tr> <tr><td>HA390808</td><td>8</td><td>8</td><td></td><td></td></tr> </tbody> </table>		Ø2	Ø1	Ø2		HA390604	6	4			HA390804	8	4			HA390806	8	6			HA390808	8	8			<p>■ HA40 Double Y parallel male</p> <table border="1"> <thead> <tr> <th></th> <th>Ø</th> <th>connection</th> </tr> </thead> <tbody> <tr><td>HA400418</td><td>4</td><td>G1/8</td></tr> <tr><td>HA400618</td><td>6</td><td>G1/8</td></tr> <tr><td>HA400818</td><td>8</td><td>G1/8</td></tr> <tr><td>HA400614</td><td>6</td><td>G1/4</td></tr> <tr><td>HA400814</td><td>8</td><td>G1/4</td></tr> <tr><td>HA401014</td><td>10</td><td>G1/4</td></tr> <tr><td>HA400638</td><td>6</td><td>G3/8</td></tr> <tr><td>HA400838</td><td>8</td><td>G3/8</td></tr> <tr><td>HA400612</td><td>6</td><td>G1/2</td></tr> <tr><td>HA400812</td><td>8</td><td>G1/2</td></tr> </tbody> </table>		Ø	connection	HA400418	4	G1/8	HA400618	6	G1/8	HA400818	8	G1/8	HA400614	6	G1/4	HA400814	8	G1/4	HA401014	10	G1/4	HA400638	6	G3/8	HA400838	8	G3/8	HA400612	6	G1/2	HA400812	8	G1/2																																																																													
	Ø																																																																																																																																																										
HA380400	4																																																																																																																																																										
HA380600	6																																																																																																																																																										
HA380800	8																																																																																																																																																										
HA381000	10																																																																																																																																																										
HA381200	12																																																																																																																																																										
	Ø2	Ø1	Ø2																																																																																																																																																								
HA390604	6	4																																																																																																																																																									
HA390804	8	4																																																																																																																																																									
HA390806	8	6																																																																																																																																																									
HA390808	8	8																																																																																																																																																									
	Ø	connection																																																																																																																																																									
HA400418	4	G1/8																																																																																																																																																									
HA400618	6	G1/8																																																																																																																																																									
HA400818	8	G1/8																																																																																																																																																									
HA400614	6	G1/4																																																																																																																																																									
HA400814	8	G1/4																																																																																																																																																									
HA401014	10	G1/4																																																																																																																																																									
HA400638	6	G3/8																																																																																																																																																									
HA400838	8	G3/8																																																																																																																																																									
HA400612	6	G1/2																																																																																																																																																									
HA400812	8	G1/2																																																																																																																																																									
<p>■ HA41 Swivel banjo connector (parallel thread) with allen head</p> <table border="1"> <thead> <tr> <th></th> <th>Ø</th> <th>connection</th> </tr> </thead> <tbody> <tr><td>HA410418</td><td>4</td><td>G1/8</td></tr> <tr><td>HA410618</td><td>6</td><td>G1/8</td></tr> <tr><td>HA410818</td><td>8</td><td>G1/8</td></tr> <tr><td>HA410414</td><td>4</td><td>G1/4</td></tr> <tr><td>HA410614</td><td>6</td><td>G1/4</td></tr> <tr><td>HA410814</td><td>8</td><td>G1/4</td></tr> <tr><td>HA411014</td><td>10</td><td>G1/4</td></tr> <tr><td>HA411214</td><td>12</td><td>G1/4</td></tr> <tr><td>HA410438</td><td>4</td><td>G3/8</td></tr> <tr><td>HA410638</td><td>6</td><td>G3/8</td></tr> <tr><td>HA410838</td><td>8</td><td>G3/8</td></tr> <tr><td>HA411038</td><td>10</td><td>G3/8</td></tr> <tr><td>HA411238</td><td>12</td><td>G3/8</td></tr> <tr><td>HA410812</td><td>8</td><td>G1/2</td></tr> <tr><td>HA411012</td><td>10</td><td>G1/2</td></tr> <tr><td>HA411212</td><td>12</td><td>G1/2</td></tr> </tbody> </table>		Ø	connection	HA410418	4	G1/8	HA410618	6	G1/8	HA410818	8	G1/8	HA410414	4	G1/4	HA410614	6	G1/4	HA410814	8	G1/4	HA411014	10	G1/4	HA411214	12	G1/4	HA410438	4	G3/8	HA410638	6	G3/8	HA410838	8	G3/8	HA411038	10	G3/8	HA411238	12	G3/8	HA410812	8	G1/2	HA411012	10	G1/2	HA411212	12	G1/2	<p>■ HA42 Double banjo connector (parallel thread) with allen head</p> <table border="1"> <thead> <tr> <th></th> <th>Ø</th> <th>connection</th> </tr> </thead> <tbody> <tr><td>HA420418</td><td>4</td><td>G1/8</td></tr> <tr><td>HA420618</td><td>6</td><td>G1/8</td></tr> <tr><td>HA420818</td><td>8</td><td>G1/8</td></tr> <tr><td>HA420414</td><td>4</td><td>G1/4</td></tr> <tr><td>HA420614</td><td>6</td><td>G1/4</td></tr> <tr><td>HA420814</td><td>8</td><td>G1/4</td></tr> <tr><td>HA421014</td><td>10</td><td>G1/4</td></tr> <tr><td>HA421214</td><td>12</td><td>G1/4</td></tr> <tr><td>HA420438</td><td>4</td><td>G3/8</td></tr> <tr><td>HA420638</td><td>6</td><td>G3/8</td></tr> <tr><td>HA420838</td><td>8</td><td>G3/8</td></tr> <tr><td>HA421038</td><td>10</td><td>G3/8</td></tr> <tr><td>HA421238</td><td>12</td><td>G3/8</td></tr> <tr><td>HA420812</td><td>8</td><td>G1/2</td></tr> <tr><td>HA421012</td><td>10</td><td>G1/2</td></tr> <tr><td>HA421212</td><td>12</td><td>G1/2</td></tr> </tbody> </table>		Ø	connection	HA420418	4	G1/8	HA420618	6	G1/8	HA420818	8	G1/8	HA420414	4	G1/4	HA420614	6	G1/4	HA420814	8	G1/4	HA421014	10	G1/4	HA421214	12	G1/4	HA420438	4	G3/8	HA420638	6	G3/8	HA420838	8	G3/8	HA421038	10	G3/8	HA421238	12	G3/8	HA420812	8	G1/2	HA421012	10	G1/2	HA421212	12	G1/2	<p>■ HA43 Triple banjo connector (parallel thread) with allen head</p> <table border="1"> <thead> <tr> <th></th> <th>Ø</th> <th>connection</th> </tr> </thead> <tbody> <tr><td>HA430418</td><td>4</td><td>G1/8</td></tr> <tr><td>HA430618</td><td>6</td><td>G1/8</td></tr> <tr><td>HA430818</td><td>8</td><td>G1/8</td></tr> <tr><td>HA430414</td><td>4</td><td>G1/4</td></tr> <tr><td>HA430614</td><td>6</td><td>G1/4</td></tr> <tr><td>HA430814</td><td>8</td><td>G1/4</td></tr> <tr><td>HA431014</td><td>10</td><td>G1/4</td></tr> <tr><td>HA431214</td><td>12</td><td>G1/4</td></tr> <tr><td>HA430438</td><td>4</td><td>G3/8</td></tr> <tr><td>HA430638</td><td>6</td><td>G3/8</td></tr> <tr><td>HA430838</td><td>8</td><td>G3/8</td></tr> <tr><td>HA431038</td><td>10</td><td>G3/8</td></tr> <tr><td>HA431238</td><td>12</td><td>G3/8</td></tr> <tr><td>HA430812</td><td>8</td><td>G1/2</td></tr> <tr><td>HA431012</td><td>10</td><td>G1/2</td></tr> <tr><td>HA431212</td><td>12</td><td>G1/2</td></tr> </tbody> </table>		Ø	connection	HA430418	4	G1/8	HA430618	6	G1/8	HA430818	8	G1/8	HA430414	4	G1/4	HA430614	6	G1/4	HA430814	8	G1/4	HA431014	10	G1/4	HA431214	12	G1/4	HA430438	4	G3/8	HA430638	6	G3/8	HA430838	8	G3/8	HA431038	10	G3/8	HA431238	12	G3/8	HA430812	8	G1/2	HA431012	10	G1/2	HA431212	12	G1/2
	Ø	connection																																																																																																																																																									
HA410418	4	G1/8																																																																																																																																																									
HA410618	6	G1/8																																																																																																																																																									
HA410818	8	G1/8																																																																																																																																																									
HA410414	4	G1/4																																																																																																																																																									
HA410614	6	G1/4																																																																																																																																																									
HA410814	8	G1/4																																																																																																																																																									
HA411014	10	G1/4																																																																																																																																																									
HA411214	12	G1/4																																																																																																																																																									
HA410438	4	G3/8																																																																																																																																																									
HA410638	6	G3/8																																																																																																																																																									
HA410838	8	G3/8																																																																																																																																																									
HA411038	10	G3/8																																																																																																																																																									
HA411238	12	G3/8																																																																																																																																																									
HA410812	8	G1/2																																																																																																																																																									
HA411012	10	G1/2																																																																																																																																																									
HA411212	12	G1/2																																																																																																																																																									
	Ø	connection																																																																																																																																																									
HA420418	4	G1/8																																																																																																																																																									
HA420618	6	G1/8																																																																																																																																																									
HA420818	8	G1/8																																																																																																																																																									
HA420414	4	G1/4																																																																																																																																																									
HA420614	6	G1/4																																																																																																																																																									
HA420814	8	G1/4																																																																																																																																																									
HA421014	10	G1/4																																																																																																																																																									
HA421214	12	G1/4																																																																																																																																																									
HA420438	4	G3/8																																																																																																																																																									
HA420638	6	G3/8																																																																																																																																																									
HA420838	8	G3/8																																																																																																																																																									
HA421038	10	G3/8																																																																																																																																																									
HA421238	12	G3/8																																																																																																																																																									
HA420812	8	G1/2																																																																																																																																																									
HA421012	10	G1/2																																																																																																																																																									
HA421212	12	G1/2																																																																																																																																																									
	Ø	connection																																																																																																																																																									
HA430418	4	G1/8																																																																																																																																																									
HA430618	6	G1/8																																																																																																																																																									
HA430818	8	G1/8																																																																																																																																																									
HA430414	4	G1/4																																																																																																																																																									
HA430614	6	G1/4																																																																																																																																																									
HA430814	8	G1/4																																																																																																																																																									
HA431014	10	G1/4																																																																																																																																																									
HA431214	12	G1/4																																																																																																																																																									
HA430438	4	G3/8																																																																																																																																																									
HA430638	6	G3/8																																																																																																																																																									
HA430838	8	G3/8																																																																																																																																																									
HA431038	10	G3/8																																																																																																																																																									
HA431238	12	G3/8																																																																																																																																																									
HA430812	8	G1/2																																																																																																																																																									
HA431012	10	G1/2																																																																																																																																																									
HA431212	12	G1/2																																																																																																																																																									

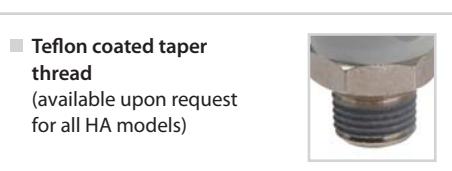

Technopolymer flow regulators (p. 5.9)

CHARACTERISTICS

Temperature	0 ÷ 60 °C
Fluid	compressed air, vacuum
Working pressure	-0,99 ÷ 9 bar
Body	technopolymer
Fixing elements	
Clamp	сталь
Release ring	техноПОМЕР
Application fields	пневматические цепи
Recommended hoses	полиамид PA 10.12, полиуретан Sh.A98, со-полиуретан Sh.55D

<p>HAR04 Miniature straight male</p> <p>Ø connection HAR0403M3 3 M3 HAR0404M3 4 M3 HAR0404M5 4 M5</p>	<p>HAR10B Miniature swivel elbow male</p> <p>Ø connection HAR10B03M3 3 M3 HAR10B04M3 4 M3 HAR10B04M5 4 M5</p>	<p>HAR12B Miniature extended swivel elbow male</p> <p>Ø connection HAR12B03M3 3 M3 HAR12B04M3 4 M3 HAR12B04M5 4 M5</p>
<p>HAR14B Miniature low lateral Tee male</p> <p>Ø connection HAR14B03M3 3 M3 HAR14B04M3 4 M3 HAR14B04M5 4 M5</p>	<p>HAR16B Miniature low central Tee male</p> <p>Ø connection HAR16B03M3 3 M3 HAR16B04M3 4 M3 HAR16B04M5 4 M5</p>	<p>HAR19 Miniature intermediate straight</p> <p>Ø HAR190300 3 HAR190400 4</p>
<p>HAR20 Miniature intermediate elbow</p> <p>Ø HAR200300 3 HAR200400 4</p>	<p>HAR21 Miniature intermediate Tee</p> <p>Ø HAR210300 3 HAR210400 4</p>	<p>HAR23 Miniature intermediate Y</p> <p>Ø HAR230300 3 HAR230400 4</p>

CHARACTERISTICS

Temperature	-20 ÷ 70 °C (based on the type of tube)
Fluid	compressed air, vacuum
Max pressure	16 bar
Working pressure	-0,99 ÷ 10 bar
Body	nickel-plated brass
Fixing elements	nickel-plated brass with O-ring in NBR for parallel thread version (standard) Teflon coating for taper thread version (upon request)
Clamp	stainless steel AISI 316
Release ring	nickel-plated brass
Application fields	pneumatic circuits
Recommended hoses	polyamide PA 10.12, polyurethane Sh.A98, co-polyurethane Sh.55D

HB04

Straight parallel male



	Ø connection		Ø connection
HB0403M3	3 M3	HB040514	5 G1/4
HB0403M5	3 M5	HB040414	4 G1/4
HB0404M5	4 M5	HB041438	14 G3/8
HB0405M5	5 M5	HB041238	12 G3/8
HB0406M5	6 M5	HB041038	10 G3/8
HB041018	10 G1/8	HB040838	8 G3/8
HB040818	8 G1/8	HB040638	6 G3/8
HB040618	6 G1/8	HB041412	14 G1/2
HB040518	5 G1/8	HB041212	12 G1/2
HB040418	4 G1/8	HB041012	10 G1/2
HB041214	12 G1/4	HB040812	8 G1/4
HB041014	10 G1/4		
HB040814	8 G1/4		
HB040614	6 G1/4		

HB07

Straight female



	Ø connection
HB0704M5	4 M5
HB070418	4 G1/8
HB070518	5 G1/8
HB070618	6 G1/8
HB070818	8 G1/8
HB071038	10 G3/8
HB070414	4 G1/4
HB070514	5 G1/4
HB070614	6 G1/4
HB070814	8 G1/4
HB071014	10 G1/4

HB08

Swivel elbow female



	Ø connection
HB080418	4 G1/8
HB080618	6 G1/8
HB080818	8 G1/8
HB080414	4 G1/4
HB080614	6 G1/4
HB080814	8 G1/4

HB10

Swivel elbow male



	Ø connection		Ø connection
HB1004M5	4 M5	HB100838	8 G3/8
HB1005M5	5 M5	HB101038	10 G3/8
HB1006M5	6 M5	HB101238	12 G3/8
HB100418	4 G1/8	HB101438	14 G3/8
HB100518	5 G1/8	HB101012	10 G1/2
HB100618	6 G1/8	HB101212	12 G1/2
HB100818	8 G1/8	HB101412	14 G1/2
HB100414	4 G1/4		
HB100514	5 G1/4		
HB100614	6 G1/4		
HB100814	8 G1/4		
HB101014	10 G1/4		
HB101214	12 G1/4		
HB100638	6 G3/8		

HB12

Extended swivel elbow male



	Ø connection
HB1204M5	4 M5
HB1206M5	6 M5
HB120418	4 G1/8
HB120618	6 G1/8
HB120818	8 G1/8
HB120414	4 G1/4
HB120614	6 G1/4
HB120814	8 G1/4
HB121014	10 G1/4
HB120838	8 G3/8
HB121038	10 G3/8

HB14

Lateral Tee parallel male



	Ø connection
HB1404M5	4 M5
HB140418	4 G1/8
HB140618	6 G1/8
HB140818	8 G1/8
HB140414	4 G1/4
HB140614	6 G1/4
HB140814	8 G1/4
HB141014	10 G1/4
HB141214	12 G1/4
HB140838	8 G3/8
HB141038	10 G3/8
HB141238	12 G3/8
HB141412	14 G1/2

HB16

Central Tee male



	Ø connection
HB1604M5	4 M5
HB160418	4 G1/8
HB160618	6 G1/8
HB160818	8 G1/8
HB160414	4 G1/4
HB160614	6 G1/4
HB160814	8 G1/4
HB161014	10 G1/4
HB161214	12 G1/4
HB160838	8 G3/8
HB161038	10 G3/8
HB161238	12 G3/8
HB161412	14 G1/2

HB19

Straight



Ø1	Ø2
HB190303	3 3
HB190404	4 4
HB190505	5 5
HB190604	6 4
HB190606	6 6
HB190806	8 6
HB190808	8 8
HB191008	10 8
HB191010	10 10
HB191210	12 10
HB191212	12 12
HB191412	14 12
HB191414	14 14

HB20
Intermediate elbow



	Ø
HB200300	3
HB200400	4
HB200500	5
HB200600	6
HB200800	8
HB201000	10
HB201200	12
HB201400	14

HB24
Reducing stem



	Ø1	Ø2	Ø1	Ø2
HB240405	4	5	HB240612	6
HB240406	4	6	HB240614	6
HB240408	4	8	HB240806	8
HB240412	4	12	HB240810	8
HB240414	4	14	HB240812	8
HB240506	5	6	HB240814	8
HB240508	5	8	HB241012	10
HB240604	6	4	HB241014	10
HB240608	6	8	HB241214	12
HB240610	6	10		14

HB27
Swivel banjo connector (parallel thread) with allen head



	Ø	connection	Ø	connection
HB2703M3	3	M3	HB270614	6
HB2703M5	3	M5	HB270814	8
HB2704M5	4	M5	HB271014	10
HB2705M5	5	M5	HB271214	12
HB270418	4	G1/8	HB270838	8
HB270518	5	G1/8	HB271038	10
HB270618	6	G1/8	HB271238	12
HB270818	8	G1/8		

HB34
Threaded bulkhead connector



	Ø	connection
HB340418	4	G1/8
HB340618	6	G1/8
HB340818	8	G1/8
HB340614	6	G1/4
HB340814	8	G1/4

HB38
Stem elbow



	Ø1	Ø2
HB380400	4	4
HB380406	4	6
HB380600	6	6
HB380608	6	8
HB380800	8	8
HB381000	10	10
HB381200	12	12

HB21
Intermediate Tee



	Ø1	Ø2
HB210300	3	3
HB210400	4	4
HB210500	5	5
HB210600	6	6
HB210604	6	4
HB210800	8	8
HB210806	8	6
HB211000	10	10
HB211008	10	8
HB211200	12	12
HB211400	14	14

HB24
Reducing stem



	Ø
HB260400	4
HB260500	5
HB260600	6
HB260800	8
HB261000	10
HB261200	12
HB261400	14

HB33
Bulkhead connector



	Ø
HB330004	4
HB330005	5
HB330006	6
HB330008	8
HB330010	10
HB330012	12
HB330014	14

HB35
Elbow bulkhead connector



	Ø
HB350004	4
HB350006	6
HB350008	8
HB350010	10

HB39
Extended stem elbow



	Ø1	Ø2
HB390400	4	4
HB390406	4	6
HB390600	6	6
HB390608	6	8
HB390800	8	8

■ HB40

Single banjo (without bolt)



	Ø	bolt
HB4004M5	4	M5
HB4005M5	5	M5
HB4006M5	6	M5
HB400418	4	G1/8
HB400518	5	G1/8
HB400618	6	G1/8
HB400818	8	G1/8
HB400614	6	G1/4
HB400814	8	G1/4
HB401014	10	G1/4
HB401214	12	G1/4
HB400838	8	G3/8
HB401038	10	G3/8
HB401238	12	G3/8

■ HB41

Double banjo (without bolt)



	Ø	bolt
HB4104M5	4	M5
HB4105M5	5	M5
HB410418	4	G1/8
HB410518	5	G1/8
HB410618	6	G1/8
HB410818	8	G1/8
HB410614	6	G1/4
HB410814	8	G1/4
HB411014	10	G1/4
HB410838	8	G3/8
HB411038	10	G3/8
HB411238	12	G3/8

■ HB42

Single banjo bolt



	connection
HB4200M5	M5
HB420018	G1/8
HB420014	G1/4
HB420038	G3/8

■ HB43

Double banjo bolt



	connection
HB430018	G1/8
HB430014	G1/4
HB430038	G3/8

■ HB44

Triple banjo bolt



	connection
HB440018	G1/8
HB440014	G1/4
HB440038	G3/8

■ HB45

Swivel banjo central Tee (parallel male) with allen head



	Ø	connection
HB4504M5	4	M5
HB4505M5	5	M5
HB450418	4	G1/8
HB450518	5	G1/8
HB450618	6	G1/8
HB450818	8	G1/8
HB450614	6	G1/4
HB450814	8	G1/4
HB451014	10	G1/4
HB450838	8	G3/8
HB451038	10	G3/8
HB451238	12	G3/8

■ HB47

Double swivel banjo connector (male thread) with allen head



	Ø	connection
HB470418	4	G1/8
HB470618	6	G1/8
HB470818	8	G1/8
HB470614	6	G1/4
HB470814	8	G1/4
HB471014	10	G1/4
HB471214	12	G1/4

■ HB48

Triple swivel banjo connector (parallel thread) with allen head



	Ø	connection
HB480418	4	G1/8
HB480618	6	G1/8
HB480818	8	G1/8
HB480614	6	G1/4
HB480814	8	G1/4
HB481014	10	G1/4
HB481214	12	G1/4

■ HB49

Double stem



	Ø
HB490400	4
HB490500	5
HB490600	6
HB490800	8
HB491000	10
HB491200	12
HB491400	14

■ HB51

Adaptor parallel male



	Ø	connection		Ø	connection
HB5104M5	4	M5	HB510614	6	G1/4
HB5105M5	5	M5	HB510814	8	G1/4
HB5106M5	6	M5	HB511014	10	G1/4
HB510418	4	G1/8	HB511214	12	G1/4
HB510518	5	G1/8	HB510838	8	G3/8
HB510618	6	G1/8	HB511038	10	G3/8
HB510818	8	G1/8	HB511238	12	G3/8
HB511018	10	G1/8	HB511438	14	G3/8
HB510414	4	G1/4	HB5111212	12	G1/2
HB510514	5	G1/4	HB511412	14	G1/2

■ HB53

Fixed elbow taper male



	Ø	connection
HB530418	4	R1/8
HB530518	5	R1/8
HB530618	6	R1/8
HB530818	8	R1/8
HB530614	6	R1/4
HB530814	8	R1/4
HB531014	10	R1/4


CHARACTERISTICS

Temperature	-20 ÷ 80 °C (based on the type of tube)
Fluid	compressed air, vacuum
Max pressure	15 bar
Working pressure	-0,99 ÷ 10 bar
Body	technopolymer
Fixing elements	nickel-plated brass with O-ring in NBR for parallel thread version (standard) Teflon coating for taper thread version (upon request)
Clamp	stainless steel
Release ring	technopolymer
Application fields	pneumatic circuits
Recommended hoses	polyamide PA 10.12, polyurethane Sh.A98, co-polyurethane Sh.55D

Flow regulators in technopolymer

HC01/HC02

One-way banjo flow regulator



exhaust	supply	Ø	connection
HC0104M5	HC0204M5	4	M5
HC0106M5	HC0206M5	6	M5
HC010418	HC020418	4	G1/8
HC010618	HC020618	6	G1/8
HC010818	HC020818	8	G1/8
HC010414	HC020414	4	G1/4
HC010614	HC020614	6	G1/4
HC010814	HC020814	8	G1/4
HC011014	HC021014	10	G1/4
HC010838	HC020838	8	G3/8
HC011038	HC021038	10	G3/8
HC011238	HC021238	12	G3/8
HC011012	HC021012	10	G1/2
HC011212	HC021212	12	G1/2

HC01T/HC02T

One-way swivel banjo flow regulator - screwdriver slot



exhaust	supply	Ø	connection
HC01T0418	HC02T0418	4	G1/8
HC01T0618	HC02T0618	6	G1/8
HC01T0818	HC02T0818	8	G1/8
HC01T1018	HC02T1018	10	G1/8
HC01T1218	HC02T1218	12	G1/8
HC01T0614	HC02T0614	6	G1/4
HC01T0814	HC02T0814	8	G1/4
HC01T1014	HC02T1014	10	G1/4
HC01T1214	HC02T1214	12	G1/4
HC01T0638	HC02T0638	6	G3/8
HC01T0838	HC02T0838	8	G3/8
HC01T1038	HC02T1038	10	G3/8
HC01T1238	HC02T1238	12	G3/8

NEW

HC01L/HC02L

One-way in-line swivel banjo flow regulator



NEW

exhaust	supply	Ø	connection
HC01L0418	HC02L0418	4	G1/8
HC01L0618	HC02L0618	6	G1/8
HC01L0818	HC02L0818	8	G1/8
HC01L0414	HC02L0414	4	G1/4
HC01L0614	HC02L0614	6	G1/4
HC01L0814	HC02L0814	8	G1/4
HC01L1014	HC02L1014	10	G1/4
HC01L1214	HC02L1214	12	G1/4
HC01L1038	HC02L1038	10	G3/8
HC01L1238	HC02L1238	12	G3/8

HC04

One-way in-line intermediate flow regulator



Ø1
HC040404
HC040606
HC040808
HC041010
HC041212

CHARACTERISTICS

Temperature	0 ÷ 70 °C
Fluid	compressed air
Max pressure	10 bar
Working pressure	0,3 ÷ 10 bar

Flow regulators with metallic body

5

HC21/HC22


One-way banjo flow regulator



	exhaust	supply	Ø connection
HC2104M5	HC2204M5	4	M5
HC210418	HC220418	4	G1/8
HC210618	HC220618	6	G1/8
HC210818	HC220818	8	G1/8
HC210614	HC220614	6	G1/4
HC210814	HC220814	8	G1/4
HC211014	HC221014	10	G1/4

HC18/HC19

One-way banjo flow regulator - screwdriver slot



	exhaust	supply	Ø connection
HC1804M5	HC1904M5	4	M5
HC180418	HC190418	4	G1/8
HC180618	HC190618	6	G1/8
HC180818	HC190818	8	G1/8
HC180614	HC190614	6	G1/4
HC180814	HC190814	8	G1/4
HC181014	HC191014	10	G1/4

HC27/HC28

One-way threaded flow regulator male/female




	exhaust	supply	connection
HC27M5M5	HC28M5M5	M5	
HC271818	HC281818	G1/8	
HC271414	HC281414	G1/4	
HC273838	HC283838	G3/8	
HC271212	HC281212	G1/2	

Non-return valve

HC13

Non-return valve F-F



	connection
HC1300M5	M5
HC130018	G1/8
HC130014	G1/4
HC130038	G3/8
HC130012	G1/2

High temperature seals upon request

HC14

Non-return valve F-M



	connection
HC140018	G1/8
HC140014	G1/4

High temperature seals upon request

HC15

Non-return valve with push-in tube connections



	Ø
HC150004	4
HC150006	6
HC150008	8

HC16

Non-return valve with push-in tube connections



	Ø
HC160404	4
HC160606	6
HC160808	8
HC161010	10
HC161212	12

NEW

HC17

Non-return valve threaded connection




	Ø	connection
HC170418	4	G1/8
HC170618	6	G1/8
HC170818	8	G1/8
HC170614	6	G1/4
HC170814	8	G1/4
HC171038	10	G3/8
HC171238	12	G3/8
HC171012	10	G1/2
HC171212	12	G1/2

NEW

Quick exhaust valves

HC06

Quick exhaust valve




		connection	1→2	2→3
HC0600M5	M5	M5	220	300
HC060018	G1/8	G1/8	680	1100
HC060014	G1/4	G1/4	1200	2100
HC060038	G3/8	G3/8	2300	4800
HC060012	G1/2	G1/2	3400	6100
HC060034	G3/4	G3/4	3200	8750
HC060001	G1	G1	2900	10.750

flow rate at 6 bar (NL/min)

Blocking valve

HC34


	M	F	flow rate at 6 bar (NL/min)
HC3418M5	G1/8	M5	400
HC3414M5	G1/4	M5	850
HC343818	G3/8	G1/8	1250



Miniature pressure regulator

HC35

	connection	flow rate at 6 bar (NL/min)
HC350018	G1/8	580
HC350014	G1/4	750



CHARACTERISTICS

Temperature

0 ÷ 70 °C

Fluid

0 ÷ 60 °C (technopolymer HC11-12)

Max pressure

compressed air, vacuum

Working pressure


15 bar

-0,99 ÷ 10 bar

Line manual valve

HC05

Slide valve




	connection
HC0500M5	M5
HC050018	G1/8
HC050014	G1/4
HC050038	G3/8
HC050012	G1/2
HC050034	G3/4

HC07

Ball valve F-F

**HC08**

Ball valve M-F




	connection
HC070018	G1/8
HC070014	G1/4
HC070038	G3/8
HC070012	G1/2
HC070034	G3/4

	connection
HC080018	G1/8
HC080014	G1/4
HC080038	G3/8
HC080012	G1/2
HC080034	G3/4

HC09


Miniature ball valve F-F with black handle



	connection
HC090018	G1/8
HC090014	G1/4

HC10


Miniature ball valve M-F with black handle



	connection
HC100018	G1/8
HC100014	G1/4

HC11


Manual 2/2 minivalve



	Ø
HC110606	6
HC110808	8
HC111010	10
HC111212	12

HC12

Manual 3/2 minivalve



	Ø
HC120606	6
HC120808	8
HC121010	10
HC121212	12

Silencers

HC51

Sintered bronze flat silencer



connection

HC5100M5	M5
HC510018	G1/8
HC510014	G1/4
HC510038	G3/8
HC510012	G1/2
HC510034	G3/4
HC510001	G1
HC510112	G1 1/2

HC52

Sintered bronze cone silencer



connection

HC5200M5	M5
HC520018	G1/8
HC520014	G1/4
HC520038	G3/8
HC520012	G1/2
HC520034	G3/4
HC520001	G1

HC53Sintered bronze cone silencer
(with square wrench head)

connection

HC5300M5	M5
HC530018	G1/8
HC530014	G1/4
HC530038	G3/8
HC530012	G1/2
HC530034	G3/4
HC530001	G1

HC54

Silencer with exhaust flow regulator (narrow)



connection

HC5400M5	M5
HC540018	G1/8
HC540014	G1/4
HC540038	G3/8
HC540012	G1/2
HC540034	G3/4
HC540001	G1

HC55

Silencer with exhaust flow regulator



connection

HC5500M5	M5
HC550018	G1/8
HC550014	G1/4
HC550038	G3/8
HC550012	G1/2
HC550034	G3/4
HC550001	G1

HC56

Technopolymer dynamic silencer



connection

HC560018	G1/8
HC560014	G1/4
HC560038	G3/8
HC560012	G1/2
HC560034	G3/4
HC560001	G1

HC57

Polyethylene plastic silencer



connection

HC5700M5	M5
HC570018	G1/8
HC570014	G1/4
HC570038	G3/8
HC570012	G1/2
HC570034	G3/4
HC570001	G1

HC58

Technopolymer silencer



connection

HC580018	G1/8
HC580014	G1/4
HC580038	G3/8
HC580012	G1/2
HC580034	G3/4
HC580001	G1

HC59

Silencer with dome-shaped steel head



connection

HC5900M5	M5
HC590018	G1/8
HC590014	G1/4
HC590038	G3/8
HC590012	G1/2
HC590034	G3/4
HC590001	G1

HC60

Cone silencer with hexagon nipple



connection

HC6000M5	M5
HC600018	G1/8
HC600014	G1/4
HC600038	G3/8
HC600012	G1/2
HC600034	G3/4
HC600001	G1
HC600112	G1 1/2

HC61

Recessed silencer



connection

HC6100M5	M5
HC610018	G1/8
HC610014	G1/4
HC610038	G3/8
HC610012	G1/2
HC610034	G3/4
HC610001	G1

CHARACTERISTICS

Temperature	-15 ÷ +80 °C
Max pressure	50 bar
Body	nickel-plated brass, aluminium, zinc-plated steel
Application fields	pneumatic circuits, low-pressure oleodynamic and hydraulic circuits, vacuum

HD01 Parallel nipple



	connection	connection	key
	1	2	
HD01M5M5	M5	M5	8
HD01M518	M5	G1/8	14
HD011818	G1/8	G1/8	14
HD011814	G1/8	G1/4	17
HD011838	G1/8	G3/8	19
HD011414	G1/4	G1/4	17
HD011438	G1/4	G3/8	19
HD011412	G1/4	G1/2	24
HD013838	G3/8	G3/8	19
HD013812	G3/8	G1/2	24
HD011212	G1/2	G1/2	24
HD011234	G1/2	G3/4	30
HD013434	G3/4	G3/4	30

HD02 Taper nipple



	connection	connection	key
	1	2	
HD021818	R1/8	R1/8	12
HD021814	R1/8	R1/4	14
HD021838	R1/8	R3/8	17
HD021414	R1/4	R1/4	14
HD021438	R1/4	R3/8	17
HD021412	R1/4	R1/2	22
HD023838	R3/8	R3/8	17
HD023812	R3/8	R1/2	22
HD021212	R1/2	R1/2	22
HD021234	R1/2	R3/4	27
HD023434	R3/4	R3/4	27
HD023401	R3/4	R1	34
HD020101	R1	R1	34

HD03 Female socket



	connection	key
HD0300M5	M5	8
HD030018	G1/8	14
HD030014	G1/4	17
HD030038	G3/8	22
HD030012	G1/2	26
HD030034	G3/4	32

HD04

Reduction M-F taper thread



	connection	connection	key
	M	F	
HD041814	R1/4	G1/8	14
HD041838	R3/8	G1/8	17
HD041812	R1/2	G1/8	22
HD041438	R3/8	G1/4	17
HD041412	R1/2	G1/4	22
HD043812	R1/2	G3/8	22
HD043834	R3/4	G3/8	27
HD041234	R3/4	G1/2	27

HD05

Reduction M-F parallel thread



	connection	connection	key
	M	F	
HD05M518	G1/8	M5	14
HD051814	G1/4	G1/8	17
HD051838	G3/8	G1/8	19
HD051812	G1/2	G1/8	24
HD051438	G3/8	G1/4	19
HD051412	G1/2	G1/4	24
HD053812	G1/2	G3/8	24
HD053834	G3/4	G3/8	30
HD051234	G3/4	G1/2	30

HD06

Extension M-F taper thread



	connection	connection	key
	M	F	
HD061818	R1/8	G1/8	14
HD061814	R1/8	G1/4	17
HD061838	R1/8	G3/8	22
HD061414	R1/4	G1/4	17
HD061438	R1/4	G3/8	22
HD061412	R1/4	G1/2	24
HD063838	R3/8	G3/8	22
HD063812	R3/8	G1/2	24
HD061212	R1/2	G1/2	26
HD061234	R1/2	G3/4	32

HD07

Extension M-F parallel thread



	connection	connection	key
	M	F	
HD07M518	M5	G1/8	14
HD071818	G1/8	G1/8	14
HD071814	G1/8	G1/4	17
HD071838	G1/8	G3/8	22
HD071414	G1/4	G1/4	17
HD071438	G1/4	G3/8	22
HD071412	G1/4	G1/2	24
HD073838	G3/8	G3/8	22
HD073812	G3/8	G1/2	24
HD071212	G1/2	G1/2	26

HD08

Extension M-F parallel thread



	connection	M-F	key
HD081822	G1/8	14	
HD081435	G1/4	17	
HD081451	G1/4	17	
HD081842	G1/8	14	
HD081851	G1/8	14	

HD09

Extension F-F



	connection	connection	key
	1	2	
HD091814	G1/8	G1/4	17
HD091838	G1/8	G3/8	22
HD091812	G1/8	G1/2	24
HD091438	G1/4	G3/8	22
HD091412	G1/4	G1/2	24
HD093812	G3/8	G1/2	24
HD091234	G1/2	G3/4	32

HD10

Male plug with hexagon wrench head



	connection	key
HD1000M5	M5	8
HD100018	G1/8	14
HD100014	G1/4	17
HD100038	G3/8	19
HD100012	G1/2	24
HD100034	G3/4	30
HD100001	G1	38

HD11

Male plug (taper thread) with allen head



	connection	key
HD110018	R1/8	5
HD110014	R1/4	6
HD110038	R3/8	8
HD110012	R1/2	10

HD12

Male plug with O-ring (allen head)



	connection	key	
	1	2	
HD1200M5	M5	2,5	
HD120018	G1/8	5	
HD120014	G1/4	6	
HD120038	G3/8	8	
HD120012	G1/2	10	

HD13

Female plug



	connection	key
HD130018	G1/8	14
HD130014	G1/4	17
HD130038	G3/8	20
HD130012	G1/2	24

HD14

Elbow connector F-F



	connection	key
HD1400M5	M5	8
HD140018	G1/8	10
HD140014	G1/4	13
HD140038	G3/8	17
HD140012	G1/2	21
HD140034	G3/4	25
HD140001	G1	30

HD15

Elbow connector M-F



	connection	key	
	1	2	
HD1500M5	M5	9	
HD150018	R1/8	G1/8	10
HD151814	R1/4	G1/8	10
HD150014	R1/4	G1/4	13
HD150038	R3/8	G3/8	17
HD150012	R1/2	G1/2	21
HD150034	R3/4	G3/4	25
HD150001	R1	G1	30

HD16

Elbow connector M-M (taper thread)



	connection	connection	key
	1	2	
HD1600M5	M5	M5	9
HD160018	R1/8	R1/8	10
HD161814	R1/8	R1/4	10
HD160014	R1/4	R1/4	13
HD160038	R3/8	R3/8	17
HD160012	R1/2	R1/2	21
HD160034	R3/4	R3/4	25
HD160001	R1	R1	30

HD17

Intermediate Tee F-F-F (parallel thread)



	connection	key
	M	F
HD1700M5	M5	9
HD170018	G1/8	10
HD170014	G1/4	13
HD170038	G3/8	17
HD170012	G1/2	21
HD170034	G3/4	25
HD170001	G1	30

HD18

Central Tee M-F-F



	connection	connection	key
	M	F	
HD1800M5	M5	M5	9
HD180018	R1/8	G1/8	10
HD180014	R1/4	G1/4	13
HD180038	R3/8	G3/8	18
HD180012	R1/2	G1/2	21
HD180034	R3/4	G3/4	25
HD180001	R1	G1	30

HD19

Lateral Tee M-F-F



	connection	connection	key
	M	F	
HD1900M5	M5	M5	9
HD190018	R1/8	G1/8	10
HD190014	R1/4	G1/4	13
HD190038	R3/8	G3/8	18
HD190012	R1/2	G1/2	21
HD190034	R3/4	G3/4	25
HD190001	R1	G1	30

HD20

Intermediate Tee M-M-M (taper thread)



	connection	key
	M	F
HD200018	R1/8	10
HD200014	R1/4	13
HD200038	R3/8	17
HD200012	R1/2	21
HD200034	R3/4	25
HD200001	R1	30

HD21

Lateral Tee M-F-M



	connection	connection	key
	M	F	
HD210018	R1/8	G1/8	10
HD210014	R1/4	G1/4	13
HD210038	R3/8	G3/8	17
HD210012	R1/2	G1/2	21
HD210034	R3/4	G3/4	25
HD210001	R1	G1	30

HD22

Cross F-F-F



	connection	key
HD220018	G1/8	10
HD220014	G1/4	13
HD220038	G3/8	17
HD220012	G1/2	21

HD24

Tube adaptor (parallel thread)



	Ø	connection	key
	M	F	
HD2404M5	4	M5	8
HD240618	6	G1/8	14
HD240718	7	G1/8	14
HD240818	8	G1/8	14
HD240918	9	G1/8	14
HD241018	10	G1/8	14
HD240614	6	G1/4	17
HD240714	7	G1/4	17
HD240814	8	G1/4	17
HD240914	9	G1/4	17
HD241014	10	G1/4	17
HD241214	12	G1/4	17
HD240938	9	G3/8	19
HD241038	10	G3/8	19

	Ø	connection	key
	M	F	
HD241238	12	G3/8	19
HD241438	14	G3/8	19
HD241738	17	G3/8	19
HD241212	12	G1/2	24
HD241412	14	G1/2	24
HD241712	17	G1/2	24
HD242012	20	G1/2	30
HD242034	20	G3/4	30

HD25

Y connector F-F-F



	connection	key
	M	F
HD250018	G1/8	10
HD250014	G1/4	13
HD250038	G3/8	17
HD250012	G1/2	21

HD26

Y connector M-F-F



	connection	connection	key
	M	F	
HD260018	R1/8	G1/8	13
HD260014	R1/4	G1/4	17
HD260038	R3/8	G3/8	20
HD260012	R1/2	G1/2	25

HD27

Threaded bulkhead connector



	connection	key
	M	F
HD2700M5	M5	14
HD270018	G1/8	19
HD270014	G1/4	24
HD270038	G3/8	30
HD270012	G1/2	32

HD32

Female single banjo



	connection	key
	M	F
HD3200M5	M5	8
HD320018	G1/8	14
HD320014	G1/4	17

HD33

Taper nipple - 3 pieces



	connection	key
	M	F
HD330018	R1/8	15
HD330014	R1/4	19
HD330038	R3/8	22
HD330012	R1/2	27
HD330034	R3/4	36
HD330001	R1	46

HD34

Female nipple - 3 pieces



	connection	key
	M	F
HD340018	G1/8	14
HD340014	G1/4	17
HD340038	G3/8	21
HD340012	G1/2	25

HD42

Single banjo bolt



	connection	key
	M	F
HD4200M5	M5	8
HD420018	R1/8	14
HD420014	R1/4	17
HD420038	R3/8	19
HD420012	R1/2	24

HD43

Double banjo bolt



	connection	key
	M	F
HD430018	R1/8	14
HD430014	R1/4	17
HD430038	R3/8	19
HD430012	R1/2	24

HD44

Triple banjo bolt



	connection	key
	M	F
HD440018	R1/8	14
HD440014	R1/4	17

■ HD45
Aluminium washer



	connection	thickness (mm)
HD4500M5	M5	1
HD450018	G1/8	1,5
HD450014	G1/4	1,5
HD450038	G3/8	1,5
HD450012	G1/2	1,5

■ HD46
Indented nylon washer



	connection	thickness (mm)
HD4600M5	M5	1
HD460018	G1/8	1,6
HD460014	G1/4	1,6
HD460038	G3/8	1,8
HD460012	G1/2	2

Accessories

■ HD23
Cross block F-F-F-F



	connection
HD230018	G1/8
HD230014	G1/4
HD230038	G3/8
HD230012	G1/2

■ HD30
Distribution manifold (single outlets)



	In	Out	nr.
HD301803	G1/4	G1/8	3
HD301804	G1/4	G1/8	4
HD301805	G1/4	G1/8	5
HD301806	G1/4	G1/8	6
HD301403	G3/8	G1/4	3
HD301404	G3/8	G1/4	4
HD301405	G3/8	G1/4	5
HD301406	G3/8	G1/4	6
HD303803	G1/2	G3/8	3
HD303804	G1/2	G3/8	4
HD303805	G1/2	G3/8	5
HD303806	G1/2	G3/8	6

■ HD31
Distributors manifold (double outlets)



	In	Out	nr.
HD311803	G1/4	G1/8	3+3
HD311804	G1/4	G1/8	4+4
HD311805	G1/4	G1/8	5+5
HD311403	G3/8	G1/4	3+3
HD311404	G3/8	G1/4	4+4
HD311405	G3/8	G1/4	5+5

■ HD40
Reservoir (Max pressure 10 bar)



HD400100	lt 1
HD400250	lt 2,5
HD400500	lt 5
HD400700	lt 7
HD401200	lt 12

■ HD410000A
Stainless steel AISI 301 bracket



■ HD410000B
Reservoir extension

**■ AM50****■ AM51****■ AM52****■ AM53****■ AM54****■ AM5200****■ AM5220****■ AM55**

AM series (p. 3.92/93)

CHARACTERISTICS

Temperature	-15 ÷ 80 °C
Fluid	compressed air, vacuum, liquid
Working pressure	-0,99 ÷ 10 bar
Max pressure	16 bar
Body	nickel-plated brass
Nut	nickel-plated brass
Seal	NBR
Application fields	pneumatic circuits
Recommended tube	polyamide PA 10.12, polyurethane Sh.A98, co-polyurethane Sh.55D

HGC03

Male straight taper thread



Ø connection

HGC030418	4 - 2,7	R1/8	HGC030838	8 - 6	R3/8
HGC030518	5 - 3	R1/8	HGC031038	10 - 8	R3/8
HGC030618	6 - 4	R1/8	HGC031238	12 - 10	R3/8
HGC030818	8 - 6	R1/8	HGC030812	8 - 6	R1/2
HGC031018	10 - 8	R1/8	HGC031012	10 - 8	R1/2
HGC030614	6 - 4	R1/4	HGC031212	12 - 10	R1/2
HGC030814	8 - 6	R1/4	HGC031512	15 - 12,5	R1/2
HGC031014	10 - 8	R1/4			
HGC030638	6 - 4	R3/8			

Ø connection

HGC04

Male straight parallel thread with O-Ring



Ø connection

HGC0404M5	4 - 2,7	M5	HGC041038	10 - 8	G3/8
HGC0405M5	5 - 3	M5	HGC041238	12 - 10	G3/8
HGC0406M5	6 - 4	M5	HGC041012	10 - 8	G1/2
HGC040418	4 - 2,7	G1/8	HGC041212	12 - 10	G1/2
HGC040618	6 - 4	G1/8			
HGC040818	8 - 6	G1/8			
HGC041018	10 - 8	G1/8			
HGC040614	6 - 4	G1/4			
HGC040814	8 - 6	G1/4			
HGC041014	10 - 8	G1/4			
HGC040838	8 - 6	G3/8			

Ø connection

HGC07

Female straight



Ø connection

HGC070618	6 - 4	G1/8
HGC070818	8 - 6	G1/8
HGC070614	6 - 4	G1/4
HGC070814	8 - 6	G1/4
HGC071014	10 - 8	G1/4
HGC070838	8 - 6	G3/8
HGC071038	10 - 8	G3/8
HGC071238	12 - 10	G3/8

HGC08

Female elbow



Ø connection

HGC080618	6 - 4	G1/8
HGC080614	6 - 4	G1/4
HGC080818	8 - 6	G1/8
HGC080814	8 - 6	G1/4
HGC080838	8 - 6	G3/8
HGC081014	10 - 8	G1/4
HGC081038	10 - 8	G3/8
HGC081238	12 - 10	G3/8

HGC09

Taper elbow connection male



Ø connection

HGC090418	4 - 2,7	R1/8
HGC090518	5 - 3	R1/8
HGC090618	6 - 4	R1/8
HGC090818	8 - 6	R1/8
HGC091018	10 - 8	R1/8
HGC090614	6 - 4	R1/4
HGC090814	8 - 6	R1/4
HGC091014	10 - 8	R1/4
HGC090638	6 - 4	R3/8
HGC090838	8 - 6	R3/8
HGC091038	10 - 8	R3/8
HGC091238	12 - 10	R3/8
HGC090812	8 - 6	R1/2
HGC091012	10 - 8	R1/2
HGC091212	12 - 10	R1/2
HGC091512	15 - 12,5	R1/2

HGC10

Swivel elbow with OR



Ø connection

HGC100618	6 - 4	G1/8
HGC100818	8 - 6	G1/8
HGC100614	6 - 4	G1/4
HGC100814	8 - 6	G1/4
HGC101014	10 - 8	G1/4
HGC100838	8 - 6	G3/8
HGC101038	10 - 8	G3/8
HGC101238	12 - 10	G3/8

HGC14

Male lateral Tee taper thread



Ø connection

HGC140618	6 - 4	R1/8
HGC140614	6 - 4	R1/4
HGC140818	8 - 6	R1/8
HGC140814	8 - 6	R1/4
HGC140838	8 - 6	R3/8
HGC141014	10 - 8	R1/4
HGC141038	10 - 8	R3/8
HGC141012	10 - 8	R1/2
HGC141238	12 - 10	R3/8
HGC141212	12 - 10	R1/2
HGC141512	15 - 12,5	R1/2

HGC16

Male central Tee taper thread



Ø connection

HGC160618	6 - 4	R1/8
HGC160614	6 - 4	R1/4
HGC160818	8 - 6	R1/8
HGC160814	8 - 6	R1/4
HGC160838	8 - 6	R3/8
HGC161014	10 - 8	R1/4
HGC161038	10 - 8	R3/8
HGC161012	10 - 8	R1/2
HGC161238	12 - 10	R3/8
HGC161212	12 - 10	R1/2
HGC161512	15 - 12,5	R1/2

HGC19

Intermediate straight



Ø

HGC190600	6 - 4
HGC190800	8 - 6
HGC191000	10 - 8
HGC191200	12 - 10
HGC191500	15 - 12,5

HGC20

Intermediate elbow



Ø

HGC200400	4 - 2,7
HGC200600	6 - 4
HGC200800	8 - 6
HGC201000	10 - 8
HGC201200	12 - 10
HGC201500	15 - 12,5

HGC21

Intermediate Tee



Ø

HGC210400	4 - 2,7
HGC210600	6 - 4
HGC210800	8 - 6
HGC211000	10 - 8
HGC211200	12 - 10
HGC211500	15 - 12,5

HGC22
Intermediate cross



	Ø
HGC220600	6 - 4
HGC220800	8 - 6
HGC221000	10 - 8

HGC30
Nut



	Ø	thread
HGC300400	4 - 2	M7x0,75
HGC300600	6 - 4	M10x1
HGC300800	8 - 6	M12x1
HGC301000	10 - 8	M14x1
HGC301200	12 - 10	M16x1
HGC301500	15 - 12,5	M20x1

HGC33
Intermediate straight bulkhead connector



	Ø
HGC330610	6 - 4
HGC330812	8 - 6
HGC331014	10 - 8
HGC331216	12 - 10
HGC331520	15 - 12,5

HGC40
Single banjo



	Ø	connection
HGC4004M5	4 - 2	M5
HGC4005M5	5 - 3	M5
HGC4006M5	6 - 4	M5
HGC400618	6 - 4	G1/8
HGC400818	8 - 6	G1/8
HGC400614	6 - 4	G1/4
HGC400814	8 - 6	G1/4
HGC401014	10 - 8	G1/4
HGC400838	8 - 6	G3/8
HGC401038	10 - 8	G3/8

Bolt to be used:
HD42 - HD43 - HD44

CHARACTERISTICS

Temperature	-15 ÷ 80 °C
Fluid	compressed air, water, oil
Working pressure	130 bar (Ø4), 180 bar (Ø6), 150 bar (Ø8), 110 bar (Ø10), 75 bar (Ø12), 70 bar (Ø15)
Body	nickel-plated brass
Nut	nickel-plated brass
Seals	NBR
Application fields	pneumatic circuits
Recommended tube	copper alloy, brass, stainless steel, plastic (reinforcing core)

<p>HGO03 Male straight taper thread</p> <table border="0"> <thead> <tr> <th></th> <th style="text-align: center;">Ø connection</th> </tr> </thead> <tbody> <tr><td>HGO030418</td><td>4 R1/8</td></tr> <tr><td>HGO030618</td><td>6 R1/8</td></tr> <tr><td>HGO030818</td><td>8 R1/8</td></tr> <tr><td>HGO030614</td><td>6 R1/4</td></tr> <tr><td>HGO030814</td><td>8 R1/4</td></tr> <tr><td>HGO031014</td><td>10 R1/4</td></tr> <tr><td>HGO030838</td><td>8 R3/8</td></tr> <tr><td>HGO031038</td><td>10 R3/8</td></tr> <tr><td>HGO031238</td><td>12 R3/8</td></tr> <tr><td>HGO031212</td><td>12 R1/2</td></tr> <tr><td>HGO031512</td><td>15 R1/2</td></tr> </tbody> </table>		Ø connection	HGO030418	4 R1/8	HGO030618	6 R1/8	HGO030818	8 R1/8	HGO030614	6 R1/4	HGO030814	8 R1/4	HGO031014	10 R1/4	HGO030838	8 R3/8	HGO031038	10 R3/8	HGO031238	12 R3/8	HGO031212	12 R1/2	HGO031512	15 R1/2	<p>HGO04 Male straight parallel thread</p> <table border="0"> <thead> <tr> <th></th> <th style="text-align: center;">Ø connection</th> </tr> </thead> <tbody> <tr><td>HGO040418</td><td>4 G1/8</td></tr> <tr><td>HGO040618</td><td>6 G1/8</td></tr> <tr><td>HGO040818</td><td>8 G1/8</td></tr> <tr><td>HGO040614</td><td>6 G1/4</td></tr> <tr><td>HGO040814</td><td>8 G1/4</td></tr> <tr><td>HGO041014</td><td>10 G1/4</td></tr> <tr><td>HGO040838</td><td>8 G3/8</td></tr> <tr><td>HGO041038</td><td>10 G3/8</td></tr> </tbody> </table>		Ø connection	HGO040418	4 G1/8	HGO040618	6 G1/8	HGO040818	8 G1/8	HGO040614	6 G1/4	HGO040814	8 G1/4	HGO041014	10 G1/4	HGO040838	8 G3/8	HGO041038	10 G3/8	<p>HGO09 Male elbow taper thread</p> <table border="0"> <thead> <tr> <th></th> <th style="text-align: center;">Ø connection</th> </tr> </thead> <tbody> <tr><td>HGO090418</td><td>4 R1/8</td></tr> <tr><td>HGO090618</td><td>6 R1/8</td></tr> <tr><td>HGO090818</td><td>8 R1/8</td></tr> <tr><td>HGO090614</td><td>6 R1/4</td></tr> <tr><td>HGO090814</td><td>8 R1/4</td></tr> <tr><td>HGO091014</td><td>10 R1/4</td></tr> <tr><td>HGO090838</td><td>8 R3/8</td></tr> <tr><td>HGO091038</td><td>10 R3/8</td></tr> <tr><td>HGO091238</td><td>12 R3/8</td></tr> <tr><td>HGO091212</td><td>12 R1/2</td></tr> <tr><td>HGO091512</td><td>15 R1/2</td></tr> </tbody> </table>		Ø connection	HGO090418	4 R1/8	HGO090618	6 R1/8	HGO090818	8 R1/8	HGO090614	6 R1/4	HGO090814	8 R1/4	HGO091014	10 R1/4	HGO090838	8 R3/8	HGO091038	10 R3/8	HGO091238	12 R3/8	HGO091212	12 R1/2	HGO091512	15 R1/2	
	Ø connection																																																																				
HGO030418	4 R1/8																																																																				
HGO030618	6 R1/8																																																																				
HGO030818	8 R1/8																																																																				
HGO030614	6 R1/4																																																																				
HGO030814	8 R1/4																																																																				
HGO031014	10 R1/4																																																																				
HGO030838	8 R3/8																																																																				
HGO031038	10 R3/8																																																																				
HGO031238	12 R3/8																																																																				
HGO031212	12 R1/2																																																																				
HGO031512	15 R1/2																																																																				
	Ø connection																																																																				
HGO040418	4 G1/8																																																																				
HGO040618	6 G1/8																																																																				
HGO040818	8 G1/8																																																																				
HGO040614	6 G1/4																																																																				
HGO040814	8 G1/4																																																																				
HGO041014	10 G1/4																																																																				
HGO040838	8 G3/8																																																																				
HGO041038	10 G3/8																																																																				
	Ø connection																																																																				
HGO090418	4 R1/8																																																																				
HGO090618	6 R1/8																																																																				
HGO090818	8 R1/8																																																																				
HGO090614	6 R1/4																																																																				
HGO090814	8 R1/4																																																																				
HGO091014	10 R1/4																																																																				
HGO090838	8 R3/8																																																																				
HGO091038	10 R3/8																																																																				
HGO091238	12 R3/8																																																																				
HGO091212	12 R1/2																																																																				
HGO091512	15 R1/2																																																																				
<p>HGO14 Male lateral Tee</p> <table border="0"> <thead> <tr> <th></th> <th style="text-align: center;">Ø connection</th> </tr> </thead> <tbody> <tr><td>HGO140418</td><td>4 R1/8</td></tr> <tr><td>HGO140618</td><td>6 R1/8</td></tr> <tr><td>HGO140818</td><td>8 R1/8</td></tr> <tr><td>HGO140614</td><td>6 R1/4</td></tr> <tr><td>HGO140814</td><td>8 R1/4</td></tr> <tr><td>HGO141014</td><td>10 R1/4</td></tr> <tr><td>HGO141038</td><td>10 R3/8</td></tr> <tr><td>HGO141238</td><td>12 R3/8</td></tr> <tr><td>HGO141212</td><td>12 R1/2</td></tr> </tbody> </table>		Ø connection	HGO140418	4 R1/8	HGO140618	6 R1/8	HGO140818	8 R1/8	HGO140614	6 R1/4	HGO140814	8 R1/4	HGO141014	10 R1/4	HGO141038	10 R3/8	HGO141238	12 R3/8	HGO141212	12 R1/2	<p>HGO16 Male central Tee taper thread</p> <table border="0"> <thead> <tr> <th></th> <th style="text-align: center;">Ø connection</th> <th style="text-align: center;">Ø connection</th> </tr> </thead> <tbody> <tr><td>HGO160418</td><td>4 R1/8</td><td>HGO161014</td><td>10 R1/4</td></tr> <tr><td>HGO160618</td><td>6 R1/8</td><td>HGO161038</td><td>10 R3/8</td></tr> <tr><td>HGO160818</td><td>8 R1/8</td><td>HGO161238</td><td>12 R3/8</td></tr> <tr><td>HGO160614</td><td>6 R1/4</td><td>HGO161212</td><td>12 R1/2</td></tr> <tr><td>HGO160814</td><td>8 R1/4</td><td>HGO161512</td><td>15 R1/2</td></tr> </tbody> </table>		Ø connection	Ø connection	HGO160418	4 R1/8	HGO161014	10 R1/4	HGO160618	6 R1/8	HGO161038	10 R3/8	HGO160818	8 R1/8	HGO161238	12 R3/8	HGO160614	6 R1/4	HGO161212	12 R1/2	HGO160814	8 R1/4	HGO161512	15 R1/2	<p>HGO19 Intermediate straight</p> <table border="0"> <thead> <tr> <th></th> <th style="text-align: center;">Ø</th> </tr> </thead> <tbody> <tr><td>HGO190400</td><td>4</td></tr> <tr><td>HGO190600</td><td>6</td></tr> <tr><td>HGO190800</td><td>8</td></tr> <tr><td>HGO191000</td><td>10</td></tr> <tr><td>HGO191200</td><td>12</td></tr> <tr><td>HGO191500</td><td>15</td></tr> </tbody> </table>		Ø	HGO190400	4	HGO190600	6	HGO190800	8	HGO191000	10	HGO191200	12	HGO191500	15										
	Ø connection																																																																				
HGO140418	4 R1/8																																																																				
HGO140618	6 R1/8																																																																				
HGO140818	8 R1/8																																																																				
HGO140614	6 R1/4																																																																				
HGO140814	8 R1/4																																																																				
HGO141014	10 R1/4																																																																				
HGO141038	10 R3/8																																																																				
HGO141238	12 R3/8																																																																				
HGO141212	12 R1/2																																																																				
	Ø connection	Ø connection																																																																			
HGO160418	4 R1/8	HGO161014	10 R1/4																																																																		
HGO160618	6 R1/8	HGO161038	10 R3/8																																																																		
HGO160818	8 R1/8	HGO161238	12 R3/8																																																																		
HGO160614	6 R1/4	HGO161212	12 R1/2																																																																		
HGO160814	8 R1/4	HGO161512	15 R1/2																																																																		
	Ø																																																																				
HGO190400	4																																																																				
HGO190600	6																																																																				
HGO190800	8																																																																				
HGO191000	10																																																																				
HGO191200	12																																																																				
HGO191500	15																																																																				
<p>HGO20 Intermediate elbow</p> <table border="0"> <thead> <tr> <th></th> <th style="text-align: center;">Ø</th> </tr> </thead> <tbody> <tr><td>HGO200400</td><td>4</td></tr> <tr><td>HGO200600</td><td>6</td></tr> <tr><td>HGO200800</td><td>8</td></tr> <tr><td>HGO201000</td><td>10</td></tr> <tr><td>HGO201200</td><td>12</td></tr> </tbody> </table>		Ø	HGO200400	4	HGO200600	6	HGO200800	8	HGO201000	10	HGO201200	12	<p>HGO21 Intermediate Tee</p> <table border="0"> <thead> <tr> <th></th> <th style="text-align: center;">Ø</th> </tr> </thead> <tbody> <tr><td>HGO210400</td><td>4</td></tr> <tr><td>HGO210600</td><td>6</td></tr> <tr><td>HGO210800</td><td>8</td></tr> <tr><td>HGO211000</td><td>10</td></tr> <tr><td>HGO211200</td><td>12</td></tr> <tr><td>HGO211500</td><td>15</td></tr> </tbody> </table>		Ø	HGO210400	4	HGO210600	6	HGO210800	8	HGO211000	10	HGO211200	12	HGO211500	15	<p>HGO30 Nut</p> <table border="0"> <thead> <tr> <th></th> <th style="text-align: center;">Ø</th> <th style="text-align: center;">thread</th> <th style="text-align: center;">key</th> </tr> </thead> <tbody> <tr><td>HGO300400</td><td>4</td><td>8x1</td><td>10</td></tr> <tr><td>HGO300600</td><td>6</td><td>10x1</td><td>12</td></tr> <tr><td>HGO300800</td><td>8</td><td>12x1</td><td>14</td></tr> <tr><td>HGO301000</td><td>10</td><td>16x1</td><td>19</td></tr> <tr><td>HGO301200</td><td>12</td><td>18x1</td><td>22</td></tr> <tr><td>HGO301500</td><td>15</td><td>30x1</td><td>27</td></tr> </tbody> </table>		Ø	thread	key	HGO300400	4	8x1	10	HGO300600	6	10x1	12	HGO300800	8	12x1	14	HGO301000	10	16x1	19	HGO301200	12	18x1	22	HGO301500	15	30x1	27													
	Ø																																																																				
HGO200400	4																																																																				
HGO200600	6																																																																				
HGO200800	8																																																																				
HGO201000	10																																																																				
HGO201200	12																																																																				
	Ø																																																																				
HGO210400	4																																																																				
HGO210600	6																																																																				
HGO210800	8																																																																				
HGO211000	10																																																																				
HGO211200	12																																																																				
HGO211500	15																																																																				
	Ø	thread	key																																																																		
HGO300400	4	8x1	10																																																																		
HGO300600	6	10x1	12																																																																		
HGO300800	8	12x1	14																																																																		
HGO301000	10	16x1	19																																																																		
HGO301200	12	18x1	22																																																																		
HGO301500	15	30x1	27																																																																		
<p>HGO31 Olive</p> <table border="0"> <thead> <tr> <th></th> <th style="text-align: center;">Ø</th> </tr> </thead> <tbody> <tr><td>HGO310400</td><td>4</td></tr> <tr><td>HGO310600</td><td>6</td></tr> <tr><td>HGO310800</td><td>8</td></tr> <tr><td>HGO311000</td><td>10</td></tr> <tr><td>HGO311200</td><td>12</td></tr> <tr><td>HGO311500</td><td>15</td></tr> </tbody> </table>		Ø	HGO310400	4	HGO310600	6	HGO310800	8	HGO311000	10	HGO311200	12	HGO311500	15	<p>HGO32 Reinforcing core</p> <table border="0"> <thead> <tr> <th></th> <th style="text-align: center;">Ø1</th> </tr> </thead> <tbody> <tr><td>HGO320600</td><td>4</td></tr> <tr><td>HGO320800</td><td>6</td></tr> <tr><td>HGO321000</td><td>8</td></tr> <tr><td>HGO321200</td><td>10</td></tr> <tr><td>HGO321500</td><td>12,5</td></tr> </tbody> </table>		Ø1	HGO320600	4	HGO320800	6	HGO321000	8	HGO321200	10	HGO321500	12,5	<p>HGO33 Bulkhead connector</p> <table border="0"> <thead> <tr> <th></th> <th style="text-align: center;">Ø</th> </tr> </thead> <tbody> <tr><td>HGO330600</td><td>6</td></tr> <tr><td>HGO330800</td><td>8</td></tr> <tr><td>HGO331000</td><td>10</td></tr> <tr><td>HGO331200</td><td>12</td></tr> </tbody> </table>		Ø	HGO330600	6	HGO330800	8	HGO331000	10	HGO331200	12	<p>HGO40 Single banjo</p> <table border="0"> <thead> <tr> <th></th> <th style="text-align: center;">Ø connection</th> </tr> </thead> <tbody> <tr><td>HGO400618</td><td>6 G1/8</td></tr> <tr><td>HGO400818</td><td>8 G1/8</td></tr> <tr><td>HGO400614</td><td>6 G1/4</td></tr> <tr><td>HGO400814</td><td>8 G1/4</td></tr> </tbody> </table> <p>Bolt to be used: HD42 - HD43 - HD44</p>		Ø connection	HGO400618	6 G1/8	HGO400818	8 G1/8	HGO400614	6 G1/4	HGO400814	8 G1/4																				
	Ø																																																																				
HGO310400	4																																																																				
HGO310600	6																																																																				
HGO310800	8																																																																				
HGO311000	10																																																																				
HGO311200	12																																																																				
HGO311500	15																																																																				
	Ø1																																																																				
HGO320600	4																																																																				
HGO320800	6																																																																				
HGO321000	8																																																																				
HGO321200	10																																																																				
HGO321500	12,5																																																																				
	Ø																																																																				
HGO330600	6																																																																				
HGO330800	8																																																																				
HGO331000	10																																																																				
HGO331200	12																																																																				
	Ø connection																																																																				
HGO400618	6 G1/8																																																																				
HGO400818	8 G1/8																																																																				
HGO400614	6 G1/4																																																																				
HGO400814	8 G1/4																																																																				

CHARACTERISTICS

Temperature	-10 ÷ 80 °C
Fluid	compressed air
Max working pressure	12 bar
Body	nickel-plated brass, zinc-plated steel
Ferrule	nickel-plated brass, zinc-plated steel
Seals	NBR
Spring	nickel-plated brass, zinc-plated steel

<p>HGU2001M Universal male socket</p>  <p>connection HGU2001M14 G1/4 HGU2001M38 G3/8 HGU2001M12 G1/2</p>	<p>HGU2001F Universal female socket</p>  <p>connection HGU2001F14 G1/4 HGU2001F38 G3/8 HGU2001F12 G1/2</p>	<p>HGU2002M Universal male plug</p>  <p>connection HGU2002M14 G1/4 HGU2002M38 G3/8</p>
<p>HGU2002F Universal female plug</p>  <p>connection HGU2002F14 G1/4 HGU2002F38 G3/8</p>	<p>HGU1001M Male mini socket</p>  <p>connection HGU1001M18 G1/8 HGU1001M14 G1/4</p>	<p>HGU1001F Female mini socket</p>  <p>connection HGU1001F18 G1/8 HGU1001F14 G1/4</p>
<p>HGU1002M Male mini plug</p>  <p>connection HGU1002M18 G1/8 HGU1002M14 G1/4</p>	<p>HGU1002F Female mini plug</p>  <p>connection HGU1002F18 G1/8 HGU1002F14 G1/4</p>	

For further technical information contact our Sales Office

HE

HEA

Polyamide tubes PA10.12
Colors: neutral, black, blue, sky-blue

Part No.	Tube		
	Ø E	Ø I	R
HEA0420...	4	2	15
HEA0425...	4	2,5	20
HEA0604...	6	4	35
HEA0806...	8	6	40
HEA1008...	10	8	60
HEA1210...	12	10	85
HEA1412...	14	12	90

HEC

Polyurethane tubes Sh. A98
Colors: neutral, black, sky-blue

Part No.	Tube		
	Ø E	Ø I	R
HEC0420...	4	2	15
HEC0604...	6	4	20
HEC0806...	8	6	25
HEC1008...	10	8	35
HEC1209...	12	9	45

HED

Co-polyurethane tubes Sh. 55D
Colors: neutral, black, blue, sky-blue

Part No.	Tube		
	Ø E	Ø I	R
HED0420...	4	2,5	10
HED0604...	6	4	15
HED0806...	8	6	25
HED1008...	10	8	35
HED1209...	12	9	45

Ø E = External diameter (mm) Ø I = Internal diameter (mm) R = Bending radius (mm)

For color options, add the following suffixes to part no.:

NEU = Neutral NER = Black BLU = Blue AZZ = Sky-blue (example HEA0420NEU)

Min. package: 100 m coil

HF


HFA121015... and HFA121030...
available only blue and orange

HFA Rilsan® Spiral tubes

Polyamide Spiral Tubes PA10.12
Colors: neutral, blue, sky-blue, orange

Part No.	Tube			Spiral		
	Ø E	Ø I	Linear (mt)	Rest (mm)	Max Length (mt)	Ø I (mm)
HFA042010...	4	2	10	360	6	30
HFA042015...	4	2	15	550	9	30
HFA060415...	6	4	15	430	9	60
HFA060430...	6	4	30	870	17	60
HFA080615...	8	6	15	455	9	80
HFA080630...	8	6	30	910	17	80
HFA100815...	10	8	15	490	9	90
HFA100830...	10	8	30	990	17	90
HFA121015...	12	10	15	430	9	120
HFA121030...	12	10	30	870	17	120

HFC Elastollan® Spiral tubes with straight ends

Polyurethane Spiral Tubes (Sh.A98) with ends parallelling the spiral axis
Colors: neutral, sky-blue

Part No.	Tube			Spiral		
	Ø E	Ø I	Linear (mt)	Rest (mm)	Max Length (mt)	Ø I (mm)
HFC64C06...	6	4	6	380	4	25
HFC64C12...	6	4	12	760	8	25
HFC85C06...	8	5,5	6	310	4	40
HFC85C12...	8	5,5	12	640	8	40
HFC107C06...	10	7	6	330	4	50
HFC107C12...	10	7	12	680	8	50
HFC128C06...	12	8	6	320	4	60
HFC128C12...	12	8	12	660	8	60

Ø E = External diameter (mm) Ø I = Internal diameter (mm) End length 150 mm

For color options, add the following suffixes to part no.:

NEU = Neutral BLU = Blue AZZ = Sky-blue ARA = Orange

HD28

Tube cutter



Tube
HD280012 2÷12
HD280025 12÷25

DF



Other available versions
(M08-M12)

DF-220M08 DF-220M12
DF-330M08 DF-330M12
DF-440M08 DF-440M12
DF-770M08 DF-770M12

Cable extensions

DHF-033 M08 = 3 m M08
DHF-033 M12 = 3 m M12
DHF-053 M08 = 5 m M08
DHF-053 M12 = 5 m M12


Type	ELECTROMECHANICAL			ELECTRONIC PNP
Part No.	DF-220	DF-330	DF-440	DF-770
Working voltage (V AC/DC)	5÷30 V AC/DC	5÷30 V AC/DC	5÷30 V AC/DC	5÷30 V DC
Max switching voltage (mA)	100	100	100	100
Max switching power (W/VA)	3	3	3	3
Max voltage drop (V AC/DC)	<3,5	0,1	0,1	0,7
Minimum magnetic field (gauss)	60	60	60	30
Opening response time (ms)	< 0,5	< 0,5	< 0,5	0,08
Closing response time (ms)	< 1	< 1	< 1	0,03
Electric life with resistive load (cycles)	>10 ⁷	>10 ⁷	>10 ⁷	>10 ⁹
State indicator (LED)	red	red	red	red
Cable number and section (mmq)	2x0,14	3x0,14	3x0,14	3x0,14
Cable length (mm)	3000	3000	3000	3000
Electric circuit	A	C	D	C
Protection degree (EN60529)			IP67	
Working temperature (°C)			-20 ÷ +80	

Fixing elements



DH-M10DF DH-M20DF
DH-M12DF DH-M25DF
DH-M16DF

Fixing bracket for
M series cylinders




DF-001
Cable clamping




DHF-0020100
Covering strip

Electrical Circuit


A AC/DC 2 wires NO




C DC 3 wires PNP NO




D DC 3 wires PNP NC



M08




M12




ASSEMBLY SCHEME

1




Put the sensor in the proper groove and make sure that the fastening plate has the slot for screwdriver along the sensor axis.

2




Put the sensor inside its groove and make sure that the fastening plate is on the open part of the groove.

3



Check the correct position of the sensor in the groove.
Turn it to the wished position for detection.

4



Keep the sensor in its position and screw the fastening plate to fix the sensor in the groove.
Max torque: 0,5 ÷ 1 Nm

DH



Other available versions
(M08-M12)

DH-200M08 DH-200M12
DH-500M08 DH-500M12
DH-700M08 DH-700M12

Cable extensions

DHF-033 M08 = 3 m M08
DHF-033 M12 = 3 m M12
DHF-053 M08 = 5 m M08
DHF-053 M12 = 5 m M12

Type	ELECTROMECHANICAL			ELECTRONIC PNP
Part No.	KM-032000	DH-200	DH-500	DH-700
Working voltage (V AC/DC)	5÷250 V AC/DC	5÷250 V AC/DC	5÷250 V AC/DC	10÷30 V DC
Max switching voltage (mA)	1000	200	200	100
Max switching power (W/VA)	30	10	10	5
Max voltage drop (V AC/DC)	< 3,5	< 3,5	< 3,5	0,7
Minimum magnetic field (gauss)	85	85	60	30
Opening response time (ms)	< 0,5	< 0,5	< 0,5	0,08
Closing response time (ms)	< 1	< 1	< 1	0,03
Electric life with resistive load (cycles)	>10 ⁷	>10 ⁷	>10 ⁷	>10 ⁹
State indicator (LED)	red	red	red	red
Cable number and section (mmq)	2x0,25	2x0,25	2x0,25	3x0,25
Cable length (mm)	3000	3000	3000	3000
Electric circuit	A	A	A	C
Protection degree (EN60529)			IP65	
Working temperature (°C)			-20 ÷ +80	

Fixing elements


DH-M10 DH-M20
DH-M12 DH-M25
DH-M16

Fixing bracket for
M series cylinders



DH-K032050
DH-K063125
DH-K160200

Fixing bracket for
KE-K-KL series cylinders



KM-032050-1
KM-063100-1
KM-125000-1

Fixing bracket for KM
sensors on ISO cylinders
(upon request)



DH-S25
DH-S32
DH-S40
DH-S50

Fixing bracket for S1 series
rodless cylinders

DF-R/DF-T




Type	ELECTROMECHANICAL		ELECTRONIC PNP	
Part No.	DF-R200L02	DF-R200M08	DF-R700L02	DF-R700M08
Working voltage (V AC/DC)	5÷120 V AC/DC	5÷120 V AC/DC	5÷30 V DC	5÷30 V DC
Max switching voltage (mA)	100	100	50	50
Max switching power (W/VA)	10	10	1,5	1,5
Shock resistance (G)	30	30	50	50
Max voltage drop (V AC/DC)	2,5	2,5	1,5	1,5
Cable number and section (mmq)	2 x 2,8 (PUR)	2 x 2,8 (PUR)	3x3 (PUR)	3x3 (PUR)
Cable length (mm)	2000	150	2000	150
Contact	NO	NO	NO	NO
Max response time (ms)	1	1	1	1
State indicator (LED)	red	red	green	green
Electric circuit	A	-	C	-
Protection degree (NEMA 6)			IP67	
Working temperature (°C)			-10 ÷ +70	



Type	ELECTROMECHANICAL		ELECTRONIC PNP	
Part No.	DF-T200L03	DF-T200M08	DF-T700L03	DF-T700M08
Working voltage (V AC/DC)	5÷120 V AC/DC	5÷120 V AC/DC	5÷30 V DC	5÷30 V DC
Max switching voltage (mA)	100	100	200	200
Max switching power (W/VA)	10	10	6	6
Shock resistance (G)	30	30	50	50
Max voltage drop (V AC/DC)	2,5	2,5 V	1	1
Cable number and section (mmq)	2 x 2,8 (PUR)	2 x 2,8 (PUR)	3 x 2,8 (PUR)	3 x 2,8 (PUR)
Cable length (mm)	3000	150	3000	150
Contact	NO	NO	NO	NO
Max response time (ms)	1	1	1	1
Protection degree (NEMA 6)	red	red	green	green
Electric circuit	A	-	C	-
State indicator (LED)			IP67	
Working temperature (°C)			-10 ÷ +70	


Electrical Circuit

A AC/DC 2 wires NO




BRN = Brown BLK = Black BLU = Blue

C DC 3 wires PNP NO




M8



OUT(4) (3)0V (1)+VDC

M12



OUT(4) (3)0V (1)+VDC

6

Power Clamps



	Pneumatic Power clamps	UBP/UBH IBP/IBM UBS UDP UBM/UBQ UBT UFL/UHL UNP/UNM DMS	4/5
	Retractable locating pin units	LCP/LCM LCG LCZ/LCY LCT/LCX LCA/LCO LCL	5/6
	Pin clamps	LSP LTP LUP LSL	6
	Gripper units	UGP UGM LGP	7
	Power pivots	DMA LAGP	7
	Marking units	PRP	7
	Electrical units	LAE LNE LGE LCE LAGE	8
	Accessories	CLAMPING ARMS UBK UBF DF Electronic sensor	8

**STEPLESS ADJUSTMENT**

Opening angle adjustment 0 ÷ 135°

LIGHT-WEIGHT

Clamping arm and clamp housing in aluminium alloy

UNIVER ORIGINAL LINKAGE DESIGN

Ensures positional repeatability

UNIVER ORIGINAL METAL SENSOR

Metal case

M12 swivel connector

UNIVER power clamps meet the requirements of the Automotive and sheet metal industries; they are mostly used for sheet metal handling, BIW applications and welding fixtures production.



CNOMO clamps' applications





Pneumatic power clamps' applications



Electric power pivots' applications



Our customers

Pneumatic power clamps

■ UBP

UNIVERSAL Pneumatic power clamp

Ø32
NEW



Ø Cylinder mm: 32 - 40 - 50 - 63 - 80
Fully adjustable opening angle

■ UBH

UNIVERSAL Pneumatic power clamp

Ø Cylinder mm: 40 - 63
Fully adjustable opening angle

■ IBP

Pneumatic power clamp interchangeable with size 50/63 mm



Ø Cylinder mm: 40
Fully adjustable opening angle

■ UBS

Safety pneumatic power clamp



Ø Cylinder mm: 40
In case of emergency (= no air) the safety clamp closes automatically

■ UDP

Pneumatic power clamp with 2 arms



Ø Cylinder mm: 40
Fully adjustable opening angle



Ø Cylinder mm: 63
Fully adjustable opening angle

■ UBM

UNIVERSAL Pneumatic power clamp with handlever



Ø Cylinder mm: 40 - 50 - 63 - 80
Fully adjustable opening angle

■ IBM

Pneumatic power clamp with handlever interchangeable with size 50/63 mm



Ø Cylinder mm: 40
Fully adjustable opening angle

■ UBQ

Pneumatic power clamp with handlever



Ø Cylinder mm: 40 - 63
Fully adjustable opening angle

■ UBT

Pneumatic power clamp with central handlever



Ø Cylinder mm: 40
Fully- adjustable opening angle

■ UFL - UHL

Manual power clamps



Without pneumatic cylinders

Clamps conforming to the NAAMS and CNOMO standard

UNP

UNIVERSAL Pneumatic power clamps conforming to the N.A.A.M.S. Standard



Ø Cylinder mm: 50 - 63 - 80
Fully adjustable opening angle

UNM

UNIVERSAL Pneumatic power clamps with handlever conforming to the N.A.A.M.S. Standard



Ø Cylinder mm: 50 - 63
Fully adjustable opening angle

DMS

Pneumatic power clamps conforming to the CNOMO Standard



Ø Cylinder mm: 32 - 40 - 50 - 63
Fully adjustable opening angle

Retractable locating pin units, single and double rod

LCP

Pneumatic retractable locating pin units with single rod



LCP32
Ø Cylinder mm: 32
Stroke mm: 20 - 40



LCP50
Ø Cylinder mm: 50
Stroke mm: 15 - 25 - 40 - 50 - 60 - 75 - 100 - 110



LCP63
Ø Cylinder mm: 63
Versions: 15 - 25 - 40 - 50 - 60

LCG

Pneumatic retractable locating pin units, conforming to the CNOMO Standard, with single rod



Ø Cylinder mm: 50 - 63
Stroke mm: 25 - 50

**LCZ**

Pneumatic retractable locating pin units with single rod and toggle-joint mechanism

**LCJ**

Pneumatic retractable locating pin units, with improved pull force

NEW

Ø Cylinder mm: 50
Stroke mm: 25 - 40 - 60

LCA

Pneumatic retractable locating pin units with double rod



Ø Cylinder mm: 40
Stroke mm: 20 - 40



Ø Cylinder mm: 63
Stroke mm: 25 - 40 - 50 - 60

**LCT**

Pneumatic retractable locating pin units with double rod and toggle-joint mechanism

Retractable locating pin units with handlever

LCM

Pneumatic retractable locating pin unit with hand lever



Ø Cylinder mm: 50
Stroke mm: 25 - 40 - 50 - 60

LCL

Manual retractable locating pin unit



Stroke mm: 15 - 25 - 40 - 50 - 60
Without pneumatic cylinders

LCO

Pneumatic retractable locating pin unit with two rods and hand lever



Ø Cylinder mm: 50
Stroke mm: 40

LCY

Pneumatic retractable locating pin unit with hand lever and toggle-joint mechanism



Ø Cylinder mm: 40
Stroke mm: 40

LCX

Pneumatic retractable locating pin unit with two rods and hand lever and toggle-joint mechanism



Ø Cylinder mm: 50
Stroke mm: 40

Pneumatic pin clamps

LSP

Pneumatic pin clamp



Ø Cylinder mm: 32 - 50

LSP50U

Pneumatic pin clamp- horizontal shape

**LTP**

Pneumatic pin clamp with vanishing hook



Ø Cylinder mm: 50

LUP

Pneumatic pin clamp with vanishing hook and pin



Ø Cylinder mm: 63

LSL

Manual pin clamp



Multiple pin sizes available

Gripper units

■ UGP

Pneumatic gripper units



Ø Cylinder mm: 40

Versions: single and double jaws movement
Fully adjustable opening angle

■ UGM

Pneumatic gripper unit with hand lever



Ø Cylinder mm: 40

Versions: single and double jaws movement
Fully adjustable opening angle

■ LGP

Pneumatic gripper



NEW

Ø Cylinder mm: 32 - 40

Versions: single and double jaws movement

Power pivots

■ DMA

Pneumatic power pivots, CNOMO mounting



Ø Cylinder mm: 63

Fully adjustable opening angle

■ LAGP

Pneumatic power pivots



Ø Cylinder mm: 63 - 80 - 100 - 125 - 160 - 200

Size: 63-75-80-120-155-150-170-210-300

350 - 600 - 605

Brake system

Marking unit

■ PRP

Pneumatic marking unit



PRP025 - PRP050

Ø Cylinder mm: 63

Versions: single letter/number



PRP500

Ø Cylinder mm: 100

Versions: up to 7 letters/numbers marking

The marking head can be mounted on the lower mounting surface or on the upper moving arms



NEW

PRP1100

Ø Cylinder mm: 160

Versions: up to 8 letters/numbers marking

The marking head can be mounted on the lower mounting surface or on the upper moving arms

Electric unit with modular electronics

LAE

Electric power clamps

**Size:** 140 - 225 - 350 - 950

Adjustable opening angle

Built in "obstruction" detection

LNE

Electric power clamps, fixing conforming to the N.A.A.M.S. Standard

**Size:** 225 - 350

Adjustable opening angle

Built in "obstruction" detection

LGE

Electric gripper units

**Size:** 140

Adjustable opening angle

Built in "obstruction" detection

LCE

Electric retractable locating pin unit

**Size:** 350

Adjustable stroke

LAGE

Electric power pivots

**Size:** 500 - 1000

Control module can be mounted remotely

The Integrated brake maintains the position any time power is lost

Accessories

Clamping arms

Wishbone/Blade Arms conforming to the DIN or N.A.A.M.S. Standard

**Offset mm:** 0 - 15 - 25 - 45 - 50 - 70 - 75 - 105 - 120**UBK**

Self-holding spring for open position

**UBF**

Ergonomic Handlevers

**DF Electronic sensor**

7

GR8 Tooling




Modular Tooling System GR8

2



GR8 Modular Tooling System

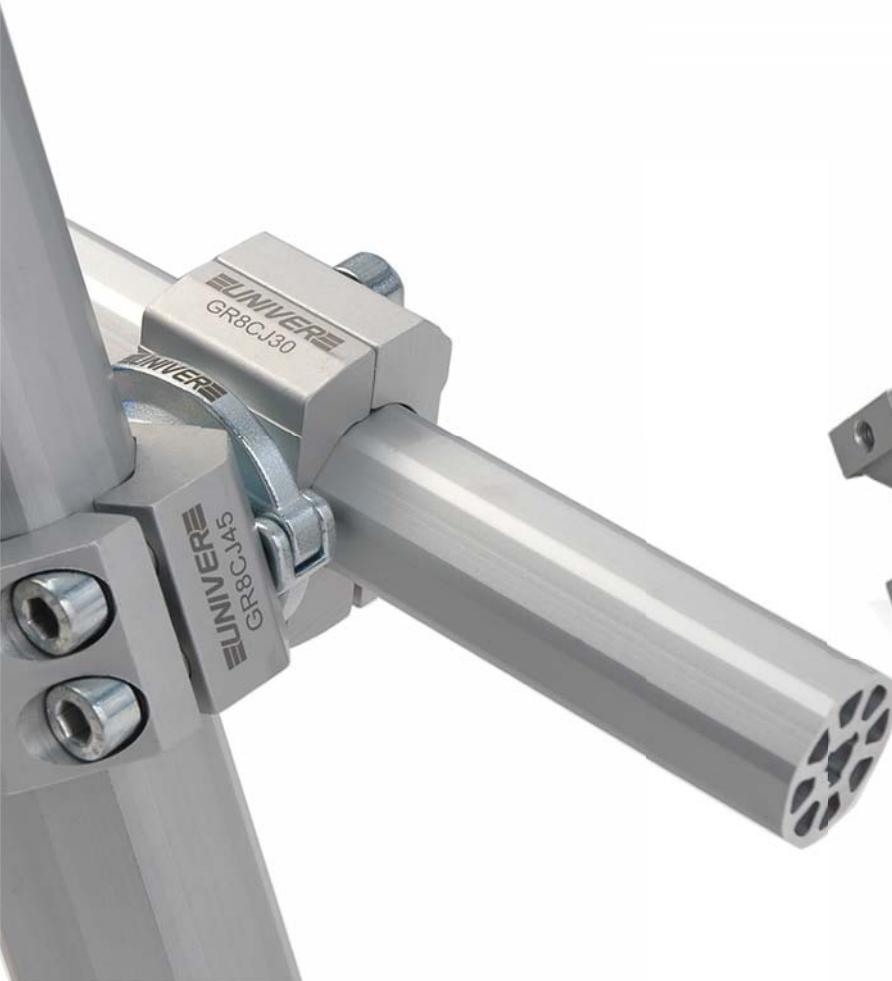


KIT


Considerable reduction of
mounting elements

Ø 30 - 45 - 70 mm booms

Maximum stiffness and minimum weight

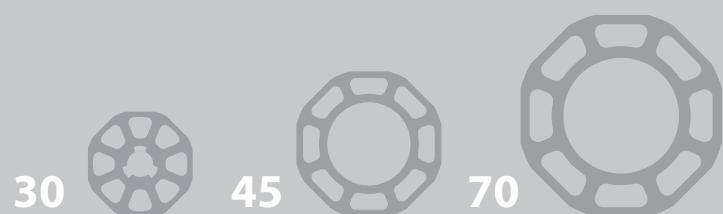

PATENT PENDING

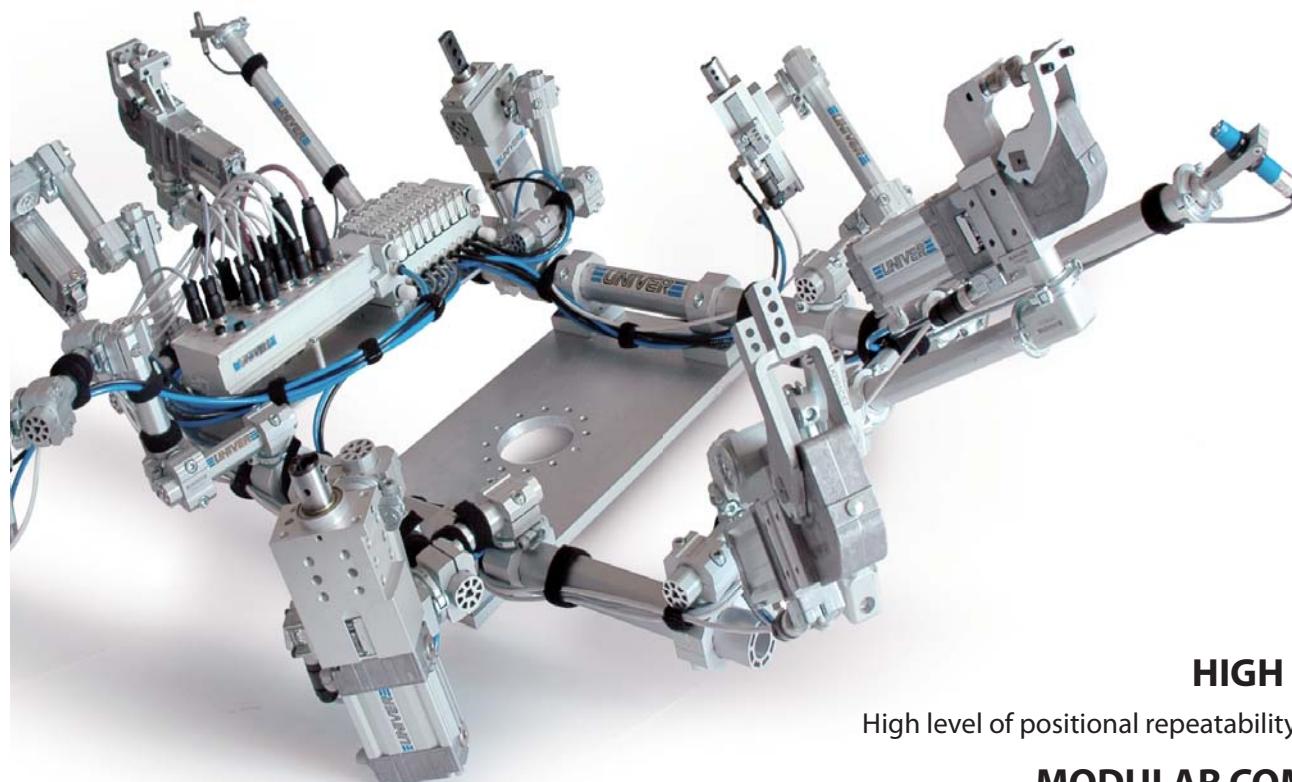**HIGH PRECISION**

High level of positional repeatability; low deflection

MODULAR COMPONENTS

Considerable reduction of mounting components

QUICK INSTALLATION AND SET UP


No welding or doweling required,
easily replaceable components

FULLY ADJUSTABLE


Unlimited orientation in space and free configuration

Locking ring

Precise and efficient system to guarantee a high level of positional accuracy

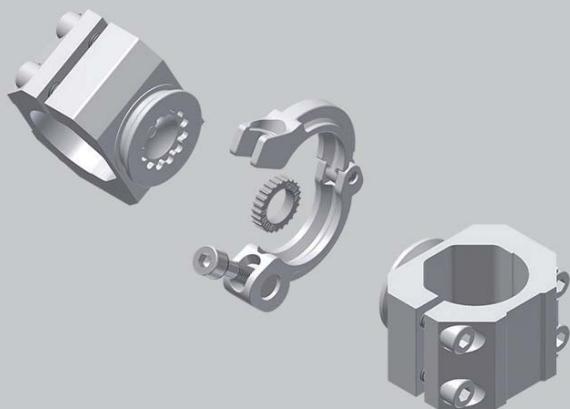**Ball mounting**

Unlimited swivel rotation


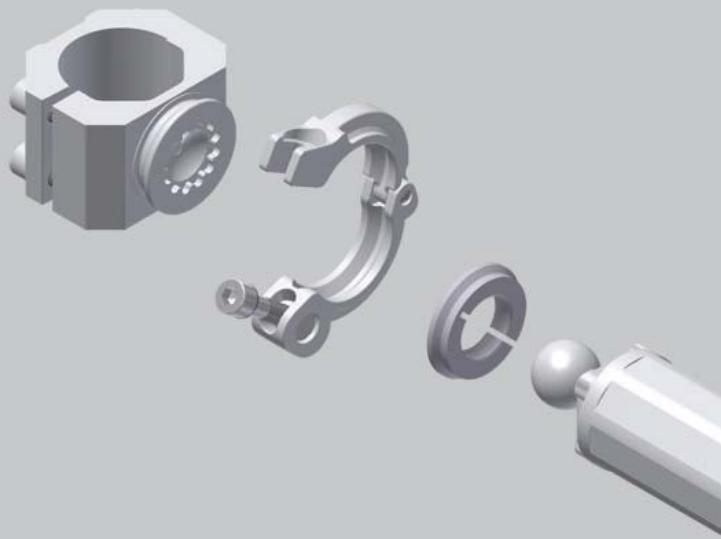


Booms	Inserts	Locking ring
<p>GR8B30S6000 Ø 30 mm Octagonal boom</p>	<p>GR8B456000 Ø 45 mm Octagonal boom</p>	<p>GR8B706000 Ø 70 mm Octagonal boom</p>

7

Booms end caps		
<p>GR8C30 30 mm boom end cap</p>	<p>GR8C45 45 mm boom end cap</p>	<p>GR8C70 70 mm boom end cap</p>

Mounts			
<p>GR8CJ30D Octagonal Joint 30</p>	<p>GR8RJ30D Round Joint 30</p>	<p>GR8CJ45D Octagonal Joint 45</p>	<p>GR8RJ45D Round Joint 45</p>
<p>GR8CJ70D Octagonal Joint 70</p>	<p>GR8RJ70 Round Joint 70</p>	<p>GR8HD4530V Cross Joint 45-30</p>	<p>GR8HD4545V Cross Joint 45-45</p>
<p>GR8HD7045 Cross Joint 70-45</p>	<p>GR8HD7070 Cross Joint 70-70</p>	<p>GR8CM4530 Coplanar Mount 45-30</p>	<p>GR8CM4545 Coplanar Mount 45-45</p>


GR8CM7045 Coplanar Mount 70-45	GR8CM7070 Coplanar Mount 70-70	GR8SCI30D Interlocking adapter 30	GR8ECI45D Interlocking adapter 45
			


Angular Mounts

GR8EOAD Oriental angle adapter	GR8EOAD45 Oriental angle adapter	GR8SM3030 Edge mounting element 30-30	GR8SM4545 Edge mounting element 45-45
			





GR8A30 Edge mount with an orientable side for 30 mm booms	GR8A45 Edge mount with an orientable side for 45 booms	GR8A3045 45° Mounting element male-female for 30 mm booms	GR8SM3045 Mounting element for 30 mm booms
			

Base Mounts

GR8BB30D Base plate bracket 30	GR8BB45D Base plate bracket 45	GR8BB70 Base plate bracket 70	GR8BL45 Base linear plate 45
			

GR8BC30 Base connector 30	GR8BC45 Base connector 45	GR8BC70 Base connector 70	GR8BL70 Base linear plate 70
			

Mounting adapters

<p>GR8SR40 Rear mount plate for 40 clamps</p> 	<p>GR8SR50 Rear mount plate for retractable locating pin units LCP50</p> 	<p>GR8SR50M8 Rear mount plate with M8 threads</p> 	<p>GR8SS50 Side mount plate for retractable locating pin units LCP50</p> 
<p>GR8SR40D Mount plate for size 40 clamps</p> 	<p>GR8SR50D Rear mount plate for retractable locating pin units LCP50</p> 	<p>GR8SR50M8D Rear mount plate with M8 threads</p> 	<p>GR8SS50D Side mount plate for retractable locating pin units LCP50</p> 
<p>GR8MF40AD Interlocking adapter</p> 	<p>GR8MF40D Front mount plate for size 40 clamps</p> 	<p>GR8MF50D Front mount plate for size 50 clamps</p> 	<p>GR8MFGLD Front mount plate for UGP40VL</p> 
<p>GR8MP12D Proximity mount with 12 mm inner Ø</p> 	<p>GR8MP18D Proximity mount with 18 mm inner Ø</p> 	<p>GR8MP19D Vacuum cup adapter with 19 mm inner Ø</p> 	<p>GR8MP30D Proximity mount with 30 mm inner Ø</p> 




Mounts for LGP32-40

GR8LGP32MO25 Orbital mount - 360° unlimited rotation - Ball Ø 25 mm	GR8LGP32MO30 Orbital mount - 360° unlimited rotation - Ball Ø 30 mm	GR8LGP32MP Middle flange mount Ø 32	GR8LGP40MO25 Orbital mount - 360° unlimited rotation - Ball Ø 25 mm
			
GR8LGP40MO30 Orbital mount - 360° unlimited rotation - Ball Ø 30 mm	GR8LGP40MO45 Orbital mount - 360° unlimited rotation - Ball Ø 45 mm	GR8LGP40MP Middle flange mount Ø 40	
			
GR8LGP40AF Middle angular mount	GR8LGP40A025 Ø 25 angular mount	GR8LGP40A030 Ø 30 angular mount	GR8LGP40A045 Ø 45 angular mount
			




GR8

GR8 applications and details
of the components

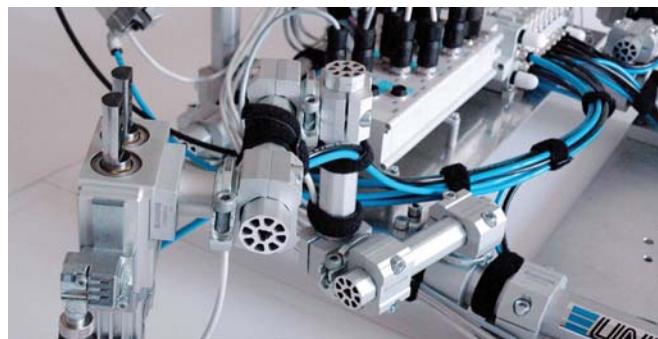

Unlimited and complex configurations
Weight-optimized standard components and brackets
Quick installation and adjustment

COMPLETE SOLUTION
WITH **UNIVER** COMPONENTS

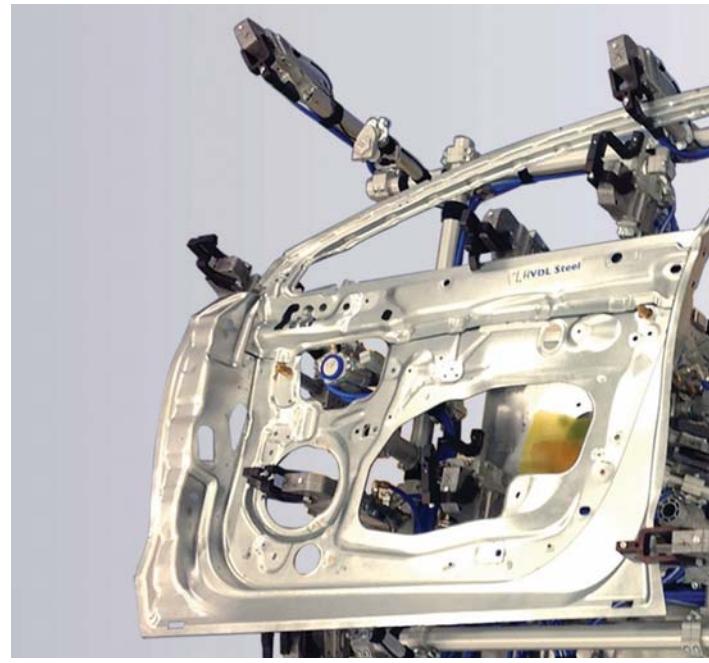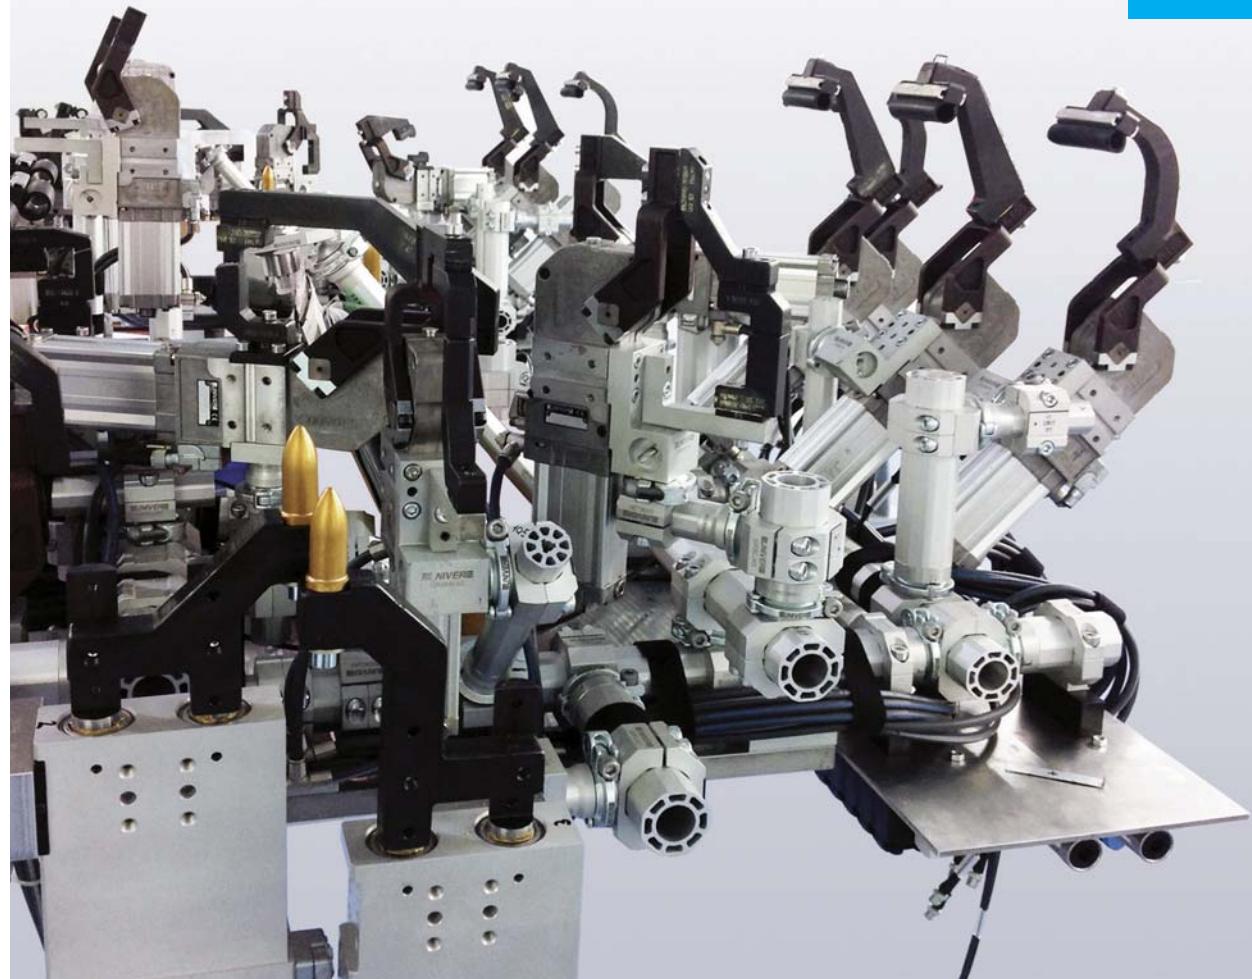



**Compliance with
International
Standards**

DIRECTIVE 94/9/CE "ATEX"

Directive that specifies the safety requirements for equipment/components for use in potentially explosive atmospheres

PRODUCT CERTIFICATION "CSA"

Product Safety certification for the North American market

DIRECTIVE 2011/65/CE "RoHS"

Directive which regulates the use and disposal of hazardous substances in electrical and electronic equipment and their waste disposal.

DIRECTIVE 2012/19/UE "WEEE"

Directive on waste electrical and electronic equipment.

DIRECTIVE "REACH"

CE 1907/2006 of the European Parliament and the Council concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals.

DIRECTIVE 97/23/CE "PED"

Directive which applies to the design, manufacture and conformity assessment of pressure equipment and assemblies with a maximum allowable pressure greater than 0.5 bar.

DIRECTIVE 2006/42/CE "MACHINERY"

Directive defining essential health and safety requirements for the design, construction, installation and maintenance of machinery.

**ISO 9001:2012
"QUALITY MANAGEMENT SYSTEM"**

Standard specifying Quality Management System requirements.



For further information contact our Sales Office or visit our website
www.univer-group.com

PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE
A-101N	3.8	AC-7013	3.48	AG-3001	3.54	AI-3511Q	3.88	AI-9030	3.57
A-102N	3.8	AC-7013P	3.48	AG-3002	3.54	AI-3512	3.88	AI-9030M	3.57
A-111N	3.8	AC-7100	3.48	AG-3009	3.54	AI-3512Q	3.88	AI-9100	3.57
A-112N	3.8	AC-7120	3.48	AG-3010	3.54	AI-3513	3.88	AI-9100M	3.57
A-121N	3.8	AC-7500	3.49	AG-3011	3.54	AI-3513Q	3.88	AI-9110	3.57
A-122N	3.8	AC-7520	3.49	AG-3012	3.54	AI-3514	3.88	AI-9110M	3.57
A-131N	3.8	AC-7900	3.49	AG-3020	3.54	AI-3514D	3.88	AI-9120	3.57
A-141N	3.8	AC-7905	3.49	AG-3021	3.54	AI-3514Q	3.88	AI-9120M	3.57
A-142N	3.8	AC-8010	3.48	AG-3040	3.54	AI-3514QD	3.88	AI-9130	3.57
A-151N	3.8	AC-8013	3.48	AG-3041	3.54	AI-3515	3.88	AI-9130M	3.57
A-161N	3.8	AC-8013P	3.48	AG-3050	3.54	AI-3515Q	3.88	AI-9200	3.57
A-162N	3.8	AC-8100	3.48	AG-3051	3.54	AI-3516	3.88	AI-9200M	3.57
A-171N	3.8	AC-8120	3.48	AG-3062	3.54	AI-3516D	3.88	AI-9210	3.57
A-299-11	3.8	AC-8500	3.49	AG-3063	3.54	AI-3516Q	3.88	AI-9210M	3.57
A-301	3.8	AC-8520	3.49	AG-3071	3.54	AI-3516QD	3.88	AI-9220	3.57
A-305	3.8	AC-8900	3.49	AG-3072	3.54	AI-3517	3.88	AI-9220M	3.57
A-326A/B/D	3.8	AC-9010	3.48	AG-3073	3.54	AI-3517Q	3.88	AI-9230	3.57
A-345	3.8	AC-9013	3.48	AG-3074	3.54	AI-3519	3.88	AI-9230M	3.57
A-350	3.8	AC-9013P	3.48	AG-3075	3.54	AI-3519Q	3.88	AI-9300	3.58
AA-0150	3.9	AC-9100	3.48	AG-3076	3.54	AI-3520	3.89	AI-9300M	3.58
AA-0157	3.9	AC-9120	3.48	AG-3081	3.55	AI-3520Q	3.89	AI-9310	3.58
AA-0170	3.9	AC-9500	3.49	AG-3082	3.55	AI-3521	3.89	AI-9310M	3.58
AA-0184	3.9	AC-9520	3.49	AG-3091	3.55	AI-3521Q	3.89	AI-9320	3.58
AA-0186	3.9	AC-N8100	3.22	AG-3092	3.55	AI-3522	3.89	AI-9320M	3.58
AA-0188	3.9	AC-N8120	3.22	AG-3100	3.55	AI-3522Q	3.89	AI-9330	3.58
AA-0211	3.9	AC-N8500	3.22	AG-3101	3.55	AI-3523	3.89	AI-9330M	3.58
AA-0213	3.9	AC-N8520	3.22	AG-3110	3.55	AI-3523Q	3.89	AI-9350	3.58
AA-0219	3.9	AE-1000	3.15	AG-3111	3.55	AI-3524	3.88	AI-9350M	3.58
AA-0231	3.9	AE-1003	3.15	AG-3210	3.55	AI-3524Q	3.88	AI-9360	3.58
AA-0233	3.9	AE-1009	3.15	AG-3211	3.55	AI-3525	3.89	AI-9360M	3.58
AA-0239	3.9	AE-1010	3.15	AG-3214	3.55	AI-3525Q	3.89	AI-9370	3.58
AA-0400	3.9	AE-1100	3.15	AG-3215	3.55	AI-3526	3.89	AI-9370M	3.58
AA-0400U	3.9	AE-1103	3.15	AG-3222	3.55	AI-3526Q	3.89	AI-9380	3.58
AA-0402	3.9	AE-1120	3.15	AG-3223	3.55	AI-3529	3.89	AI-9380M	3.58
AA-0404	3.9	AE-1121	3.15	AG-3232	3.55	AI-3550	3.89	AI-9400	3.58
AA-0450	3.9	AF-2500	3.52	AG-3233	3.55	AI-3551	3.89	AI-9400M	3.58
AB-0600	3.10	AF-2501	3.52	AG-3242	3.55	AI-3560	3.89	AI-9410	3.58
AB-0613	3.10	AF-2510	3.52	AG-3243	3.55	AI-3562	3.89	AI-9410M	3.58
AB-0640	3.10	AF-2511	3.52	AG-3256	3.55	AI-3563	3.89	AI-9420	3.58
AB-0643	3.10	AF-2517	3.52	AG-3257	3.55	AI-3570	3.89	AI-9420M	3.58
AB-0681	3.10	AF-2518	3.52	AG-3300	3.55	AI-3571	3.89	AI-9430	3.58
AB-0685	3.10	AF-2520	3.52	AG-3301	3.55	AI-3572	3.89	AI-9430M	3.58
AB-0687	3.10	AF-2521	3.52	AG-3302	3.55	AI-35B10N	3.59	AI-9500B	3.59
AB-0722	3.10	AF-2524	3.52	AG-3303	3.55	AI-35B10R	3.59	AI-9500BM	3.59
AB-0728	3.10	AF-2525	3.52	AG-3310	3.55	AI-35B10V	3.59	AI-9510B	3.59
AB-0751	3.10	AF-2530	3.52	AG-3311	3.55	AI-35B11N	3.59	AI-9510BM	3.59
AB-0755	3.10	AF-2531	3.52	AG-3312	3.55	AI-35B11R	3.59	AI-9520B	3.59
AB-0757	3.10	AF-2540	3.52	AG-3313	3.55	AI-35B11V	3.59	AI-9520BM	3.59
AB-0765	3.10	AF-2541	3.52	AG-3320	3.55	AI-35B13N	3.59	AI-9550B	3.59
AB-0771	3.10	AF-2545	3.52	AG-3321	3.55	AI-35B13R	3.59	AI-9550BM	3.59
AB-0819	3.10	AF-2546	3.52	AG-3322	3.55	AI-35B20	3.59	AI-9560B	3.59
AB-0822	3.10	AF-2550	3.53	AG-3330	3.55	AI-35B21	3.59	AI-9560BM	3.59
AB-0824	3.10	AF-2551	3.53	AG-3331	3.55	AI-35B22	3.59	AI-9570B	3.59
AB-0825	3.10	AF-2552	3.53	AG-3332	3.55	AI-35B25	3.59	AI-9570BM	3.59
AB-0826	3.10	AF-2561	3.52	AI-3500	3.56	AI-35B26	3.59	AM-5000	3.60
AB-0827	3.10	AF-2565	3.52	AI-3500Q	3.56	AI-35B27	3.59	AM-5000A	3.60
AB-0828	3.10	AF-2600	3.52	AI-3500S	3.56	AI-35B30	3.59	AM-5001	3.60
AB-0829	3.10	AF-2601	3.52	AI-3500SQ	3.56	AI-35B31	3.59	AM-5001A	3.60
AB-0830	3.10	AF-2603	3.53	AI-3501	3.56	AI-35B32	3.59	AM-5002	3.60
AB-0831	3.10	AF-2606	3.52	AI-3501Q	3.56	AI-3610	3.56	AM-5003	3.60
AB-0832	3.10	AF-2610	3.53	AI-3501S	3.56	AI-3612	3.56	AM-5003A	3.60
AB-0833	3.10	AF-2615	3.53	AI-3501SQ	3.56	AI-9000	3.57	AM-5004	3.60
AB-0885	3.10	AF-2617	3.53	AI-3502	3.56	AI-9000M	3.57	AM-5004A	3.60
AB-0886	3.10	AF-2620	3.53	AI-3502Q	3.56	AI-9010	3.57	AM-5005	3.60
AB-0888	3.10	AF-2700	3.52	AI-3503	3.56	AI-9010M	3.57	AM-5011	3.60
AB-0900	3.10	AF-2701	3.52	AI-3503Q	3.56	AI-9020	3.57	AM-5012	3.60
AC-7010	3.48	AF-2706	3.52	AI-3511	3.88	AI-9020M	3.57	AM-5015	3.60



PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE
AM-5021	3.60	AM-5402	3.93	BDA-4833	3.19	BDF-4180	3.20	BE-4200	3.12
AM-5031	3.60	AM-5500	3.93	BDA-4844	3.19	BDF-4185	3.20	BE-4205	3.12
AM-5041	3.60	AM-5501	3.93	BDB-324024	3.18	BDF-4210	3.20	BE-4700	3.12
AM-5043	3.60	AM-5502	3.93	BDB-324124	3.18	BDF-4211	3.21	BE-4720	3.12
AM-5043B	3.60	AM-5503	3.93	BDB-324424	3.18	BDF-4212	3.21	BE-4730	3.12
AM-5043C	3.60	AM-5504	3.93	BDB-334424	3.18	BDF-4220	3.20	BE-4760	3.12
AM-5043D	3.60	AM-5510	3.93	BDB-344424	3.18	BDF-4221	3.21	BE-4800	3.12
AM-5050	3.60	AM-5511	3.93	BDB-354424	3.18	BDF-4222	3.21	BE-4850	3.12
AM-5051	3.60	AM-5512	3.93	BDB-364424	3.18	BDF-4230	3.20	BE-4870	3.12
AM-5052	3.60	AM-5513	3.93	BDB-374424	3.18	BDF-4231	3.21	BE-4900	3.12
AM-5060	3.92	AM-5514	3.93	BDB-384424	3.18	BDF-4232	3.21	BE-4940	3.12
AM-5061	3.92	AP-500	3.92	BDB-424024	3.18	BDF-4310	3.20	BE-5000	3.12
AM-5062	3.92	AP-520	3.92	BDB-424124	3.18	BDF-4311	3.21	BE-5020	3.12
AM-5063	3.92	AZ-0200	4.12	BDB-424424	3.18	BDF-4312	3.21	BE-5030	3.12
AM-5064	3.92	AZ4-SN003A	3.63	BDB-434424	3.18	BDF-4320	3.20	BE-5060	3.12
AM-5065	3.92	AZ4-SN004A	3.39	BDB-444424	3.18	BDF-4321	3.21	BE-5100	3.12
AM-5066	3.92	AZ4-VN0310	3.63	BDB-454424	3.18	BDF-4322	3.21	BE-5150	3.12
AM-5067	3.92	AZ4-VN0414	3.73	BDB-464424	3.18	BDF-4330	3.20	BE-5170	3.12
AM-5070	3.92	B-101N	3.7	BDB-474424	3.18	BDF-4331	3.20	BE-5200	3.12
AM-5071	3.92	B-102N	3.7	BDB-484424	3.18	BDF-4332	3.20	BE-5205	3.12
AM-5072	3.92	B10-401L24D	3.4	BDE-324024	3.18	BDF-4400	3.20	BE-5700	3.12
AM-5074	3.92	B10-403P24D	3.4	BDE-324124	3.18	BE12-3000	3.13	BE-5720	3.12
AM-5076	3.92	B10-405M24D	3.4	BDE-324424	3.18	BE12-3020	3.13	BE-5730	3.12
AM-5077	3.92	B11-401L24D	3.3	BDE-334424	3.18	BE12-3205	3.13	BE-5760	3.12
AM-5090	3.92	B11-403P24D	3.3	BDE-344424	3.18	BE12-3700	3.13	BE-5800	3.12
AM-5091	3.92	B11-405M24D	3.3	BDE-354424	3.18	BE12-3720	3.13	BE-5850	3.12
AM-5092	3.92	B11-411L24D	3.3	BDE-364424	3.18	BE12-3900	3.13	BE-5870	3.12
AM-5109	3.87	B11-413P24D	3.3	BDE-374424	3.18	BE12-3940	3.13	BE-5900	3.12
AM-5110	3.87	B11-415M24D	3.3	BDE-384424	3.18	BE12-4000	3.13	BE-5940	3.12
AM-5111	3.87	B-121N	3.7	BDE-424024	3.18	BE12-4020	3.13	BE-6000	3.12
AM-5148	3.29	B12-401L24D	3.5	BDE-424124	3.18	BE12-4205	3.13	BE-6020	3.12
AM-5151	3.29	B12-403P24D	3.5	BDE-424424	3.18	BE12-4700	3.13	BE-6030	3.12
AM-5152	3.29	B12-405M24D	3.5	BDE-434424	3.18	BE12-4720	3.13	BE-6060	3.12
AM-5160	3.92	BDA-3230	3.19	BDE-444424	3.18	BE12-4900	3.13	BE-6100	3.12
AM-5161	3.92	BDA-3231	3.19	BDE-454424	3.18	BE12-4940	3.13	BE-6150	3.12
AM-5162	3.92	BDA-3233	3.19	BDE-464424	3.18	BE12-5000	3.13	BE-6170	3.12
AM-5163	3.92	BDA-3240	3.19	BDE-474424	3.18	BE12-5020	3.13	BE-6200	3.12
AM-5164	3.92	BDA-3241	3.19	BDE-484424	3.18	BE12-5205	3.13	BE-6205	3.12
AM-5200	3.93	BDA-3244	3.19	BDF-3100	3.20	BE12-5700	3.13	BE-6700	3.12
AM-5211A	3.9	BDA-3333	3.19	BDF-3110	3.21	BE12-5720	3.13	BE-6720	3.12
AM-5211B	3.9	BDA-3344	3.19	BDF-3115	3.20	BE12-5900	3.13	BE-6730	3.12
AM-5212A	3.10	BDA-3433	3.19	BDF-3120	3.20	BE12-5940	3.13	BE-6760	3.12
AM-5212B	3.10	BDA-3444	3.19	BDF-3125	3.21	BE-3000	3.12	BE-6800	3.12
AM-5213A	3.9	BDA-3533	3.19	BDF-3140TIM	3.20	BE-3020	3.12	BE-6850	3.12
AM-5214A	3.10	BDA-3544	3.19	BDF-3180	3.20	BE-3030	3.12	BE-6870	3.12
AM-5220	3.93	BDA-3633	3.19	BDF-3185	3.20	BE-3060	3.12	BE-6900	3.12
AM-5240	3.93	BDA-3644	3.19	BDF-3190	3.20	BE-3100	3.12	BE-6940	3.12
AM-5241	3.93	BDA-3733	3.19	BDF-3191	3.21	BE-3150	3.12	BF-1060	3.13
AM-5242	3.93	BDA-3744	3.19	BDF-3210	3.20	BE-3170	3.12	BF-1061	3.13
AM-5242E	3.93	BDA-3833	3.19	BDF-3211	3.21	BE-3200	3.12	BF-1062	3.13
AM-5243	3.93	BDA-3844	3.19	BDF-3212	3.21	BE-3205	3.12	BF-1063	3.13
AM-5243E	3.93	BDA-4230	3.19	BDF-3230	3.20	BE-3700	3.12	BF-1065	3.14
AM-5254	3.93	BDA-4231	3.19	BDF-3231	3.21	BE-3720	3.12	BF-1066	3.14
AM-5255	3.93	BDA-4233	3.19	BDF-3232	3.21	BE-3730	3.12	BF-1068	3.14
AM-5256	3.93	BDA-4240	3.19	BDF-3310	3.20	BE-3760	3.12	BF-1070	3.14
AM-5259	3.93	BDA-4241	3.19	BDF-3311	3.21	BE-3800	3.12	BF-1071	3.13
AM-5260	3.93	BDA-4244	3.19	BDF-3312	3.21	BE-3850	3.12	BF-1071S	3.13
AM-5261	3.93	BDA-4333	3.19	BDF-3330	3.20	BE-3870	3.12	BF-1072	3.13
AM-5350	3.93	BDA-4344	3.19	BDF-3331	3.21	BE-3900	3.12	BF-1072S	3.13
AM-5351	3.93	BDA-4433	3.19	BDF-3332	3.21	BE-3940	3.12	BF-1085	3.14
AM-5352	3.93	BDA-4444	3.19	BDF-3400	3.20	BE-4000	3.12	BF-1150	3.13
AM-5353	3.93	BDA-4533	3.19	BDF-4100	3.20	BE-4020	3.12	BF-1151	3.13
AM-5354	3.93	BDA-4544	3.19	BDF-4110	3.21	BE-4030	3.12	BF-1152	3.13
AM-5355	3.93	BDA-4633	3.19	BDF-4115	3.20	BE-4060	3.12	BF-1153	3.13
AM-5356	3.93	BDA-4644	3.19	BDF-4120	3.20	BE-4100	3.12	BF-1154	3.14
AM-5400	3.93	BDA-4733	3.19	BDF-4125	3.21	BE-4150	3.12	BF-1155	3.14
AM-5401	3.93	BDA-4744	3.19	BDF-4140 TIM	3.20	BE-4170	3.12	BF-1160	3.13

PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE
BF-1161	3.13	CL-130	3.26	CM-413P	3.25	CM-9500A	3.28	DC-0309	3.87
BF-1162	3.14	CL-200	3.28	CM-418R	3.26	CM-9520	3.28	DC-0310	3.87
BF-1175	3.14	CL-200A	3.28	CM-419R	3.26	CM-9521	3.28	DD-011	3.87
BF-1190	3.14	CL-203	3.28	CM-420	3.26	CM-9524	3.28	DD-013	3.87
BF-3060	3.13	CL-220	3.28	CM-420A	3.26	CM-9580	3.28	DD-040	3.87
BF-3061	3.13	CL-221	3.28	CM-420P	3.26	CM-9585	3.28	DD-040-2C	3.36
BF-3063	3.13	CL-224	3.28	CM-421R	3.26	CM-9590	3.28	DD-041	3.87
BF-3064	3.14	CL-300	3.28	CM-422R	3.26	CM-9600	3.28	DD-042	3.87
BF-3071	3.13	CL-301	3.28	CM-423	3.26	CM-9602A	3.28	DD-050	3.87
BF-3072	3.13	CL-302A	3.28	CM-423A	3.26	CM-9620	3.28	DD-051	3.87
BF-3082	3.14	CL-303A	3.28	CM-423D	3.26	CM-9621	3.28	DD-051-2C	3.36
BF-3175	3.14	CL-320	3.28	CM-423E	3.26	CM-9622	3.28	DD-051L030	3.87
BF-3190	3.14	CL-321	3.28	CM-423F	3.26	CM-9680	3.28	DD-052	3.87
BF-3191	3.14	CL-322	3.28	CM-424E	3.26	CM-9685	3.28	DD-052L030	3.87
BF-4060	3.13	CL-9102A	3.24	CM-424F	3.26	CM-9690	3.28	DD-060	3.87
BF-4061	3.13	CL-9102P	3.24	CM-425E	3.26	CP-100	3.29	DD-070	3.87
BF-4062	3.13	CL-9103A	3.24	CM-425F	3.26	CP-101	3.29	DD-151	3.87
BF-4063	3.13	CL-9103P	3.24	CM-426A	3.26	CP-105	3.29	DD-351	3.87
CH-250	3.50	CL-9110A	3.25	CM-430	3.26	CP-106	3.29	DD-551	3.87
CH-252	3.50	CL-9110P	3.25	CM-430E	3.26	CP-110	3.29	DE-052L030	3.86
CH-254	3.50	CL-9111A	3.25	CM-435E	3.26	CP-111	3.29	DE-352	3.86
CH-256	3.50	CL-9111P	3.25	CM-440E	3.26	CP-112	3.29	DE-355	3.86
CH-260	3.50	CL-9113A	3.25	CM-500	3.28	CP-113	3.29	DE-452	3.86
CH-262	3.50	CL-9113P	3.25	CM-500A	3.28	CP-9100	3.29	DE-552	3.86
CH-264	3.50	CL-9118R	3.27	CM-520	3.28	CP-9101	3.29	DE-555	3.86
CH-266	3.50	CL-9120	3.27	CM-521	3.28	CP-9105	3.29	DE-642I	3.86
CH-270	3.50	CL-9120A	3.27	CM-524	3.28	CP-9110	3.29	DE-652	3.86
CH-272	3.50	CL-9120P	3.27	CM-580	3.28	CP-9111	3.29	DE-652I	3.86
CH-274	3.50	CL-9121R	3.27	CM-585	3.28	CP-9112	3.29	DE-655I	3.86
CH-276	3.50	CL-9123	3.27	CM-590	3.28	CP-9113	3.29	DF-001	5.21
CH-280	3.50	CL-9123A	3.27	CM-600	3.28	CP-911G	3.26	DF-003	1.23
CH-282	3.50	CL-9123D	3.27	CM-602A	3.28	CP-911N	3.26	DF-004	1.23
CH-284	3.50	CL-9130	3.27	CM-620	3.28	CP-911R	3.26	DF-220	5.21
CH-286	3.50	CL-9200	3.28	CM-621	3.28	CP-911V	3.26	DF-220M08	5.21
CL-100A	3.24	CL-9200A	3.28	CM-622	3.28	CP-912G	3.26	DF-220M12	5.21
CL-100P	3.24	CL-9203	3.28	CM-680	3.28	CP-912N	3.26	DF-330	5.21
CL-101A	3.24	CL-9220	3.28	CM-685	3.28	CP-912R	3.26	DF-330M08	5.21
CL-101P	3.24	CL-9221	3.28	CM-690	3.28	CP-913R	3.26	DF-330M12	5.21
CL-102A	3.24	CL-9224	3.28	CM-9402A	3.24	CP-915R	3.26	DF-440	5.21
CL-102P	3.24	CL-9300	3.28	CM-9402P	3.24	CP-916R	3.26	DF-440M08	5.21
CL-103A	3.24	CL-9301	3.28	CM-9403A	3.24	D-500	3.87	DF-440M12	5.21
CL-103P	3.24	CL-9302A	3.28	CM-9403P	3.24	D-530-200	3.87	DF-770	5.21
CL-104A	3.24	CL-9303A	3.28	CM-9410A	3.25	D-530-30	3.87	DF-770M08	5.21
CL-104P	3.24	CL-9320	3.28	CM-9410P	3.25	D-530-50	3.87	DF-770M12	5.22
CL-105A	3.24	CL-9321	3.28	CM-9411A	3.25	D-530C-100	3.46	DF-R200L02	5.22
CL-105P	3.24	CL-9322	3.28	CM-9411P	3.25	D-530C-200	3.46	DF-R200M08	5.22
CL-106A	3.24	CM-400A	3.24	CM-9413A	3.25	D-535-200	3.87	DF-T200L03	5.22
CL-106AL	3.24	CM-400P	3.24	CM-9413P	3.25	D-535-30	3.87	DF-T200M08	5.22
CL-110A	3.25	CM-401A	3.24	CM-9418R	3.27	D-535-50	3.87	DH-200	5.22
CL-110P	3.25	CM-401P	3.24	CM-9420	3.27	D-535U40300	3.3	DH-200M08	5.22
CL-111A	3.25	CM-402A	3.24	CM-9420A	3.27	D-535U40500	3.3	DH-200M12	5.22
CL-111P	3.25	CM-402P	3.24	CM-9420P	3.27	DA-0050	3.87	DH-500	5.22
CL-112A	3.25	CM-403A	3.24	CM-9421R	3.27	DA-0051	3.87	DH-500M08	5.22
CL-112P	3.25	CM-403P	3.24	CM-9423	3.27	DA-0106	3.87	DH-500M12	5.22
CL-113A	3.25	CM-404A	3.24	CM-9423A	3.27	DA-0108	3.87	DH-700	5.22
CL-113P	3.25	CM-404P	3.24	CM-9423D	3.27	DA-0124	3.87	DH-700M08	5.22
CL-118R	3.26	CM-405A	3.24	CM-9423E	3.27	DB-0501	3.87	DH-700M12	5.22
CL-119R	3.26	CM-405P	3.24	CM-9423F	3.27	DB-0502	3.87	DHF-0020100	5.21
CL-120	3.26	CM-406A	3.24	CM-9424E	3.27	DB-0507	3.87	DHF-033M08	5.22
CL-120A	3.26	CM-406AL	3.24	CM-9424F	3.27	DB-0509	3.87	DHF-033M12	5.22
CL-120P	3.26	CM-410A	3.25	CM-9425E	3.27	DB-0510	3.87	DHF-053M08	5.22
CL-121R	3.26	CM-410P	3.25	CM-9425F	3.27	DB-0607	3.55	DHF-053M12	5.22
CL-122R	3.26	CM-411A	3.25	CM-9430	3.27	DB-0608	3.55	DH-K032050	5.22
CL-123	3.26	CM-411P	3.25	CM-9430E	3.27	DB-0610	3.55	DH-K063125	5.22
CL-123A	3.26	CM-412A	3.25	CM-9435E	3.27	DC-0301	3.87	DH-K160200	5.22
CL-123D	3.26	CM-412P	3.25	CM-9440E	3.27	DC-0302	3.87	DH-M10	5.22
CL-126A	3.26	CM-413A	3.25	CM-9500	3.28	DC-0307	3.87	DH-M10DF	5.21



PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE
DH-M12	5.22	G-6255	3.35	GL-6366	3.38	GR8B30S6000	7.4	HZ9N12110060	3.94
DH-M12DF	5.21	G-6260	3.35	GL-6433	3.37	GR8B456000	7.4	HZ9N12110080	3.94
DH-M16	5.22	G-6261	3.35	GL-6444	3.38	GR8B706000	7.4	HZ9N12150060	3.94
DH-M16DF	5.21	G-6266	3.35	GL-6455	3.38	GR8BB30	7.5	HZ9N12150080	3.94
DH-M20	5.22	G-6333	3.34	GL-6466	3.38	GR8BB45	7.5	HZ9N12A	3.94
DH-M20DF	5.21	G-6344	3.35	GL-6533	3.37	GR8BB70	7.5	HZ9N12B	3.94
DH-M25	5.22	G-6355	3.35	GL-6544	3.38	GR8BC30	7.5	HZ9N12C	3.94
DH-M25DF	5.21	G-6366	3.35	GL-6555	3.38	GR8BC45	7.5	HZ9N1F	3.94
DH-S025	5.22	G-6433	3.34	GL-6566	3.38	GR8CJ30	7.4	HZ9N2F	3.94
DH-S032	5.22	G-6444	3.35	GL-6633	3.37	GR8CJ45	7.4	HZ9NC02	3.94
DH-S040	5.22	G-6455	3.35	GL-6644	3.38	GR8CJ70	7.4	HZ9NC04	3.94
DH-S050	3.22	G-6466	3.35	GL-6655	3.38	GR8CD30	7.4	HZ9NM08-0200	3.94
DMA	6.7	G-6533	3.34	GL-6666	3.38	GR8CJD45	7.4	HZ9NP02	3.94
DMS	6.5	G-6544	3.35	GL-6733	3.37	GR8CM4545	7.4	HZ9NP04	3.94
E-0220	3.30	G-6555	3.35	GL-6744	3.38	GR8CM7045	7.4	HZ9P400318	4.10
E-0222	3.30	G-6566	3.35	GL-6755	3.38	GR8ECI45	7.4	HZ9P400618	4.10
E-0240	3.30	G-6633	3.34	GL-6766	3.38	GR8EOA	7.4	HZ9P401018	4.10
E-0244	3.30	G-6644	3.35	GL-6833	3.37	GR8HD4545	7.4	HZ9P500314	4.10
E-0270	3.30	G-6655	3.35	GL-6844	3.38	GR8HD7070	7.4	HZ9P500614	4.10
E-0277	3.30	G-6666	3.35	GL-6855	3.38	GR8IK	7.4	HZ9P501014	4.10
E-0420	3.31	G-6733	3.34	GL-6866	3.38	GR8LH	7.4	HZ9P630314	4.10
E-0422	3.31	G-6744	3.35	GP-6100	3.36	GR8MF40	7.5	HZ9P630614	4.10
E-0440	3.31	G-6755	3.35	GP-6110	3.36	GR8MF50	7.5	HZ9P631014	4.10
E-0444	3.31	G-6766	3.35	GP-611212	3.36	GR8MFGL	7.5	HZ9PB400318	4.10
E-0470	3.31	G-6833	3.34	GP-611806	3.36	GR8MP12	7.5	HZ9PB400618	4.10
E-0477	3.31	G-6844	3.35	GP-6210	3.39	GR8MP18	7.5	HZ9PB401018	4.10
E-0522	3.30	G-6855	3.35	GP-6211	3.39	GR8MP19	7.5	HZ9PB500314	4.10
E-0622	3.30	G-6866	3.35	GP-6212	3.39	GR8MP30	7.5	HZ9PB500614	4.10
E-0722	3.30	G-7230	3.41	GP-6220	3.39	GR8RJ30	7.4	HZ9PB501014	4.10
E-0822	3.31	G-7231	3.41	GP-6221	3.39	GR8RJ45	7.4	HZ9PB630314	4.10
E-0922	3.31	G-7233	3.41	GP-6222	3.39	GR8SCB30	7.4	HZ9PB630614	4.10
E-1022	3.31	G-7290	3.41	GP-6230	3.39	GR8SCI30	7.4	HZ9PB631014	4.10
E-15402A	3.32	G-7291	3.41	GP-6231	3.39	GR8SM3030	7.4	HZ9PBS400318	4.10
E-15403A	3.32	G-7299	3.41	GP-6232	3.39	GR8SR40	7.5	HZ9PBS400618	4.10
E-15412A	3.32	G-7333	3.41	GP-6240	3.39	GR8SR50	7.5	HZ9PBS401018	4.10
E-15420	3.32	G-7399	3.41	GP-6241	3.39	GR8SR50M8	7.5	HZ9PBS500314	4.10
E-15420A	3.32	G-7433	3.41	GP-6242	3.39	GR8SS50	7.5	HZ9PBS500614	4.10
E-15422G	3.32	G-7499	3.41	GP-6285	3.39	GR8SV	7.5	HZ9PBS501014	4.10
E-15422N	3.32	G-7533	3.41	GP-6310	3.36	GZR-100	3.46	HZ9PBS630314	4.10
E-15422R	3.32	G-7599	3.41	GP-6311	3.36	GZR-101	3.46	HZ9PBS630614	4.10
E-4500	3.30	G-7885	3.41	GP-6312	3.36	GZR-102	3.46	HZ9PBS631014	4.10
E-4505	3.30	G-7900-02	3.41	GP-6320	3.36	GZR-V10004	3.39	HZE0B08GM	4.5
F-0220	3.33	G-7900-03	3.41	GP-6321	3.36	GZR-V10006	3.39	HZE0B08GMV	4.5
F-0222	3.33	G-7900-04	3.41	GP-6322	3.36	GZR-V10008	3.39	HZE0C08GM	4.6
F-0240	3.33	G-7900-05	3.41	GP-6330	3.36	GZR-V20004	3.39	HZE0D08GM	4.6
F-0244	3.33	G-7900-06	3.41	GP-6331	3.36	GZR-V20006	3.39	HZE0F08G	4.3
F-0270	3.33	G-7900-07	3.41	GP-6332	3.36	GZR-V20008	3.39	HZE0L08G	4.4
F-0277	3.33	G-7900-08	3.41	GP-6340	3.36	GZR-V20L004	3.39	HZE0N08G	4.7
F-0522	3.33	G-7900-09	3.41	GP-6341	3.36	GZR-V20L006	3.39	HZE0P08G	4.7
F-0544	3.33	G-7900-10	3.41	GP-6342	3.36	GZR-V20L008	3.39	HZE0R08G	4.4
F-0577	3.33	G-7900-11	3.41	GP-6380	3.36	GZR-VV1006	3.20	HZE0R08GM	4.4
F-0622	3.33	G-7900-12	3.41	GP-6385	3.36	GZR-VV1008	3.20	HZE0R08GMV	4.4
F-0644	3.33	GL-6230	3.37	GP-6400-1	3.36	GZR-VV1010	3.20	HZE0S08G	4.8
F-0677	3.33	GL-6231	3.37	GP-6400-2	3.36	HA ...	5.2	HZE0Y08G	4.7
F-0722	3.33	GL-6233	3.37	GP-6400-5	3.36	HAR ...	5.5	HZE0Z200	4.9
F-0744	3.33	GL-6240	3.38	GP-6411	3.39	HB ...	5.6	HZE0Z210	4.9
F-0777	3.33	GL-6241	3.38	GP-6512-01MF	3.36	HC ...	5.9	HZE0Z300	4.9
F-4500	3.33	GL-6244	3.38	GP-6512-02MF	3.36	HD ...	5.13	HZE0Z310	4.9
F-4505	3.33	GL-6250	3.38	GP-6512-03MF	3.36	HEA ...	5.20	HZE0Z401	4.9
G-6230	3.34	GL-6251	3.38	GP-6512-05MF	3.36	HEC ...	5.20	HZE0Z402	4.9
G-6231	3.34	GL-6255	3.38	GP-6512-06MF	3.36	HED ...	5.20	HZE0Z600	4.9
G-6233	3.34	GL-6260	3.38	GP-6514-01MF	3.36	HFA ...	5.20	HZE0Z600SS	4.9
G-6240	3.35	GL-6261	3.38	GP-6514-02MF	3.36	HFC ...	5.20	HZE0Z601	4.9
G-6241	3.35	GL-6266	3.38	GP-6514-03MF	3.36	HGC ...	5.16	HZE0Z602	4.9
G-6244	3.35	GL-6333	3.37	GP-6514-05MF	3.36	HGO ...	5.18	HZE0Z603	4.9
G-6250	3.35	GL-6344	3.38	GP-6514-06MF	3.36	HGU ...	5.19	HZE0Z610	4.9
G-6251	3.35	GL-6355	3.38	GP-651418	3.36	HZ9464G	4.10	HZE0Z611	4.9

PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE
HZE0Z660	4.9	HZE2Z654	4.9	KF-10160AS	1.8	KF-15050	1.4	KLF-14125	1.4
HZE1B10GM	4.5	HZE2Z658	4.9	KF-10200A	1.8	KF-15080	1.4	KM-032000	5.22
HZE1B10GMV	4.5	HZE2Z660	4.9	KF-10200AS	1.8	KF-15125	1.4	KM-032050-1	5.22
HZE1B15GM	4.5	HZE2Z670	4.9	KF-10250AC	1.9	KF-15160	1.8	KM-063100-1	5.22
HZE1B15GMV	4.5	HZE7Z400	4.9	KF-10320AC	1.9	KF-15250	1.9	KM-125000-1	5.22
HZE1C10GM	4.6	HZE7Z470	4.9	KF-11032	1.4	KF-15320	1.9	L1-N...	2.3
HZE1C15GM	4.6	HZE7Z480	4.9	KF-11032S	1.4	KF-17032	1.4	L6...	2.4
HZE1D10GM	4.6	HZE7Z490	4.9	KF-11040	1.4	KF-17040	1.4	LAE	6.8
HZE1D15GM	4.6	HZRE10	4.11	KF-11040S	1.4	KF-17050	1.4	LAGE	6.8
HZE1F10G	4.3	HZRE20	4.11	KF-11050	1.4	KF-17080	1.4	LAGP	6.7
HZE1F15G	4.3	HZRM08G	4.12	KF-11050S	1.4	KF-17125	1.4	LCA	6.5
HZE1L10G	4.4	HZRM310	4.12	KF-11063	1.4	KF-17160	1.8	LCE	6.8
HZE1L15G	4.4	HZRM310A	4.12	KF-11063S	1.4	KF-17250	1.9	LCG	6.5
HZE1N10G	4.7	HZRM603	4.12	KF-11080	1.4	KF-17320	1.9-	LCJ	6.5
HZE1N15G	4.7	HZRM603A	4.12	KF-11080S	1.4	KF-19032	1.4	LCL	6.6
HZE1P10G	4.7	HZRM610	4.12	KF-11100	1.4	KF-19032CN	1.4	LCM	6.6
HZE1P15G	4.7	HZRM611	4.12	KF-11100S	1.4	KF-19032CTA	1.4	LCO	6.6
HZE1R10GM	4.4	HZRM652	4.12	KF-11125	1.4	KF-19032SC	1.4	LCP	6.5
HZE1R10GMV	4.4	HZRM654	4.12	KF-11125S	1.4	KF-19040	1.4	LCT	6.5
HZE1R15GM	4.4	HZRM658	4.12	KF-11160	1.8	KF-19040050CN	1.4	LCX	6.6
HZE1R15GMV	4.4	HZRP1008GA	4.11	KF-11160S	1.8	KF-19040CTA	1.4	LCY	6.6
HZE1RL10GM	4.4	HZRP1008GB	4.11	KF-11200	1.8	KF-19040SC	1.4	LCZ	6.5
HZE1RL15GM	4.4	HZRP1008GC	4.11	KF-11200S	1.8	KF-19050	1.4	LGE	6.8
HZE1S10G	4.8	HZRP12	4.11	KF-11250C	1.9	KF-19050CTA	1.4	LGP	6.7
HZE1S15G	4.8	HZRP1310	4.11	KF-11320C	1.9	KF-19050SC	1.4	LNE	6.8
HZE1Y10G	4.7	HZRP2008GA	4.11	KF-12032	1.4	KF-19063	1.4	LSL	6.6
HZE1Y15G	4.7	HZRP2008GB	4.11	KF-12040	1.4	KF-19063080CN	1.4	LSP	6.6
HZE1Z200	4.9	HZRP2008GC	4.11	KF-12050	1.4	KF-19063CTA	1.4	LSP50U	6.6
HZE1Z210	4.9	HZRP2008GD	4.11	KF-12063	1.4	KF-19063SC	1.4	LTP	6.6
HZE1Z300	4.9	HZRP2008GE	4.11	KF-12080	1.4	KF-19080	1.4	LUP	6.6
HZE1Z310	4.9	HZRP2310	4.11	KF-12100	1.4	KF-19080CTA	1.4	M...	1.2
HZE1Z401	4.9	IBM	6.4	KF-12125	1.4	KF-19080SC	1.4	MF-12008	1.2
HZE1Z402	4.9	IBP	6.4	KF-12160	1.8	KF-19100	1.4	MF-12012	1.2
HZE1Z600	4.9	J1...	1.29	KF-12200	1.8	KF-19100125CN	1.4	MF-12020	1.2
HZE1Z600SS	4.9	J3...	1.30	KF-12250	1.9	KF-19100CTA	1.4	MF-13008	1.2
HZE1Z601	4.9	J64RS...	1.30	KF-12320	1.9	KF-19100SC	1.4	MF-13012	1.2
HZE1Z602	4.9	J64RT2...	1.31	KF-13032	1.4	KF-19125CTA	1.4	MF-13020	1.2
HZE1Z603	4.9	J65...	1.31	KF-13040	1.4	KF-19125SC	1.4	MF-15008	1.2
HZE1Z610	4.9	JL...	1.32	KF-13050	1.4	KF-19160200CN	1.8	MF-15012	1.2
HZE1Z611	4.9	JT...	1.33	KF-13063	1.4	KF-19160CTA	1.8	MF-15020	1.2
HZE1Z652	4.9	JX1...	1.33	KF-13080	1.4	KF-19200CTA	1.8	MF-15032	1.2
HZE1Z654	4.9	JX2...	1.33	KF-13100	1.4	KF-22025	1.2	MF-17008	1.2
HZE1Z658	4.9	K...	1.8-1.9	KF-13125	1.4	KF-22040	1.4	MF-17012	1.2
HZE1Z660	4.9	KD...	1.7	KF-13160	1.8	KF-22050	1.4	MF-17020	1.2
HZE1Z670	4.9	KDF-14032	1.7	KF-13200	1.8	KF-22080	1.4	MF-17032	1.2
HZE2B15GM	4.5	KDF-14040	1.7	KF-13250	1.9	KF-23025	1.2	MF-20008	1.2
HZE2B15GMV	4.5	KDF-14050	1.7	KF-14032	1.6	KF-23040	1.4	MF-20012	1.2
HZE2C15GM	4.6	KDF-14063	1.7	KF-14032AP	1.6	KF-23050	1.4	MF-20020	1.2
HZE2D15GM	4.6	KDF-14080	1.7	KF-14040	1.6	KF-23080	1.4	MF-21008	1.2
HZE2F15G	4.3	KDF-14100	1.7	KF-14040AP	1.6	KF-24020	1.19	MF-21012	1.2
HZE2L15G	4.4	KDF-14125	1.7	KF-14050	1.6	KF-24032	1.4	MF-21016	1.2
HZE2R15GM	4.4	KE...	1.6	KF-14050AP	1.6	KF-24040	1.4	MF-21020	1.2
HZE2R15GMV	4.4	KF-10032A	1.4	KF-14063	1.6	KF-24050	1.4	MF-22016	1.2
HZE2RL15GM	4.4	KF-10032AS	1.4	KF-14063AP	1.6	KF-24080	1.4	MF-22020	1.2
HZE2Z210	4.9	KF-10040A	1.4	KF-14080	1.6	KF-41032	1.11	MF-22025	1.2
HZE2Z300	4.9	KF-10040AS	1.4	KF-14080AP	1.6	KF-41040050	1.4	MF-23012	1.2
HZE2Z310	4.9	KF-10050A	1.4	KF-14100	1.6	KF-41063080	1.4	MF-23020	1.2
HZE2Z500	4.9	KF-10050AS	1.4	KF-14100AP	1.6	KF-41100125	1.4	MF-24012	1.2
HZE2Z501	4.9	KF-10063A	1.4	KF-14125	1.6	KF-41160200	1.8	MF-24020	1.2
HZE2Z600	4.9	KF-10063AS	1.4	KF-14125AP	1.6	KF-41250	1.9	NFZ...	2.9
HZE2Z600SS	4.9	KF-10080A	1.4	KF-14160	1.8	KL...	1.4	NQZ...	2.8
HZE2Z601	4.9	KF-10080AS	1.4	KF-14160AP	1.8	KLF-14032	1.4	NTZ...	2.8
HZE2Z602	4.9	KF-10100A	1.4	KF-14200	1.8	KLF-14040	1.4	OV...	1.19
HZE2Z603	4.9	KF-10100AS	1.4	KF-14200AP	1.8	KLF-14050	1.4	OVF-11018	1.19
HZE2Z610	4.9	KF-10125A	1.4	KF-14250	1.9	KLF-14063	1.4	OVF-11025	1.19
HZE2Z611	4.9	KF-10125AS	1.4	KF-15032	1.4	KLF-14080	1.4	OVF-11032	1.19
HZE2Z652	4.9	KF-10160A	1.8	KF-15040	1.4	KLF-14100	1.4	OVF-11040	1.19

PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE
OVF-11050	1.19	P10F24424	3.63	P10SF505	3.63	P15D26124	3.72	P15F733	3.71
OVF-11063	1.19	P10F26024	3.63	P10SF515	3.64	P15D26624	3.72	P15F74424	3.72
OVF-11080	1.19	P10F26124	3.63	P10SF550	3.63	P15D34424	3.72	P15F76624	3.72
OVF-12018	1.19	P10F26624	3.63	P10SF560	3.63	P15D36624	3.72	P15F78824	3.76
OVF-12025	1.19	P10F28024	3.67	P10SF570	3.63	P15D44424	3.72	P15F79924	3.76
OVF-12032	1.19	P10F28124	3.67	P10SS1204M	3.63-3.66	P15D46624	3.72	P15F833	3.71
OVF-12040	1.19	P10F28824	3.67	P10SS1206M	3.63-3.66	P15D54424	3.72	P15F84424	3.72
OVF-12050	1.19	P10F29024	3.67	P10SS1208M	3.63-3.66	P15D56624	3.72	P15F86624	3.72
OVF-12063	1.19	P10F29124	3.67	P10SS1210M	3.63-3.66	P15D64424	3.72	P15F88824	3.76
OVF-12080	1.19	P10F29924	3.67	P10SS1212M	3.63-3.66	P15D66624	3.72	P15F89924	3.76
OVF-13018	1.19	P10F333	3.62	P10SS1404M	3.63-3.66	P15D74424	3.72	P15SB100	3.75
OVF-13025	1.19	P10F34424	3.63	P10SS1406M	3.63-3.66	P15D76624	3.72	P15SB110	3.75
OVF-13032	1.19	P10F36624	3.63	P10SS1408M	3.63-3.66	P15D84424	3.72	P15SB200	3.75
OVF-13040	1.19	P10F38824	3.67	P10SS1410M	3.63-3.66	P15D86624	3.72	P15SB210	3.75
OVF-13050	1.19	P10F39924	3.67	P10SS1412M	3.63-3.66	P15EB250...	3.82	P15SB300	3.75
OVF-13063	1.19	P10F433	3.62	P10STR01	3.63	P15EB251...	3.82	P15SB310	3.75
OVF-13080	1.19	P10F44424	3.63	P10STR02	3.63	P15EB255...	3.82	P15SB400	3.75
P10B230	3.64	P10F46624	3.63	P10STR05	3.63	P15EB355...	3.82	P15SB410	3.75
P10B231	3.64	P10F48824	3.67	P15B230	3.74	P15EB455...	3.82	P15SB500	3.75
P10B233	3.64	P10F49924	3.67	P15B231	3.74	P15EB555...	3.82	P15SB502	3.78
P10B24024	3.65	P10F533	3.62	P15B233	3.74	P15EB655...	3.82	P15SB505	3.75
P10B24124	3.65	P10F54424	3.63	P15B24024	3.74	P15EB755...	3.82	P15SB550	3.75
P10B24424	3.65	P10F56624	3.63	P15B24124	3.74	P15EB855...	3.82	P15SB560	3.75
P10B26024	3.65	P10F58824	3.67	P15B24424	3.74	P15EF250...	3.80	P15SB570	3.75
P10B26124	3.65	P10F59924	3.67	P15B26024	3.74	P15EF251...	3.80	P15SF100	3.73
P10B26624	3.65	P10F633	3.62	P15B26124	3.74	P15EF255...	3.80	P15SF110	3.73
P10B28024	3.68	P10F64424	3.63	P15B26624	3.74	P15EF355...	3.80	P15SF200	3.73
P10B28124	3.68	P10F66624	3.63	P15B28024	3.77	P15EF455...	3.80	P15SF210	3.73
P10B28824	3.68	P10F68824	3.67	P15B28124	3.77	P15EF555...	3.80	P15SF300	3.73
P10B29024	3.68	P10F69924	3.67	P15B28824	3.77	P15EF655...	3.80	P15SF310	3.73
P10B29124	3.68	P10F733	3.62	P15B29024	3.77	P15EF755...	3.80	P15SF400	3.73
P10B29924	3.68	P10F74424	3.63	P15B29124	3.77	P15EF855...	3.80	P15SF410	3.73
P10B333	3.64	P10F76624	3.63	P15B29924	3.77	P15F230	3.71	P15SF499-02	3.81
P10B34424	3.65	P10F78824	3.67	P15B333	3.74	P15F231	3.71	P15SF499-03	3.81
P10B36624	3.65	P10F79924	3.67	P15B34424	3.74	P15F233	3.71	P15SF499-04	3.81
P10B38824	3.68	P10F833	3.62	P15B36624	3.74	P15F24024	3.72	P15SF499-05	3.81
P10B39924	3.68	P10F84424	3.63	P15B38824	3.77	P15F24124	3.72	P15SF499-06	3.81
P10B433	3.64	P10F86624	3.63	P15B39924	3.77	P15F24424	3.72	P15SF499-07	3.81
P10B44424	3.65	P10F88824	3.67	P15B433	3.74	P15F26024	3.72	P15SF499-08	3.81
P10B46624	3.65	P10F89924	3.67	P15B44424	3.74	P15F26124	3.72	P15SF499-09	3.81
P10B48824	3.68	P10SB100	3.65	P15B46624	3.74	P15F26624	3.72	P15SF499-10	3.81
P10B49924	3.68	P10SB107	3.65	P15B48824	3.77	P15F28024	3.76	P15SF500	3.73
P10B533	3.64	P10SB110	3.65	P15B49924	3.77	P15F28124	3.76	P15SF505	3.73
P10B54424	3.65	P10SB117	3.65	P15B533	3.74	P15F28824	3.76	P15SF515	3.73
P10B56624	3.65	P10SB200	3.65	P15B54424	3.74	P15F29024	3.76	P15SF550	3.73
P10B58824	3.68	P10SB207	3.65	P15B56624	3.74	P15F29124	3.76	P15SF560	3.73
P10B59924	3.68	P10SB210	3.65	P15B58824	3.77	P15F29924	3.76	P15SF570	3.73
P10B633	3.64	P10SB217	3.65	P15B59924	3.77	P15F333	3.71	P15SS1204M	3.73
P10B64424	3.65	P10SB304	3.65	P15B633	3.74	P15F34424	3.72	P15SS1204MFP	3.73
P10B66624	3.65	P10SB314	3.65	P15B64424	3.74	P15F36624	3.72	P15SS1204MP	3.73
P10B68824	3.68	P10SB404	3.65	P15B66624	3.74	P15F38824	3.76	P15SS1206M	3.73
P10B69924	3.68	P10SB414	3.65	P15B68824	3.77	P15F39924	3.76	P15SS1208M	3.73
P10B733	3.64	P10SB500	3.65	P15B69924	3.77	P15F433	3.71	P15SS1208MF	3.73
P10B74424	3.65	P10SB502	3.69	P15B733	3.74	P15F44424	3.72	P15SS1404M	3.73
P10B76624	3.65	P10SB505	3.65	P15B74424	3.74	P15F46624	3.72	P15SS1404MFP	3.73
P10B78824	3.68	P10SB550	3.65	P15B76624	3.74	P15F48824	3.76	P15SS1404MP	3.73
P10B79924	3.68	P10SB560	3.65	P15B78824	3.77	P15F49924	3.76	P15SS1406M	3.73
P10B833	3.64	P10SB570	3.65	P15B79924	3.77	P15F533	3.71	P15SS1408M	3.73
P10B84424	3.65	P10SF100	3.63	P15B833	3.74	P15F54424	3.72	P15SS1408MF	3.73
P10B86624	3.65	P10SF110	3.63	P15B84424	3.74	P15F56624	3.72	P15STR01	3.73
P10B88824	3.68	P10SF200	3.63	P15B86624	3.74	P15F58824	3.76	P15STR02	3.73
P10B89924	3.68	P10SF210	3.63	P15B88824	3.77	P15F59924	3.76	P15STR05	3.73
P10F230	3.62	P10SF300	3.64	P15B89924	3.77	P15F633	3.71	PRP	6.7
P10F231	3.62	P10SF310	3.64	P15D24024	3.72	P15F64424	3.72	PS14100	3.45
P10F233	3.62	P10SF400	3.64	P15D24124	3.72	P15F66624	3.72	PS14200	3.45
P10F24024	3.63	P10SF410	3.64	P15D24424	3.72	P15F68824	3.76	PS15000	3.45
P10F24124	3.63	P10SF500	3.63	P15D26024	3.72	P15F69924	3.76	PS15100	3.45

PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE	PART NO.	PAGE
PS15200	3.45	RPF-14050	1.11	TSCFN16D0500	3.20				
PS15300	3.45	RPF-14063	1.11	TSCFN16D1000	3.20				
PS15310	3.46	RPF-28016	1.11	TSCFN24S000	3.20				
PS15320	3.46	RPF-28020	1.11	TSCFN24S0300	3.20				
PS15330	3.46	RPF-28025	1.11	TSCFN24S0500	3.20				
PS15340	3.46	RPF-28032	1.11	TSCFN24S1000	3.20				
PS15350	3.46	RPF-28040	1.11	TSCFN32S0300	3.75				
PS15360	3.46	RPF-28050	1.11	TSCFN32S0500	3.75				
PS15370	3.46	RPF-28063	1.11	TSCFN32S1000	3.75				
PSC26024	3.43	RQ...	1.17	TSCFN36S000	3.75				
PSC26124	3.43	RS...	1.16	TZ-F478	3.85				
PSC26624	3.43	RSF-09032	1.11	TZ-F4M12	3.85				
PSC36624	3.43	RSF-09040	1.11	TZ-F578	3.85				
PSC46624	3.43	RSF-09050	1.11	TZ-F5M12	3.85				
PSC56624	3.43	RSF-09063	1.11	TZ-F5M12-B	3.85				
PSC66624	3.43	RSF-09080	1.12	TZ-M4M12-D	3.85				
PSC76624	3.43	RSF-09100	1.12	TZ-M578	3.85				
PSC86624	3.43	RT...	2.6	TZ-M578T	3.85				
PSK100145	3.46	RTF-12025	2.6	TZ-M5M12	3.85				
PSK200145	3.46	RTF-13025	2.6	TZ-M5M12-B	3.85				
PSK200290	3.46	RV...	1.23	TZ-M5M12-BT	3.85				
PSK200725	3.46	RW...	1.23	UBF	6.8				
PSK300145	3.46	S1...	1.25	UBH	6.4				
PSK401	3.46	S5...	1.26	UBK	6.8				
PSP26024	3.44	SF-12016	1.25	UBM	6.4				
PSP26124	3.44	SF-12025	1.25	UBP	6.4				
PSP26624	3.44	SF-12032	1.25	UBQ	6.4				
PSP36624	3.44	SF-12040	1.25	UBS	6.4				
PSP46624	3.44	SF-12050	1.25	UBT	6.4				
PSP56624	3.44	SF-13016	1.25	UDP	6.4				
PSP66624	3.44	SF-13025	1.25	UFL	6.4				
PSP76624	3.44	SF-13032	1.25	UGM	6.7				
PSP86624	3.44	SF-13040	1.25	UGP	6.7				
PSR220	3.44	SF-13050	1.25	UHL	6.4				
PSR221	3.44	SF-24016	1.25	UNM	6.5				
PSR222	3.44	SF-24025	1.25	UNP	6.5				
PSR223	3.44	SF-24032	1.25	VL1...	1.27				
PSR322	3.44	SF-26016	1.25	W...	1.20				
PSR422	3.44	SF-26025	1.25	WF-50012	1.20				
PSR522	3.44	SF-26032	1.25	WF-50020	1.20				
PSR622	3.44	SF-27016	1.25	WF-50032	1.20				
PSR722	3.44	SF-27025	1.25	WF-50040	1.20				
PSR822	3.44	SF-27032	1.25	WF-50050	1.20				
R...	1.21	SF-28016	1.25	WF-50063	1.20				
RM...	1.12	SF-28025	1.25	WF-50080	1.20				
RN...	1.14	SF-28032	1.25	YDA...	1.34				
RO...	1.13	TC8I412	3.85	YDG...	1.34				
RP...	1.11	TC8I808	3.85	YDR...	1.34				
RPF-10040A	1.11	TC8U412	3.85	YF...	3.95				
RPF-10050A	1.11	TCR1616	3.85	YFDA-0211	3.95				
RPF-10063A	1.11	TCR32ID	3.85	YFDA-0223	3.95				
RPF-11016	1.11	TCR32UD	3.85	YFDA-0224	3.95				
RPF-11020	1.11	TCXC	3.84	YFDB-0211	3.95				
RPF-11025	1.11	TCXD	3.84	YFDB-0223	3.95				
RPF-12016	1.11-1.13	TCXP	3.84	YFDB-0224	3.95				
RPF-12020	1.11-1.13	TCXPN	3.84	YG-6300	3.96				
RPF-12025	1.11-1.13	TIM06B	3.46	YMA...	2.10				
RPF-12040	1.11-1.13	TIM06M	3.46	YMP...	2.10				
RPF-12050	1.11-1.13	TIM1024	3.63	YR2...	1.22				
RPF-12063	1.11-1.13	TIM10B	3.46	YR240...	3.90				
RPF-13016	1.11-1.13	TIM10M	3.46	YR250...	3.90				
RPF-13020	1.11-1.13	TIM151806	3.73	YR260...	3.90				
RPF-13025	1.11-1.13	TIM1524	3.73	YR270...	3.91				
RPF-13040	1.11-1.13	TIM1536	3.73	YR280...	3.91				
RPF-13050	1.11-1.13	TIM20M	3.46	YR3...	1.23				
RPF-13063	1.11-1.13	TSCF000	3.46						
RPF-14040	1.11	TSCFN16D0300	3.20						



>

>

>

>



UNIVER S.p.A.

Headquarters

I - 20128 Milano

Via Eraclito, 31

Tel. +39 02 25298.1

Fax +39 02 2575254

info@univer-group.com

www.univer-group.com

UNIVER SERVICE S.r.l.

Headquarters

I - 20128 Milano

Via Empedocle, 20

Tel. +39 02 25298.1

Fax +39 02 25298370

universervice@universervice.it

www.universervice.it

Branch Offices

LOMBARDIA

I - 20128 Milano

Via Empedocle, 20

Tel. +39 02 25298.1

Fax +39 02 25298370

universervice@universervice.it

I - 24060 Castelli Calepio **Bergamo**

Via C. Curotti, 31/33

Tel. +39 030 7435420

Fax +39 030 733328

castellicalepio@universervice.it

I - 22040 Monguzzo **Como**

Via Valassina, 18

Tel. +39 031 617922

Fax +39 031 651222

monguzzo@universervice.it

PIEMONTE/LIGURIA/VALLE D'AOSTA

I - 10071 Borgaro Torinese **Torino**

Via Veneto, 18

Tel. +39 011 4501871

Fax +39 011 4502898

torino@universervice.it

VENETO/FRIULI VENEZIA-GIULIA

TRENTINO-ALTO ADIGE

I - 30030 Vigonovo **Venezia**

Via Prima strada 16/A - Loc. Galta

Tel. +39 049 9834140

Fax +39 049 9833972

vigono@universervice.it

EMILIA ROMAGNA

I - 40069 Zola Predosa **Bologna**

Via Guido Rossa, 21

Tel. +39 051 753907

Fax +39 051 6184751

bologna@universervice.it

CENTER/SOUTH

I - 40069 Zola Predosa **Bologna**

Via Guido Rossa, 21

Tel. +39 051 753907

Fax +39 051 6184751

bologna@universervice.it

UNIVER DO BRASIL S/A

BRAZIL - 13474-764

Americana **São Paulo - SP**

Rua do Polyester, 29

Distrito Industrial Abdo Najar

Tel. +55 19 3113-9400

Fax +55 19 3113-9405

atendimento@univer.com.br

UNIVER CHINA

CHINA - Shanghai

399 Fu Te North Road,

Free Zone, Pudong

info@univer-china.com

UNIVER FRANCE S.a.s.

FRANCE - 68000

Colmar

1, rue Denis Papin

Tel. +33 03 89210900

Fax +33 03 89216850

info@univer-france.fr

UNIVER G.m.b.H.

GERMANY - D-65428

Rüsselsheim

Eisenstraße 51

Tel. +49 6142 40832-0

Fax +49 6142 40832-90

info@univer-gmbh.de

UNIVER NORTH AMERICA

USA - 48312

Sterling Heights - **Michigan**

6620 Cobb Drive

Tel. +1 248 299 0525

Fax +1 248 299 0528

info@univer-group.us

UNIVER POLSKA Sp. z o.o.

POLAND - 25-663

Kielce

ul. K. Olszewskiego 21E

Tel. +48 41 278 72 53

Fax +48 41 278 72 54

univer@univer-group.pl

UNIVER S.L.

SPAIN - 08210

Barbera Del Valles **Barcelona**

Ronda Industria, 26 - 28

Tel. +34 93 7297360

Fax +34 93 7297380

univer@univerweb.com

Distributors worldwide:

Get in touch with UNIVER Sales Department
or visit our website www.univer-group.com



UNIVER S.p.A.
Headquarters

I - 20128 **Milano**
Via Eraclito, 31
Tel. +39 02 25298.1
Fax +39 02 2575254
info@univer-group.com
www.univer-group.com



www.univer-group.com